Day 5: Review and PracticePractical

Objective

To verify that all three PCs can communicate with each other and with the wireless router using the ping command.

Procedure

Step 1: Open Command Prompt

1. Click PC0 in Cisco Packet Tracer.
2. Select the **Desktop** tab.
3. Open **Command Prompt**.

Step 2: Ping the Router

Type:

ping 192.168.10.1

If replies are received, PC0 can communicate with the router's LAN interface.

Step 3: Ping the Other PCs

From PC0, execute:

ping 192.168.10.12

ping 192.168.10.13

These commands test connectivity between PC0 and the other two PCs.

Step 4: Verify from Other PCs

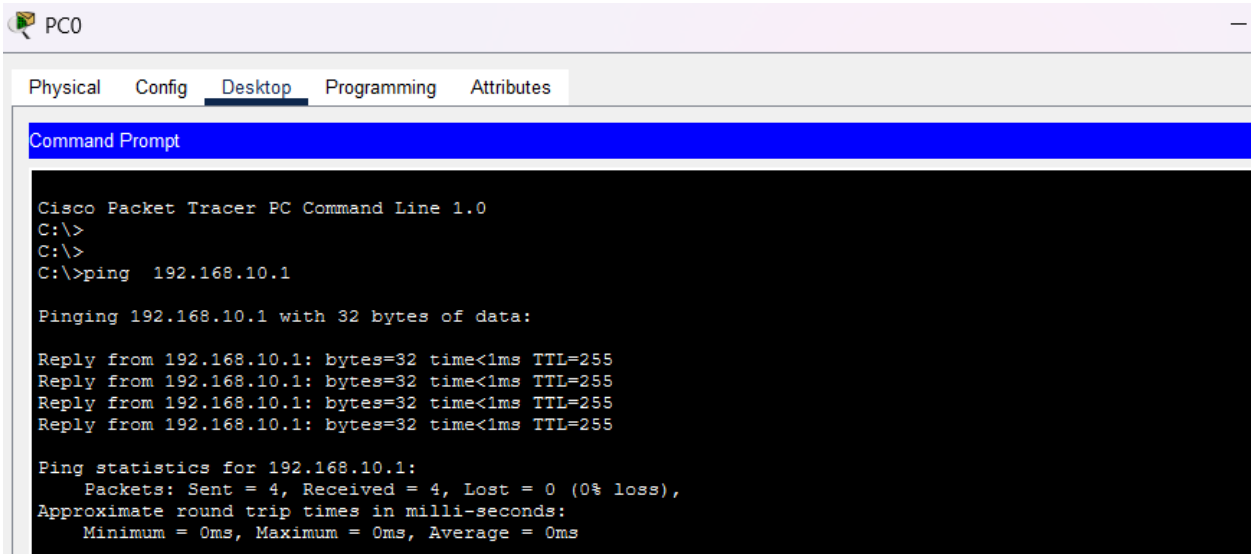
Repeat the ping tests from PC1 and PC2 using the destination IP addresses from the IP addressing table.

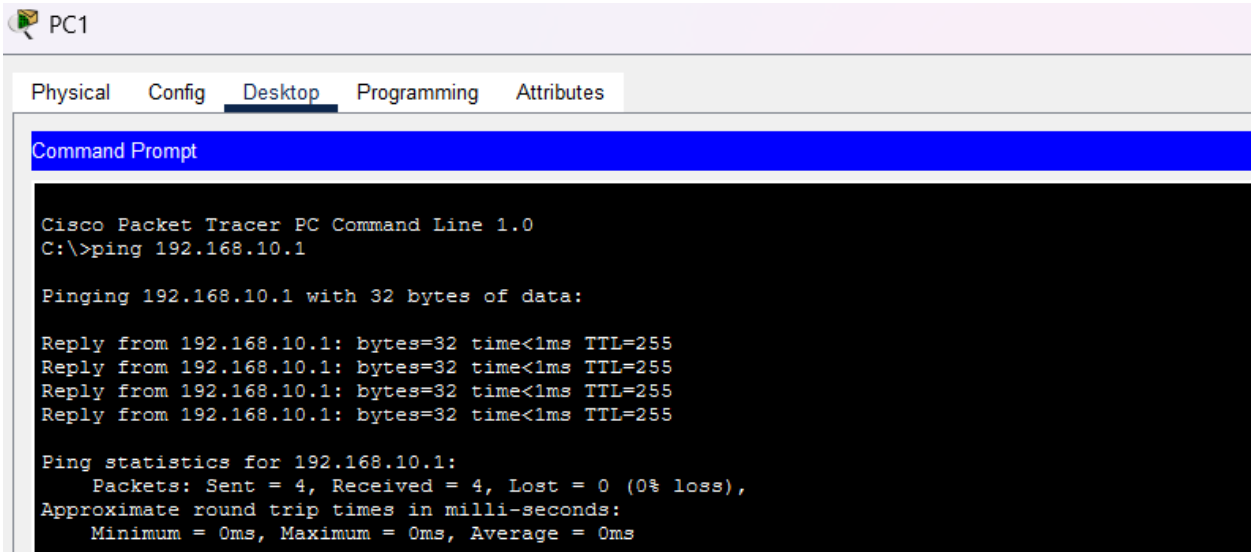
Expected Result

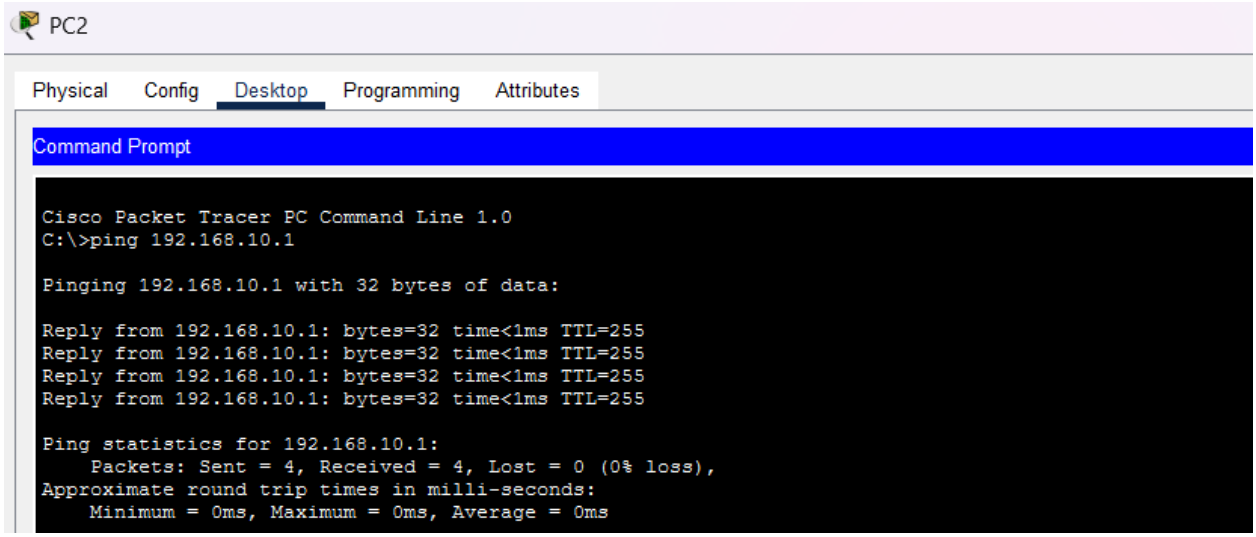
Successful ping tests display replies from the destination IP address. This confirms that the devices can communicate over the local network.

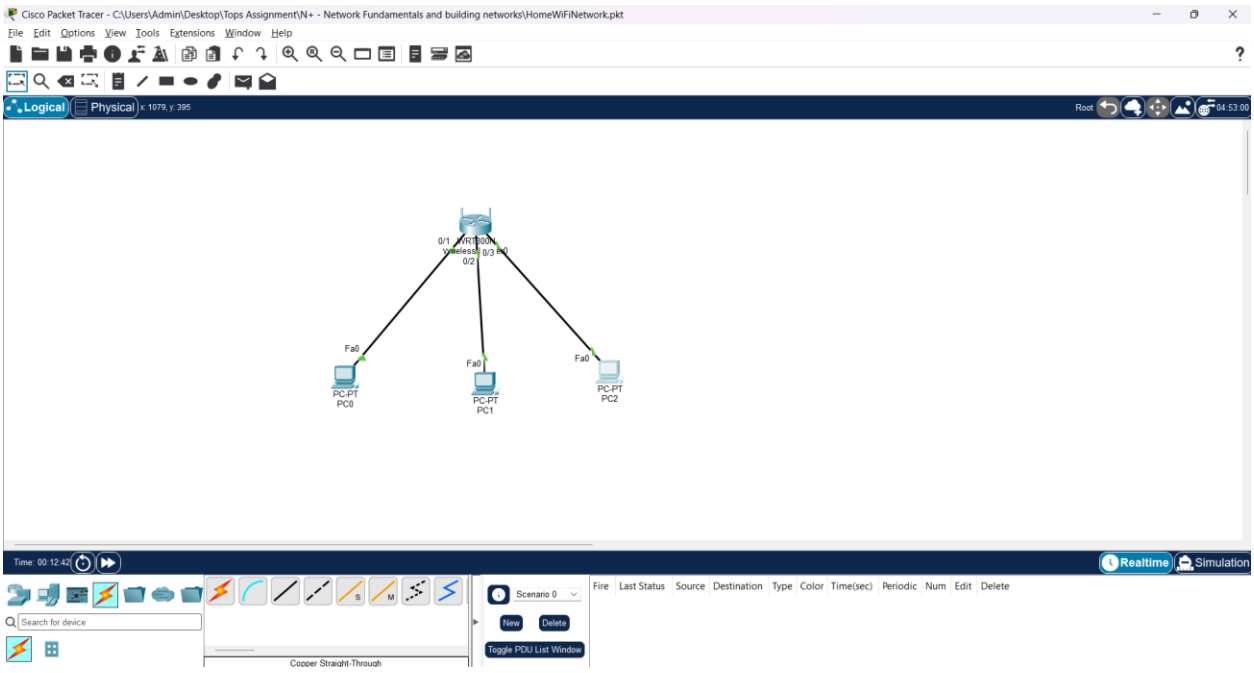
If a ping fails, check the IP addresses, subnet masks, cable connections, and router LAN configuration.

Screenshot:


PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>
C:\>
C:\>ping 192.168.10.1
Pinging 192.168.10.1 with 32 bytes of data:
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.10.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms


PC1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.1
Pinging 192.168.10.1 with 32 bytes of data:
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.10.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms


PC2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.1
Pinging 192.168.10.1 with 32 bytes of data:
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.10.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms


Cisco Packet Tracer - C:\Users\Admin\Desktop\Tops Assignment\N+ - Network Fundamentals and building networks\HomeWiFiNetwork.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
0/1
0/2
0/3
Fa0
PC-PT PC0
PC-PT PC1
PC-PT PC2
Time: 00:12:42
Realtime
Simulation
Search for device
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete