1. **Take one topology containing 3 different LANs and 5 routers. Assume LAN 1 and LAN 3 contains 2 systems and LAN 2 contains 3 systems. Connect these 3 LANs using 5 routers as per your understanding.**
    a. **Give IP addresses to all systems and routers (keep in mind all rules for that explaimed in the video).**
    b. **Show device configuration (ip address, mask and gateway address) of atleast one system from every LAN.**
    c. **Give MAC addresses (Mnemonic name can be given i.e. M1, MR11, etc) .**
    d. **Decide Source device and Destination device and path from source to destination.**
    e. **Show the content of source mac dest mac, source port dest port, source ip dest ip for every hop in the path from source to destination.**
    f. **Explain hop to hop delivery, source to destination and end to end delivery .**

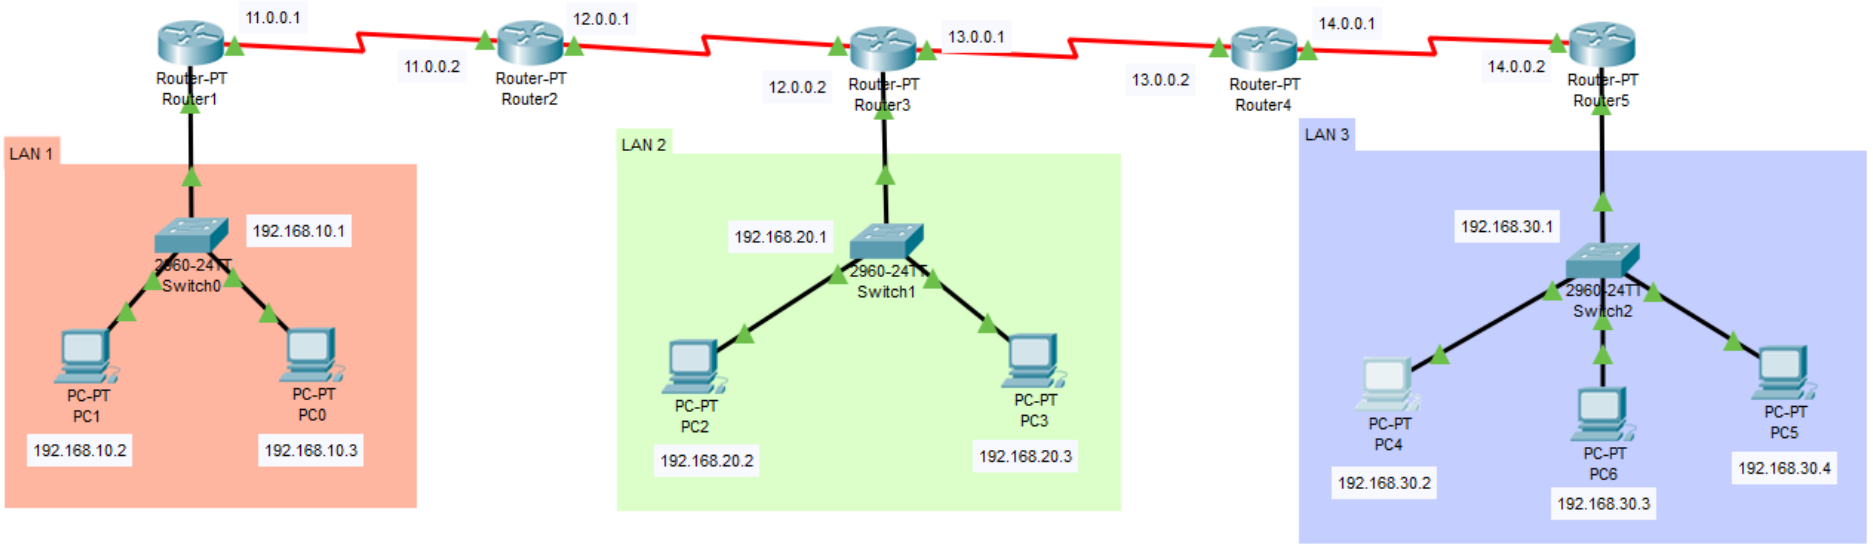
11.0.0.1
11.0.0.2
12.0.0.1
12.0.0.2
13.0.0.1
13.0.0.2
14.0.0.1
14.0.0.2
Router-PT
Router1
Router-PT
Router2
Router-PT
Router3
Router-PT
Router4
Router-PT
Router5
LAN 1
192.168.10.1
2960-24TT
Switch0
PC-PT
PC1
192.168.10.2
PC-PT
PC0
192.168.10.3
LAN 2
192.168.20.1
2960-24TT
Switch1
PC-PT
PC2
192.168.20.2
PC-PT
PC3
192.168.20.3
LAN 3
192.168.30.1
2960-24TT
Switch2
PC-PT
PC4
192.168.30.2
PC-PT
PC6
192.168.30.3
PC-PT
PC5
192.168.30.4

A] Give IP addresses to all systems and routers

Device Configurations

SR NO.	NAME	IP ADDRESS	SUBNET MASK	DEFAULT GATEWAY	MAC ADDRESS
			LAN1		
1	PC0	192.168.10.3	255.255.255.0	192.168.10.1	0030.A3EE.18C2
2	PC1	192.168.10.2	255.255.255.0	192.168.10.1	0001.4213.D230
			LAN2		
3	PC2	192.168.20.2	255.255.255.0	192.168.20.1	0001.63CA.D49D
4	PC3	192.168.20.3	255.255.255.0	192.168.20.1	0060.3E4B.E903
			LAN3		
5	PC4	192.168.30.2	255.255.255.0	192.168.30.1	0005.5E32.C726
6	PC5	192.168.30.4	255.255.255.0	192.168.30.1	000D.BD6D.39D8
7	PC6	192.168.30.3	255.255.255.0	192.168.30.1	0060.7031.7EEE

ROUTER 1

SERIAL

SERIAL	IP ADDRESS	SUBNET MASK
Serial2/0	11.0.0.1	255.0.0.0

FAST ETHERNET0/0

IP ADDRESS	192.168.10.1
SUBNET MASK	255.255.255.0
MAC ADDRESS	0002.4A05.B624

STATIC ROUTING

SR NO	NETWORK	MASK	NEXT HOP
1	192.168.20.0	255.255.255.0	11.0.0.2
2	192.168.30.0	255.255.255.0	11.0.0.2
3	12.0.0.0	255.0.0.0	11.0.0.2

ROUTER 2

SERIAL

SERIAL	IP ADDRESS	SUBNET MASK
Serial2/0	11.0.0.2	255.0.0.0
Serial3/0	12.0.0.1	255.0.0.0

STATIC ROUTING

SR NO	NETWORK	MASK	NEXT HOP
1	192.168.20.0	255.255.255.0	12.0.0.2
2	192.168.10.0	255.255.255.0	11.0.0.1
3	192.168.30.0	255.255.255.0	12.0.0.2

ROUTER 3

SERIAL

SERIAL	IP ADDRESS	SUBNET MASK
Serial2/0	12.0.0.2	255.0.0.0
Serial3/0	13.0.0.1	255.0.0.0

FAST ETHERNET0/0

IP ADDRESS	192.168.20.1
SUBNET MASK	255.255.255.0
MAC ADDRESS	00E0.A3B7.29B9

STATIC ROUTING

SR NO	NETWORK	MASK	NEXT HOP
1	192.168.10.0	255.255.255.0	12.0.0.1
2	192.168.30.0	255.255.255.0	13.0.0.2

ROUTER 4

SERIAL

SERIAL	IP ADDRESS	SUBNET MASK
Serial2/0	13.0.0.2	255.0.0.0
Serial3/0	14.0.0.1	255.0.0.0

STATIC ROUTING

SR NO	NETWORK	MASK	NEXT HOP
1	192.168.30.0	255.255.255.0	14.0.0.2
2	192.168.20.0	255.255.255.0	13.0.0.1
3	192.168.10.0	255.255.255.0	13.0.0.1

ROUTER 5

SERIAL

SERIAL	IP ADDRESS	SUBNET MASK
Serial2/0	14.0.0.2	255.0.0.0

FAST ETHERNET0/0

IP ADDRESS	192.168.30.1
SUBNET MASK	255.255.255.0
MAC ADDRESS	00E0.F729.27B1

STATIC ROUTING

SR NO	NETWORK	MASK	NEXT HOP
1	192.168.20.0	255.255.255.0	14.0.0.1
2	192.168.10.0	255.255.255.0	14.0.0.1
3	13.0.0.0	255.0.0.0	14.0.0.1

B] Show device configuration (ip address, mask and gateway address) of at least one system from every LAN.

LAN1 [PC1]

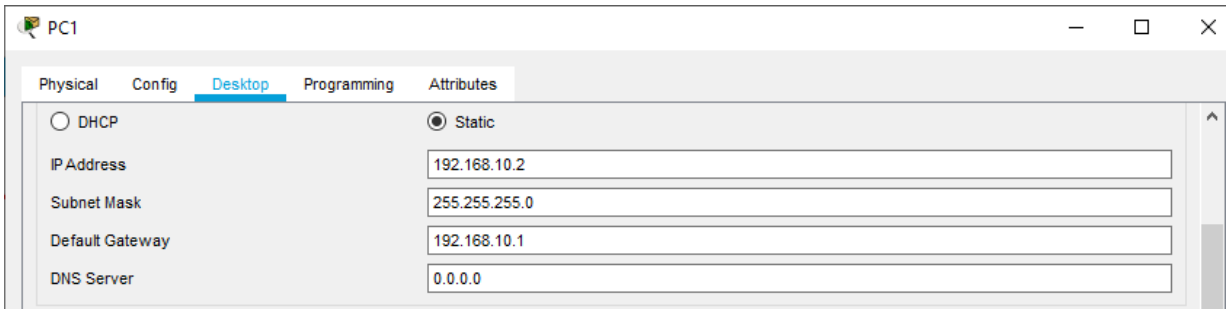

LAN2 [PC2]

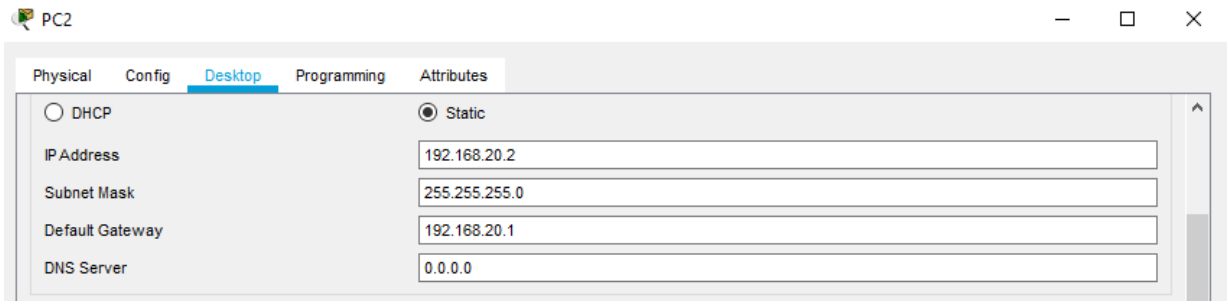

LAN3 [PC4]

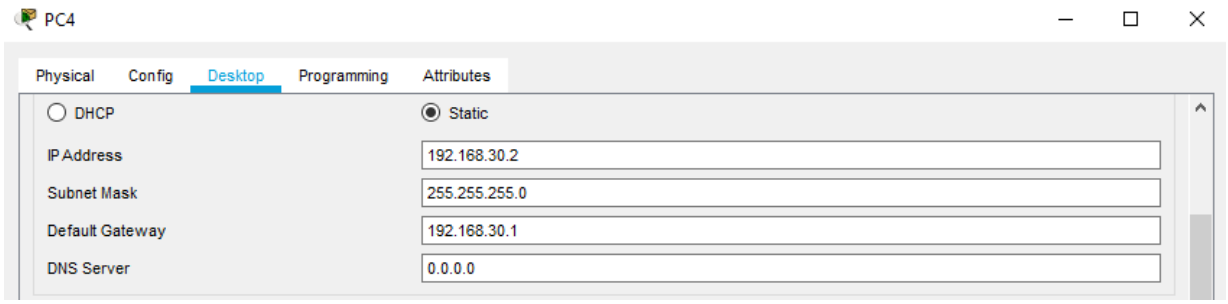

D] Decide Source device and Destination device and path from source to destination.

SOURCE : PC1
DESTINATION : PC5

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit
	In Progress	PC1	PC5	ICMP		0.000	N	0	(edi

PATH : PC1 -> Switch0 -> Router1 -> Router2 -> Router3 -> Router4 -> Router5 -> Switch2 -> PC5

Vis.	Time(sec)	Last Device	At Device	Type
	0.000	--	PC1	ICMP
	0.001	PC1	Switch0	ICMP
	0.002	Switch0	Router1	ICMP
	0.003	Router1	Router2	ICMP
	0.004	Router2	Router3	ICMP
	0.005	Router3	Router4	ICMP
	0.006	Router4	Router5	ICMP
	0.007	Router5	Switch2	ICMP
	0.008	Switch2	PC5	ICMP
	0.008	Switch2	PC6	ICMP
	0.008	Switch2	PC4	ICMP
	0.009	PC5	Switch2	ICMP
	0.010	Switch2	Router5	ICMP
	0.011	Router5	Router4	ICMP
	0.012	Router4	Router3	ICMP
	0.013	Router3	Router2	ICMP
	0.014	Router2	Router1	ICMP
	0.015	Router1	Switch0	ICMP
	0.016	Switch0	PC1	ICMP

E] Show the content of source mac dest mac, source port dest port, source ip dest ip for every hop in the path from source to destination.

ROUTER 1[Hop 1]

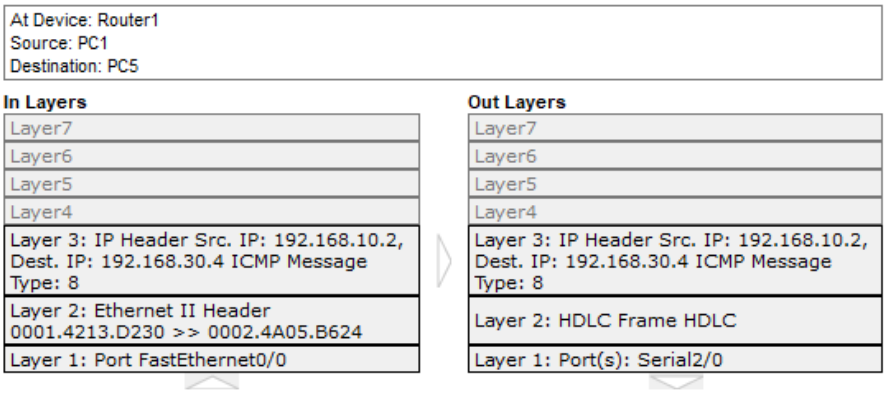

ROUTER 2 [Hop 2]

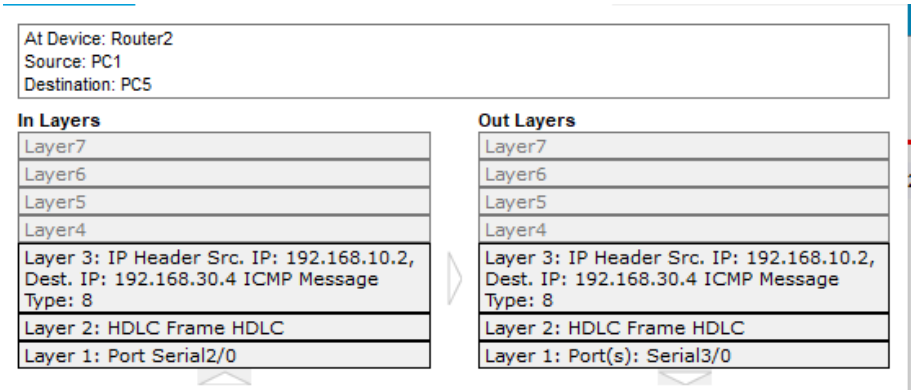

ROUTER 3 [Hop 3]

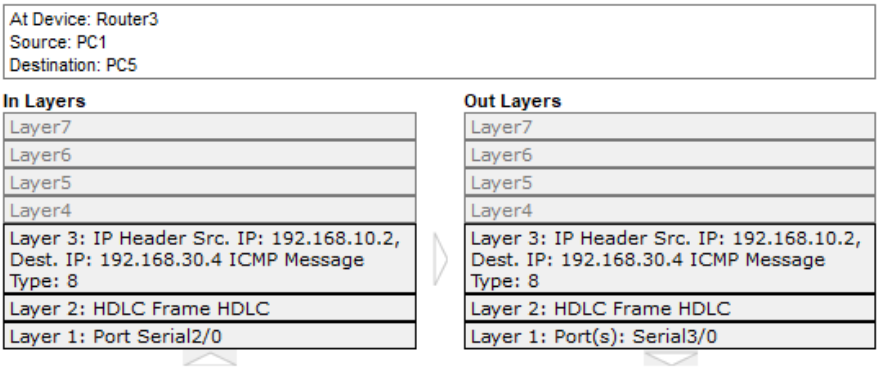

ROUTER 4 [Hop 4]

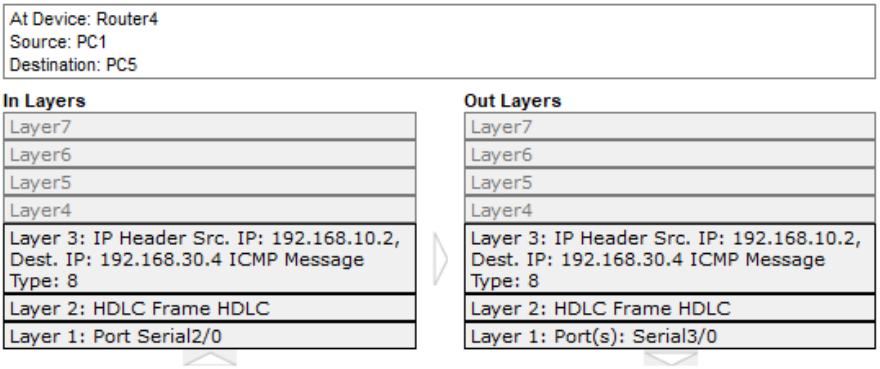

ROUTER 5 [Hop 5]

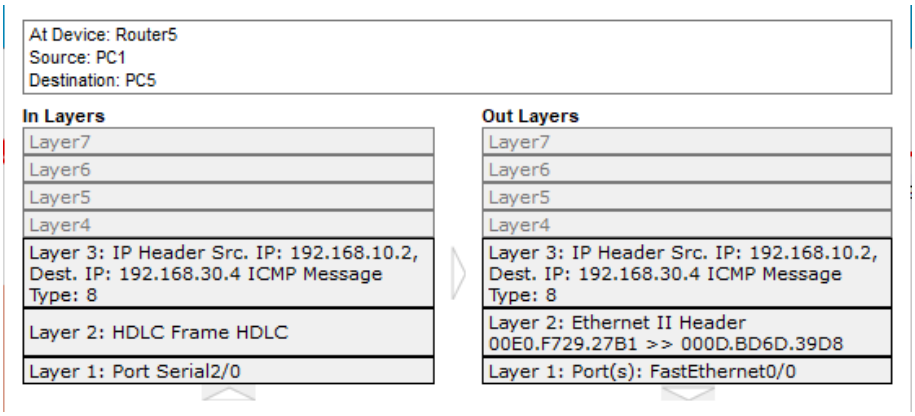

F] Explain hop to hop delivery, source to destination and end to end delivery.

Hop to Hop Delivery

Hop-to-hop Delivery involves not only the source and destination node, but rather some or all of the intermediate nodes as well, it allows data to be forwarded even if the path between source and destination is not permanently connected during communication.

Source to Destination Delivery

In Source to Destination Delivery Source and Destination Device are Communication Directly without any host or any other networking in between.

End to End Delivery

The end-to-end Delivery is a design framework in computer networking. In networks designed according to this principle, application-specific features reside in the communicating end nodes of the network, rather than in intermediary nodes, such as gateways and routers, that exist to establish the network.