



Honour Your Trust

FARMWORLD AGROTECH PVT. LTD.



DESCRIPTION:

Farmworld Disc Plough is designed to work in all types of soil condition. It functions such as soil breaking, soil raising, soil turning & soil mixing. It is manufactured according to international standards and can be mounted on any type of tractors.

Technical Specification

Model	FWDP02	FWDP03	FWDP04	FWDP05
Frame (mm)	Seamless Tubular Frame			
Disc Type	Boron Steel Disc			
Disc Size (mm)	660 x 6 (26"x 6mm)			
Disc Spacing (mm)	550			
Bearing Hubs	2	3	4	5
Scraper (mm)	6 (Adjustable)			
Coulter Disc (mm)	508 x 5			
Working Depth (mm)	250			
Working Width (mm)	600	900	1200	1600
Mounted CAT	CAT II			
Weight (kg)	310	420	530	630
HP Requirement	45-55	55-65	65-75	75-95



DESCRIPTION:

Farmworld Offset Disc Harrow is used as a secondary tillage implement after plowing. It is ideal for lump breaking, disposal of seedlings, shredding stubbles, shrubs and mixing it with soil. It is very easy to use, which can meet the needs of a farmer in other soil operations. Its work speed is higher than other tillage implements, operation cost is lower, and it is more economical.

Technical Specification

Model	FWMODH12	FWMODH14	FWMODH16	FWMODH18	FWMODH20	FWMODH22	FWMODH24
Frame (mm)	75 x 10 (angle frame) / 100 x 50 (channel frame)						
Axle (mm)	28 (Solid Sq. Rod)						
Disc Type	Boron Steel Disc (Notched in Front & Plain in Rear gang)						
Disc Size (mm)	610 x 6						
Disc Spacing (mm)	230						
Bearing Hubs	4		6			8	
Working Depth (mm)	250						
Working Width (mm)	1420	1630	1850	2060	2280	2500	2700
Mounted CAT	CAT II						
Weight (kg)	400	440	510	590	620	680	740
HP Requirement	35-55		55-75			75-95	



DESCRIPTION:

Farmworld Sub Soiler is used as a primary Tillage suitable for deep tillage and to break hard pan of the soil. It works best in medium and hard type of soil. It loosen the soil for better drainage.

Technical Specification

Model	FWSS01	FWSS02	FWSS03
Length (mm)	510	550	830
Width (mm)	660	1220	1520
Height (mm)	1060-1370		
Tillage Width (mm)	70	700-960	1055-1284
Tyne to Tyne Distance (mm)	N/A	600-863	465-576
Tyne (mm)	150X35		
No. of Tyne	01	02	03
Mounted CAT	CAT II		
Working Depth (mm)	550		
Weight (kg)	70	200	300
HP Requirement	40-55	60-80	90-110



Honour Your Trust

SEED CUM FERTILIZER DRILL (MULTICROP)



DESCRIPTION:

Farmworld Seed cum Fertilizer Drill is highly efficient seed planting implement used for sowing wide variety of seeds. This machine enables us to sow directly after harvesting without prior seed bed preparation which saves seeds, tractor working hour & labour.

Technical Specification

Model	FWSCFD 09	FWSCFD 11	FWSCFD 13
Frame (mm)	60 x 60 x 5 Tubular Frame		
Tines (mm)	20 (forged) Zero Till / Profile		
Seed box (mm)	MS Galvanize		
Seed & Fertilizer Box Capacity (Kg)	70		
Seed Drilling Depth (mm)	20-100 (Adjustable)		
Plant to Plant Spacing (mm)	25-250 (Adjustable)		
Row to Row Spacing (mm)	100-2000 (Adjustable)		
Working Width (mm)	2000		
Mounted CAT	CAT I		
Weight (kg)	310	350	390
HP Requirement	35-60		



DESCRIPTION:

Farmworld Tractor Operated automatic Potato Planter is efficient, faster and more cost effective for small as well as big farms and can be operated by single man. It has agitator to remove seed blockages and prevent double seeding through conveyor vibration mechanism. It ensures uniform growth, maturity and better yield and feasible for various soil types.

Technical Specification


Model	FWPP02	FWPP04
No. of Furrow Opener	2	4
No. of Ridge Maker	3	3
Row to Row distance (mm)	600-660	
Working depth (mm)	130-150	
Working width (mm)	1320	2640
No. of cups	2x34	4x34
Size of Potato Seeds	30 – 75 (cut or uncut)	
Hopper Capacity (kg)	240	420
Fertilizer box Capacity (kg)	80	120
Planting Capacity	1.25 – 2.5 acre/hrs.	
Plant to Plant distance (mm)	100-125-150-175-200-225-250-300	
Powered by	Wheels	
Weight (kg)	580 (Unladen)	880 (Unladen)
HP Requirement	60 HP+	70 HP+



DESCRIPTION:

Farmworld Tractor Operated Potato Harvester/Digger is efficient, faster and more cost effective for small as well as big farms and can be operated by single man. It harvest the potatoes very finely and forms equal level soil bed, potatoes harvested are very much clear and without cuts. It finish mining, soil and potato separation in one time and can harvest potato with the potato stems. Farmworld potato harvester is multifunctional machine and can used for harvesting variety of root crops and vegetables.

Technical Specification	Model	FWPH02
	No. of Rows	2
	Working depth (mm)	130-200
	Working width (mm)	1320
	Powered by	Gear Drive
	Cage type	Belt / SS Chain
	Harvesting Capacity	1 acre/hour
	Total Length (mm)	2200
	Total Width (mm)	1400
	Total Height (mm)	1150
	Bed Preparation	Roller for Bed Preparation
	Weight (kg)	590
	HP Requirement	60 HP+

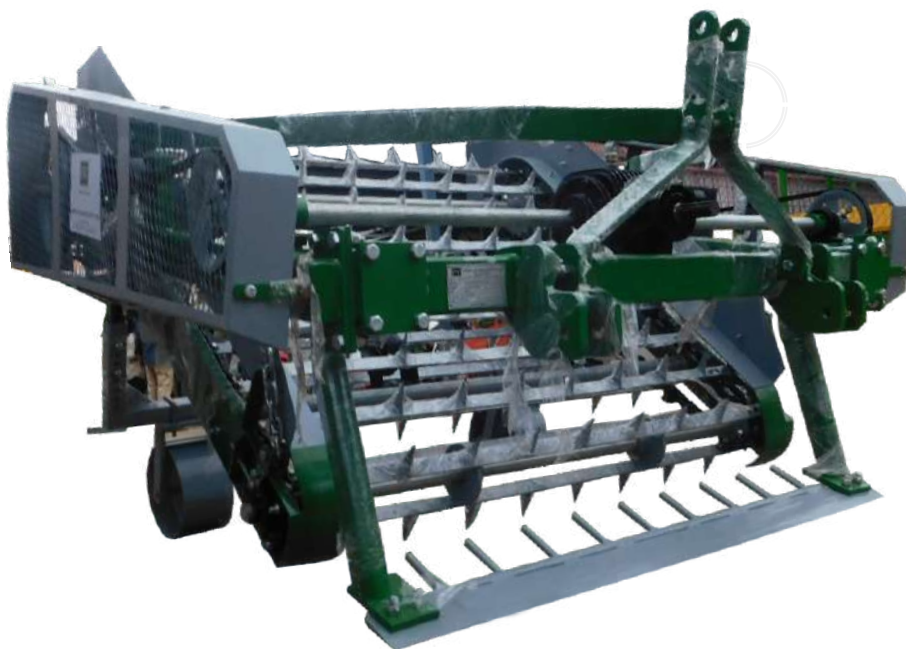

DESCRIPTION:

Tractor Operated Groundnut Digger dig out and uproot the groundnut plant from soil with the help of harvesting blade. The uprooted groundnut pods are then lifted by an elevator conveyor belt which vibrates the groundnut to separate it from attached soil and left behind windrow of vines with pods to dry up in one operation and complete Groundnut Harvesting Process with No Loss of Seeds.

Technical Specification	Model	FWGD
	Dimension (Inch)	60 x 100 x 55
	Frame	Welded, Tubular Steel Frame
	Capacity	3 Acre/Hour Or 4.8 Km/Hour
	Gear Box	Heavy Duty - 540 RPM Standard (1000 RPM Optional)
	Drive	Dual V Belt with Adjuster Idler, Chain Drive 20 - bar rattler bar Assembly
	Windrowing attachment	Adjustable for Crop Condition, Designed for Clog-Free Operation
	Working Depth	Adjustable with depth control wheels
	Cutting Width (Inch)	48/54/58/64/68/75
	Hitch Category	CAT II
	Weight	520 Kg
	HP Requirement	45 HP+



Honour Your Trust

GROUNDNUT THRESHER



DESCRIPTION:

Farmworld Tractor Operated Groundnut Thresher separates groundnut leaves, branches, soil/mud from the groundnut plants in threshing chamber and expelled clean groundnut at the other end of the thresher. The impurities falls onto the sieve, where the dried leaves and light material are removed by air from the blower. The clean groundnut pods than fall through the sieve and are discharged through the Outlet Tray for collection.

Technical Specification

Model	FWGT
Structure	Angle Frame, Channel Frame, Glv Metal Sheet, M.S Plate, Square Pipe, Screw Jack
Feeding System	Manual Feeding (safety requirement as per IS 9129)
Power Transmission	V-belt pully – bearing shaft (50 mm)
Length (Inch)	120
Width (Inch)	48
Height (Inch)	94
Capacity	1 acre/hour
Transport wheels	6.00-16 x 2 wheels
Total weight	1350 kg



Honour Your Trust

GROUNDNUT DECORTICATOR



DESCRIPTION:

Farmworld Groundnut Decorticator is easy to operate with low maintenance and useful for shelling groundnut from its shell and separate broken seeds as well.

Technical Specification

Model	FWGNDT
Structure	L type angle Frame, Strip, Flat Glv Metal Sheet, M.S Plate, Square Pipe
Feeding System	Manual Feeding (safety requirement as per IS 9129)
Power Transmission	V-belt pully – bearing shaft (50 mm)
Length (Inch)	81
Width (Inch)	30
Height (Inch)	59
Motor	2 Hp Heavy Duty Motor
Capacity	300 Kg/hour
Total weight	280 kg



Honour Your Trust

TRACTOR OPERATED REAPER



DESCRIPTION:

Farmworld Tractor Operated Front Reaper is suitable to harvest all major Crops. It can be attached with any tractor for clean & smooth harvesting and keeps the crop in a straight line on the right hand side for easy collection.

Technical Specification

Model	FWFR3	FWFR4
Operation / Belt	Front / 03	Front / 04
Dimension (mm)	2360 x 990 x 710	2360 x 990 x 1450
Crop Cutting Height (mm)	1220	1820
Conveyor Belt	3	4
Conveyor Belt Size (mm)	4572 x 65 - 3 Ply	
Lugs on Belt	35	
Ground Cutting Height (mm)	40 - 60 (Adjustable)	
Gear Box	Heavy Duty	
Star Wheel	Nylon Fibre - 7 Unit	
Hydraulic Jack (mm)	JCB Type - 304 x 65	
Blade	27	
Blade Thickness (mm)	3	
Finger	Spot Type - 14 Unit	
Capacity (Acre/Day)	12-14	
Weight (kg)	300	370
Tractor (hp)	45-55	55-65



DESCRIPTION:

Farmworld Self-Propelled walk behind Reaper is suitable for harvesting crops like wheat, paddy, barley, millet, sorghum, oats, sesame, soybean, Maize, fodder etc. The harvested crop is conveyed to one side of the machine by the conveyor belt and windrowed in the field. It is specially designed to work efficiently in plains, mountains, hilly areas, uplands & sloping fields.

Technical Specification	Model	FWDR04	FWGR04
	Engine Type	Diesel Engine	Gasoline Engine
	Engine Brand	Greaves	GX200 Honda
	Engine HP	5	
	Cutting Height (mm)	50 (From Ground Level)	
	Cutting Width (mm)	1220	
	Max. Crop Height (mm)	1820	
	Conveyer Belt	02 Belt	
	Capacity	0.5 acres/hour	
	Fuel Consumption	700 ml/hour	
	Speed	05 km/hour	
	Weight (kg)	210	160



DESCRIPTION:

Farmworld Chaff Cutter is a mechanical Equipment built to process straw or hay into small pieces before being mixed together with other forage, animal feed or light organic material. This aids the animal's digestion and prevents animals from rejecting any part for their food.

Technical Specification

Model	FWCC1000	FWCC500
Blade Speed (RPM)	480	
No. of Fixed Blade	01	
No. of Moveable Blade	02	
Blade Material	High Carbon Steel	
Capacity (Kg/Hour)	1000	500
Colour	Powder Coating	
Operation	Electric Motor Operated 02 HP (Single Phase)	
Total weight (Kg)	130	80

ACCREDITATION



STRONG POWER



FUEL-EFFICIENT



LONG LIFE



QUALITY STANDARD



QUALITY SPARES



365 DAY SERVICE



Honour Your Trust

AUTHORIZED DEALER

■ OFFICE / FACTORY ADDRESS

Plot No. 373, Road-U, Khirasara Industrial Estate,
Khirsara, Taluka - Lodhika, Rajkot - 360 021,
(Gujarat) India.

✉ info@farmworld.in
✉ export@farmworld.in

🌐 www.farmworld.in

☎ +91 88088 05205
☎ +91 99788 05205