
3. Develop a flowchart in Figma depicting the operation of a Network Switching Subsystem in a mobile cellular system.

AIM:-

To develop a flowchart in Figma depicting the operation of the Network Switching Subsystem (NSS) in a mobile cellular system.

Algorithm:-

1. Start the process.
2. The Mobile Station (MS) initiates a call.
3. The Base Transceiver Station (BTS) receives the radio signal.
4. The Base Station Controller (BSC) manages radio resources.
5. The Mobile Switching Centre (MSC) receives the call request.
6. Authenticate the subscriber using HLR, VLR, and AuC.
7. If the subscriber is authorized, route the call to the destination through another MSC or PSTN.
8. Establish the call and allow communication.
9. When the call ends, release the allocated resources.
10. If the subscriber is not authorized, reject the call request.
11. Stop the process.

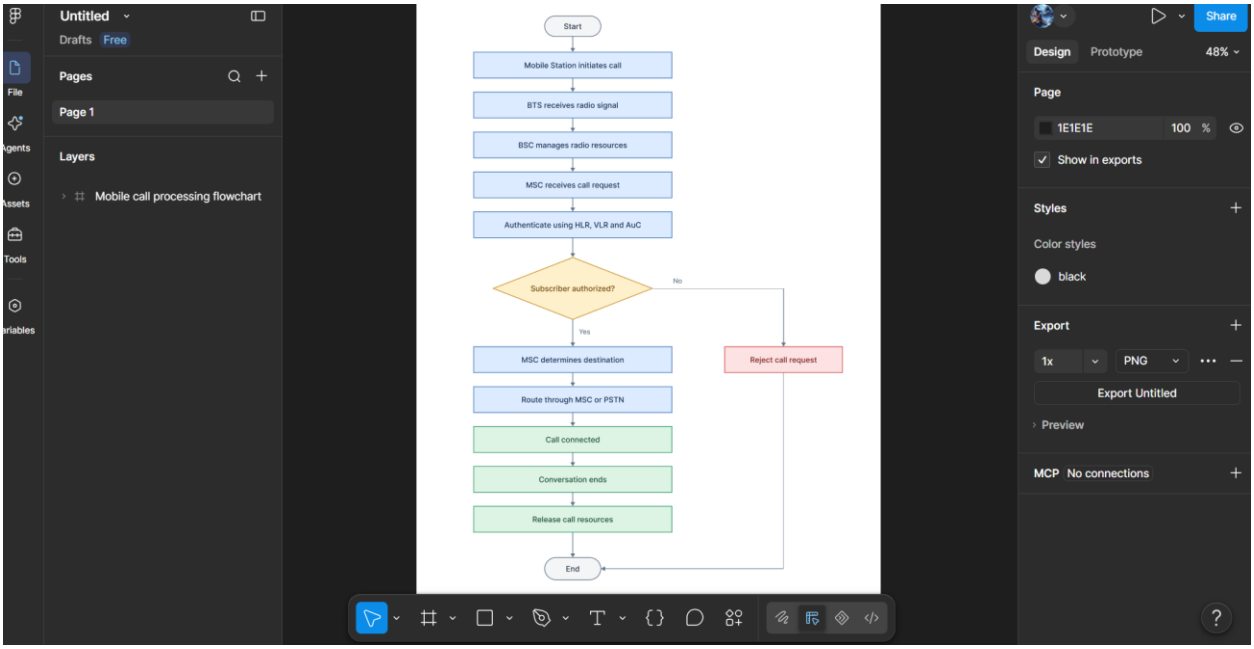

Result:-

The flowchart representing the operation of the Network Switching Subsystem (NSS) in a mobile cellular system was successfully developed in Figma.