


Exp No: 8

GAS SENSOR MQ-2 IN PROTEUS USING ARDUINO

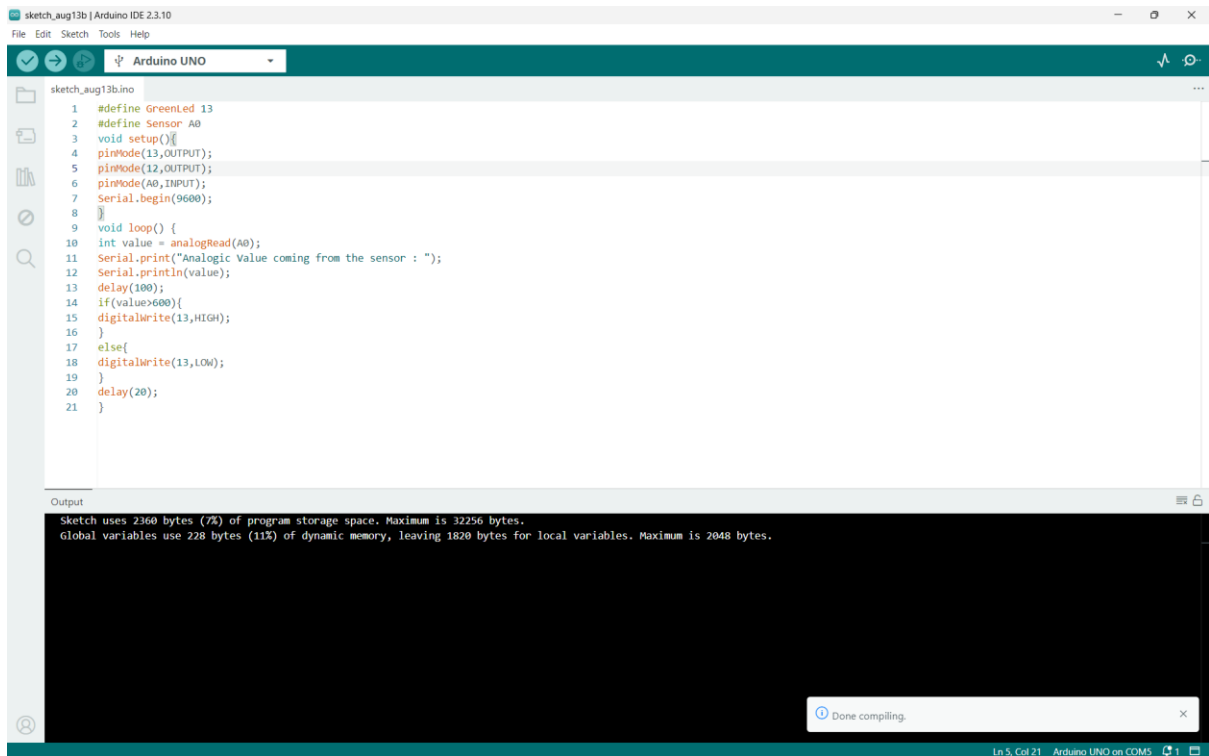


```
sketch_aug13b.ino
1 #define GreenLed 13
2 #define Sensor A0
3 void setup() {
4   pinMode(13, OUTPUT);
5   pinMode(12, OUTPUT);
6   pinMode(A0, INPUT);
7   Serial.begin(9600);
8 }
9 void loop() {
10  int value = analogRead(A0);
11  Serial.print("Analogic Value coming from the sensor : ");
12  Serial.println(value);
13  delay(100);
14  if(value > 600) {
15    digitalWrite(13, HIGH);
16  }
17  else {
18    digitalWrite(13, LOW);
19  }
20  delay(20);
21 }
```

Output

Sketch uses 2360 bytes (7%) of program storage space. Maximum is 32256 bytes.
Global variables use 228 bytes (11%) of dynamic memory, leaving 1820 bytes for local variables. Maximum is 2048 bytes.

Done compiling.

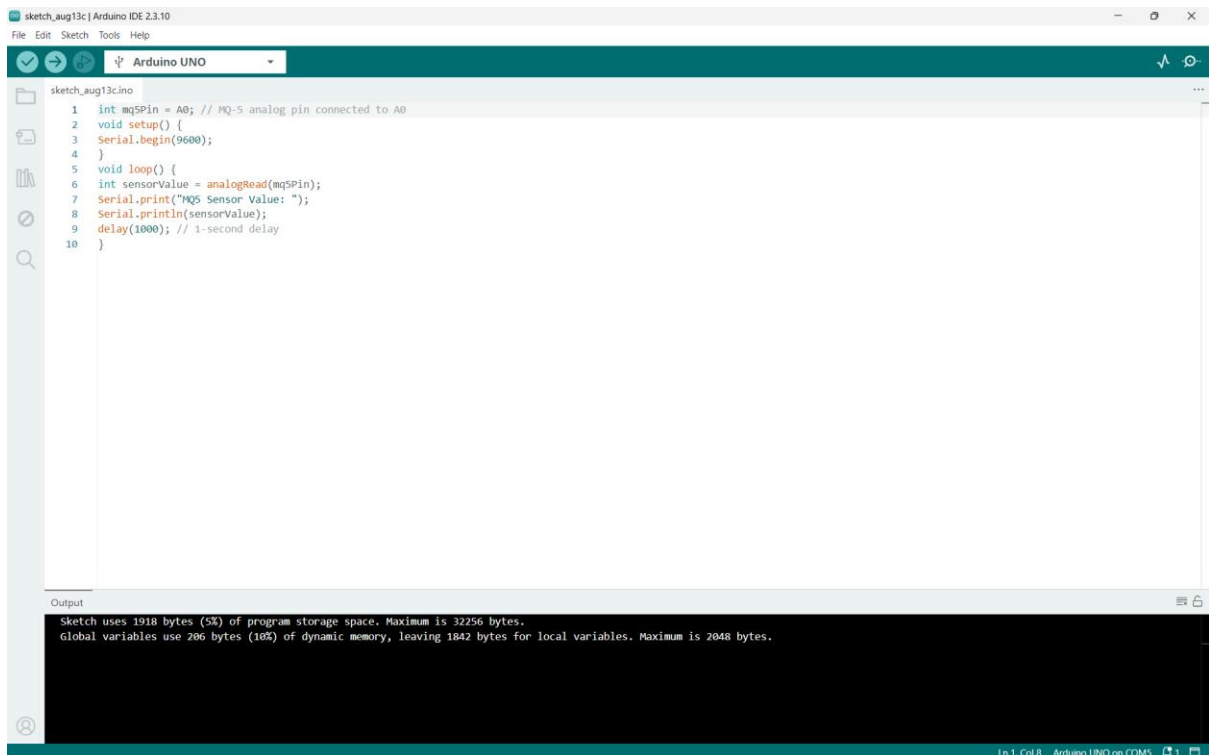

```
sketch_aug13c.ino
1 int mq5Pin = A0; // MQ-5 analog pin connected to A0
2 void setup() {
3   Serial.begin(9600);
4 }
5 void loop() {
6   int sensorValue = analogRead(mq5Pin);
7   Serial.print("MQ5 Sensor Value: ");
8   Serial.println(sensorValue);
9   delay(1000); // 1-second delay
10 }
```

Output

Sketch uses 1918 bytes (5%) of program storage space. Maximum is 32256 bytes.
Global variables use 206 bytes (10%) of dynamic memory, leaving 1842 bytes for local variables. Maximum is 2048 bytes.

