



#TheWiseChoice

Continued Energy Solutions

Everyday, A Little Further



Forever Forward.

For India, Its People and What Comes Next

ENERGY TRANSITION COMPANY

Purpose-built to move India and its people permanently forward.

We operate at the intersection of where energy access meets everyday life: last mile e-mobility that puts livelihoods in motion, Residential Solar with Storage that brings energy independence to homes and businesses and advanced electronics manufacturing that builds the technological backbone of a cleaner economy.





₹5601 Cr.*
FY25-26 Turnover



CAGR 29.6%
Last 4 Fiscal Years



Over **4100+**
Employees



1900+
Distributors

What's Inside

1.	About Eastman	2-3
2.	Home UPS (SINO) - Sine Wave	5-8
3.	Home UPS (ELECTRO) - Square Wave	9-10
4.	Home UPS (OMEGA) - Sine Wave	11-12
5.	Home UPS (SIGMA) - Square Wave	13-14
6.	Home UPS (SinoSpark) - Sine Wave	15-16
7.	Home UPS (WATTRIX) - Square Wave	17-18
8.	Conventional Tubular Batteries - Regular Series	19-20
9.	Conventional Tubular Batteries - Smart Series	21-22
10.	Conventional Tubular Batteries - CitiMax Series	23-24
11.	LithTec Combo (Home UPS + Lithium Battery)	25-29
12.	Eastman iConnect App	30
13.	Eastman Assure Service	31

Home UPS

SINO - SINE WAVE



Models: 900VA to 15000VA



Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

SINO - SINE WAVE



Experience uninterrupted and intelligent power backup with the Eastman Sine Wave Inverter range, engineered with advanced Unity Power Factor technology for maximum efficiency and reliable performance. Designed to deliver pure sine wave output for the safety of sensitive appliances, these inverters effortlessly run LED TVs, refrigerators, laptops, Wi-Fi routers, air coolers, and other modern home essentials.

Available from 900VA to 15000VA capacities, the range features Zero-Volt Pickup, Peak Load Peak Output (PLPO), superior full-load performance at nominal battery voltage, and smooth operation for compressor and motor-based appliances. Backed by a 60-months warranty, Eastman Sine Wave Inverters combine powerful performance, energy efficiency, and long-lasting durability for modern Indian homes and businesses.



Reliability

Life. Uninterrupted.

Pure Sine Wave Output with Noiseless Operation

Protects appliances from damage and ensures smooth operation without humming noise or performance issues.

Zero Volt Pickup — Works even after Deep Discharge

Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.

In-a-wink Static Changeover — Instant & Silent Switching

Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.

Total Cost of Ownership

A Lifetime of Value

VA = Watt: Providing Full Rated Power

What's promised is what's delivered — full power, every single day, no hidden cuts.

Battery High Protection

Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.

State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)

Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/ noiseless operation.

Technical Specification

PARAMETER	SINO 900VA-12V	SINO 1050VA-12V	SINO 1200VA-12V
Mains AC Input Range (Wide Mode)	90V-300V ± 10V		
Mains AC Input Range (Narrow mode)	180V-260V±10V		
Output Voltage on Mains Mode	Same as Input		
Output Voltage on UPS Mode	210V+10%, -15%		
Output Frequency in UPS Mode	50Hz ± 0.1Hz		
Switching From Mains to UPS and UPS to Mains Mode	Automatic		
Output Waveform on Mains Mode	Same as Input		
Output Waveform On UPS Mode	Pure Sine Wave		
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah		
Charger	CCCV		
UPS Overload/UPS Short Circuit	110% / 300%		
UPS Transfer Time	15msec		
Technology	Microcontroller-based design		
Auto Reset Feature	yes		
Operating Temperature	0°C to +45°C		

*T&C Apply

Note: As part of regular product updates, specifications may be revised without prior notification.

Technical Specification

PARAMETER	SINO 1800VA-24V	SINO 2200VA-24V	SINO 2500VA-24V
Mains AC Input Range (Wide Mode)	90V-300V ± 10V		120V-275V ± 10V
Mains AC Input Range (Narrow mode)	180V-260V±10V		180V-260V±10V
Output Voltage on Mains Mode	Same as Input		Same as Input
Output Voltage on UPS Mode	210V+10%, -15%		220V ± 15%
Output Frequency in UPS Mode	50Hz ± 0.1Hz		50Hz ± 0.2Hz
Switching From Mains to UPS and UPS to Mains Mode	Automatic		
Output Waveform on Mains Mode	Same as Input		
Output Waveform On UPS Mode	Pure Sine Wave		
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah		
Charger	CCCV		Boost Based PWM Control Multi-Stage Technology with GPM
UPS Overload/UPS Short Circuit	110% / 300%		
UPS Transfer Time	15msec		
Technology	Microcontroller-based design		
Auto Reset Feature	yes		
Operating Temperature	0°C to +45°C		

Note: As part of regular product updates, specifications may be revised without prior notification.

Technical Specification

PARAMETER	SINO 4000VA-48V	SINO 5000VA-48V	SINO 5500VA-48V
Mains AC Input Range (Wide Mode)	120V-275V ± 10V		
Mains AC Input Range (Narrow mode)	180V-260V±10V		
Output Voltage on Mains Mode	Same as Input		
Output Voltage on UPS Mode	220V ± 15%		
Output Frequency in UPS Mode	50Hz ± 0.2Hz		
Switching From Mains to UPS and UPS to Mains Mode	Automatic		
Output Waveform on Mains Mode	Same as Input		
Output Waveform On UPS Mode	Pure Sine Wave		
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah		
Charger	Boost Based PWM Control Multi-Stage Technology with GPM		
UPS Overload/UPS Short Circuit	110% / 300%		
UPS Transfer Time	15msec		
Technology	Microcontroller-based design		
Auto Reset Feature	yes		
Operating Temperature	0°C to +45°C		

Note: As part of regular product updates, specifications may be revised without prior notification.

*T&C Apply


Technical Specification

PARAMETER	SINO 7500VA-96V	SINO 10000VA-120V	SINO 15000VA-180V
Mains AC Input Range (Wide Mode)	120V-295V ± 10V		
Mains AC Input Range (Narrow mode)	180V-265V±10V		
Output Voltage on Mains Mode	Same as Input		
Output Voltage on UPS Mode	220V ± 15%		
Output Frequency in UPS Mode	50Hz ± 0.2Hz		
Switching From Mains to UPS and UPS to Mains Mode	Automatic		
Output Waveform on Mains Mode	Same as Input		
Output Waveform On UPS Mode	Pure Sine Wave		
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah		
Charger	CC - CV		
UPS Overload/UPS Short Circuit	110% / 300%		
UPS Transfer Time	15msec		
Technology	Microcontroller-based design		
Auto Reset Feature	yes		
Operating Temperature	0°C to +45°C		

Note: As part of regular product updates, specifications may be revised without prior notification.

Home UPS

ELECTRO - SQUARE WAVE

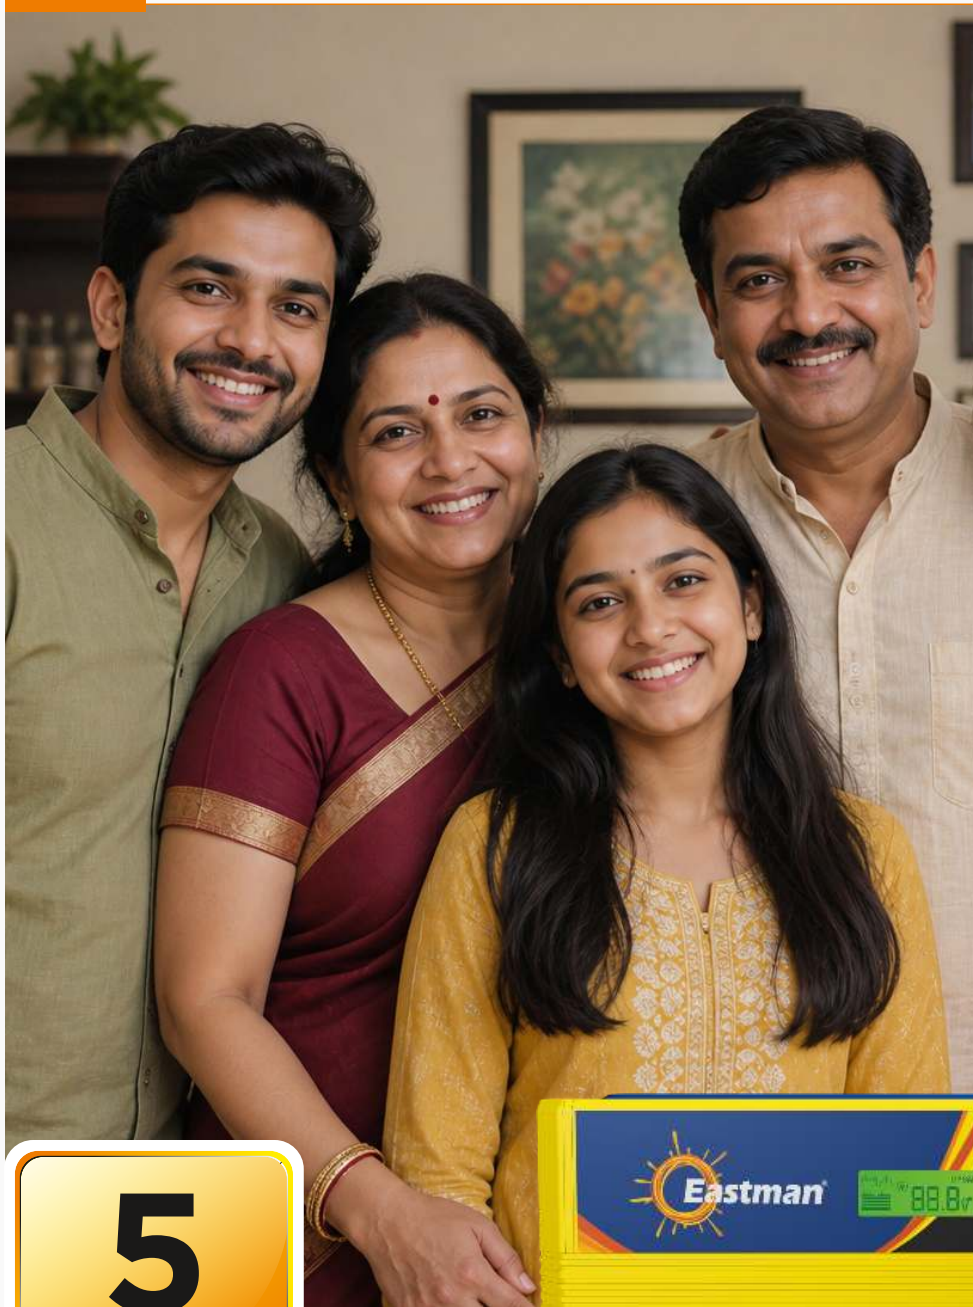

Models: 700VA to 2000VA

*T&C Apply



Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

ELECTRO - SQUARE WAVE



Experience reliable power backup with the Eastman Square Wave Inverter Range, powered by advanced Unity Power Factor technology for high efficiency and dependable performance.

Available from 700VA to 2000VA capacities, these inverters smoothly run TVs, refrigerators, laptops, Wi-Fi routers, air coolers, and other essential appliances. Key features include Zero-Volt Pickup, Peak Load Peak Output (PLPO), superior full-load performance, and efficient support for motor and compressor-based loads.

Backed by a 60-month warranty, Eastman delivers powerful, efficient, and durable backup solutions for modern homes and businesses.



Reliability

Life. Uninterrupted.

Peak Load Peak Output

Handles higher load comfortably even when multiple appliances start together - without tripping, shutting down, or missing a beat.

Zero Volt Pickup — Works even after Deep Discharge

Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.

In-a-wink Static Changeover — Instant & Silent Switching

Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.

Total Cost of Ownership

A Lifetime of Value

VA = Watt: Providing Full Rated Power

What's promised is what's delivered — full power, every single day, no hidden cuts.

Battery High Protection

Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.

State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)

Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/noiseless operation.

Technical Specification

PARAMETER	ELECTRO 700VA-12V	ELECTRO 900VA-12V	ELECTRO 1100VA-12V	ELECTRO 1400VA-12V	ELECTRO 1800VA-24V	ELECTRO 2000VA-24V
Mains AC Input Range (Wide Mode)	90V-300V ± 10V					
Mains AC Input Range (Narrow mode)	180V-260V ± 10V					
Output Voltage on Mains Mode	Same as Input					
Output Voltage on UPS Mode	210V-220V ± 10%					
Output Frequency in UPS Mode	50Hz ± 0.1Hz					
Switching From Mains to UPS and UPS to Mains Mode	Automatic					
Output Waveform on Mains Mode	Same as Input					
Output Waveform On UPS Mode	TPZi Wave					
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah					
Charger	CCCV					
UPS Overload/UPS Short Circuit	110% / 300%					
UPS Transfer Time	15msec					
Technology	Microcontroller-based design					
Auto Reset Feature	yes					
Operating Temperature	0°C to +45°C					

*T&C Apply

Note: As part of regular product updates, specifications may be revised without prior notification.

Home UPS

OMEGA - SINE WAVE



Models: 1000VA to 2000VA

*T&C Apply



Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

OMEGA - SINE WAVE



Designed to meet the everyday power needs of modern homes, this Home UPS range offers reliable and efficient backup performance with Sine Wave models available from 1000VA to 2000VA capacities. Engineered for smooth operation, faster charging, and enhanced protection, these UPS systems ensure uninterrupted comfort during power cuts.

Backed by a 48-month warranty*, the range delivers dependable performance, long-lasting durability, and complete peace of mind for your home.



Reliability

Life. Uninterrupted.



Pure Sine Wave Output with Noiseless Operation

Protects appliances from damage and ensures smooth operation without humming noise or performance issues.



Zero Volt Pickup — Works even after Deep Discharge

Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.



In-a-wink Static Changeover — Instant & Silent Switching

Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.



Total Cost of Ownership

A Lifetime of Value



Wide AC Voltage Range + Lightning Protection

Stable operation in real Indian conditions, reducing chances of breakdowns or damage during voltage fluctuations.



Battery High Protection

Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.



State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)

Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/ noiseless operation.

Technical Specification

PARAMETER	OMEGA 1000VA-12V	OMEGA 1200VA-12V	OMEGA 1500VA-12V	OMEGA 2000VA-24V
Mains AC Input Range (Wide Mode)	90V-300V±10V			
Mains AC Input Range (Narrow mode)	180V-260V±10V			
Output Voltage on Mains Mode	Same as Input			
Output Voltage on UPS Mode	210V+10%, -15%			
Output Frequency in UPS Mode	50Hz ± 0.1Hz			
Switching From Mains to UPS and UPS to Mains Mode	Automatic			
Output Waveform on Mains Mode	Same as Input			
Output Waveform On UPS Mode	Pure Sine Wave			
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah			
Charger	CCCV			
UPS Overload/UPS Short Circuit	110% / 300%			
UPS Transfer Time	≤15msec			
Technology	Microcontroller-based design			
Auto Reset Feature	yes			
Operating Temperature	0°C to +45°C			

Note: As part of regular product updates, specifications may be revised without prior notification.

Home UPS

SIGMA - SQUARE WAVE



Model: 700VA to 2000VA

*T&C Apply



Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

SIGMA - SQUARE WAVE



Designed to meet the everyday power needs of modern homes, this Home UPS range offers reliable and efficient backup performance with Square Wave models available from 700VA to 2000VA capacities. Engineered for smooth operation, faster charging, and enhanced protection, these UPS systems ensure uninterrupted comfort during power cuts.

Backed by a 48-month warranty*, the range delivers dependable performance, long-lasting durability, and complete peace of mind for your home.



Reliability

Life. Uninterrupted.



Peak Load Peak Output
Handles higher load comfortably even when multiple appliances start together - without tripping, shutting down, or missing a beat.



Zero Volt Pickup — Works even after Deep Discharge
Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.



In-a-wink Static Changeover — Instant & Silent Switching
Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.



Total Cost of Ownership

A Lifetime of Value



Wide AC Voltage Range + Lightning Protection
Stable operation in real Indian conditions, reducing chances of breakdowns or damage during voltage fluctuations.



Battery High Protection
Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.



State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)
Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/ noiseless operation.

Technical Specification

PARAMETER	SIGMA 700VA-12V	SIGMA 850VA-12V	SIGMA 1000VA-12V	SIGMA 1200VA-12V	SIGMA 1500VA-12V	SIGMA 2000VA-24V
Mains AC Input Range (Wide Mode)	90V-300V±10V					
Mains AC Input Range (Narrow mode)	180V-260V±10V					
Output Voltage on Mains Mode	Same as Input					
Output Voltage on UPS Mode	210V+10%, -15%					
Output Frequency in UPS Mode	50Hz ± 0.1Hz					
Switching From Mains to UPS and UPS to Mains Mode	Automatic					
Output Waveform on Mains Mode	Same as Input					
Output Waveform On UPS Mode	TPZi Wave					
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah					
Charger	CCCV					
UPS Overload/UPS Short Circuit	110% / 300%					
UPS Transfer Time	≤15msec					
Technology	Microcontroller-based design					
Auto Reset Feature	yes					
Operating Temperature	0°C to +45°C					

Note: As part of regular product updates, specifications may be revised without prior notification.

Home UPS

SINOSPARK - SINE WAVE



Models: 950VA to 2300VA

*T&C Apply



Powered By

Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.


Home UPS

SINOSPARK - SINE WAVE



Designed to meet the everyday power needs of modern homes, this Home UPS range offers reliable and efficient backup performance with Sine Wave models available range from 950VA to 2300VA capacities. Engineered for smooth operation, faster charging, and enhanced protection, these UPS systems ensure uninterrupted comfort during power cuts.

Backed by a 36-month warranty*, the range delivers dependable performance, long-lasting durability, and complete peace of mind for your home.

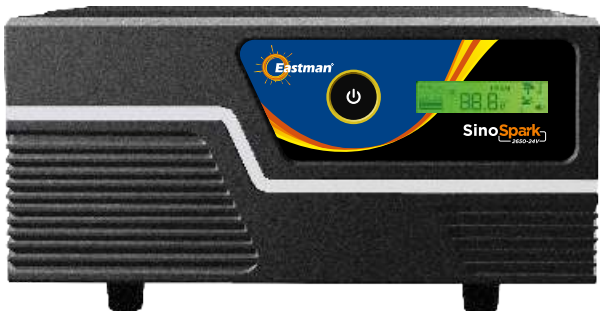

Reliability

Life. Uninterrupted.

Pure Sine Wave Output with Noiseless Operation

Protects appliances from damage and ensures smooth operation without humming noise or performance issues.

Zero Volt Pickup — Works even after Deep Discharge

Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.

In-a-wink Static Changeover — Instant & Silent Switching

Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.

Total Cost of Ownership

A Lifetime of Value

Wide AC Voltage Range + Lightning Protection

Stable operation in real Indian conditions, reducing chances of breakdowns or damage during voltage fluctuations.

Battery High Protection

Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.

State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)

Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/ noiseless operation.

Technical Specification

PARAMETER	SinoSpark 1150-12V (950VA)	SinoSpark 1350-12V (1150VA)	SinoSpark 1600-12V (1350VA)	SinoSpark 2650-24V (2300VA)
Mains AC Input Range (Wide Mode)	90V-300V±10V			
Mains AC Input Range (Narrow mode)	180V-260V±10V			
Output Voltage on Mains Mode	Same as Input			
Output Voltage on UPS Mode	210V+10%, -15%			
Output Frequency in UPS Mode	50Hz ± 0.1Hz			
Switching From Mains to UPS and UPS to Mains Mode	Automatic			
Output Waveform on Mains Mode	Same as Input			
Output Waveform On UPS Mode	Pure Sine Wave			
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah			
Charger	CCCV			
UPS Overload/UPS Short Circuit	110% / 300%			
UPS Transfer Time	≤15msec			
Technology	Microcontroller-based design			
Auto Reset Feature	yes			
Operating Temperature	0°C to +45°C			

Note: As part of regular product updates, specifications may be revised without prior notification.

*T&C Apply

Home UPS

WATTRIX - SQUARE WAVE



Models: 700VA to 1700VA

*T&C Apply



Powered By

Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

WATTRIX - SQUARE WAVE



Designed to meet the everyday power needs of modern homes, this Home UPS range offers reliable and efficient backup performance with Square Wave models available from 700VA to 1700VA capacities. Engineered for smooth operation, faster charging, and enhanced protection, these UPS systems ensure uninterrupted comfort during power cuts.

Backed by a 36-months warranty*, the range delivers dependable performance, long-lasting durability, and complete peace of mind for your home.



Reliability

Life. Uninterrupted.



Peak Load Peak Output

Handles higher load comfortably even when multiple appliances start together - without tripping, shutting down, or missing a beat.



Zero Volt Pickup — Works even after Deep Discharge

Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.



In-a-wink Static Changeover — Instant & Silent Switching

Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.



Total Cost of Ownership

A Lifetime of Value



Wide AC Voltage Range + Lightning Protection

Stable operation in real Indian conditions, reducing chances of breakdowns or damage during voltage fluctuations.



Battery High Protection

Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.



State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)

Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/ noiseless operation.

Technical Specification

PARAMETER	WATTRIX 750-12V (700VA)	WATTRIX 950-12V (850VA)	WATTRIX 1050-12V (1000VA)	WATTRIX 1350-12V (1200VA)	WATTRIX 1550-12V (1400VA)	WATTRIX 1950-24V (1700VA)
Mains AC Input Range (Wide Mode)	90V-300V±10V					
Mains AC Input Range (Narrow mode)	180V-260V±10V					
Output Voltage on Mains Mode	Same as Input					
Output Voltage on UPS Mode	210V-220V±10%					
Output Frequency in UPS Mode	50Hz ± 0.1Hz					
Switching From Mains to UPS and UPS to Mains Mode	Automatic					
Output Waveform on Mains Mode	Same as Input					
Output Waveform On UPS Mode	TPZi Wave					
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah					
Charger	CCCV					
UPS Overload/UPS Short Circuit	110% / 300%					
UPS Transfer Time	≤15msec					
Technology	Microcontroller-based design					
Auto Reset Feature	yes					
Operating Temperature	0°C to +45°C					

Note: As part of regular product updates, specifications may be revised without prior notification.

Conventional Tubular Batteries - Regular Series



Up To
20
YEARS*
WARRANTY

10 Years Replacement + 10 Years Pro-Rata

Available Range: 135Ah to 400Ah

Conventional Tubular Batteries - Regular Series

The Eastman Conventional Tubular Battery - Regular Series is a trusted and time-tested power backup solution designed for Indian households and businesses. Built with advanced tubular plate technology, it delivers superior performance, longer backup, and exceptional durability even in extreme temperatures and demanding conditions.

Engineered to efficiently handle deep discharge cycles, it ensures reliable power support during frequent power cuts and heavy usage conditions. With low water topping frequency, high charge acceptance, and robust construction, it offers dependable performance and long service life. Designed for consistent and uninterrupted backup, it is an ideal choice for everyday power needs.



Reliability

Life. Uninterrupted.

Easy Recovery After Idle Period

Comes back to full capacity even after months unused — always ready to power your appliances.

Less Fume Generation

Almost no fumes during charging — safe to install near living spaces, safe for children.

Total Cost of Ownership

A Lifetime of Value

Lowest Electricity Consumption in Recharging

Consumes less Electricity while Charging Battery — saving electricity and your money every day.

Low Water Loss

Almost no water top-up needed — less maintenance, less cost and longer life.

5% Extra Capacity vs. Rated

You get 5% more backup than the label promises — More Power at no extra cost.

Technical Specifications:

Model	Nominal Voltage	Rated Capacity @C20	Warranty (Months)	Warranty Split (Replacement + Pro-rata)	Dimensions			Net Weight (Kg ±3)
					Length (mm ±3)	Width (mm ±3)	Height (mm ±3)	
EM235Duro	12 V	235 Ah	180	90+90	506	207	405	77
EM250IL	12 V	250 Ah	240	120+120	506	207	405	86.25
EM300P	12 V	300 Ah	120	60+60	560	228	431	80.6
EM330P	12 V	330 Ah	120	60+60	560	228	431	92.8
EM400P	12 V	400 Ah	120	60+60	560	228	431	108
EM15048JST	12 V	150 Ah	48	24+24	515	279	273	52.50
EM17072JST	12 V	150 Ah	72	36+36	515	279	273	52.50
EM25060TT	12 V	250 Ah	72	36+36	506	207	405	65.30
EM25120TT	12 V	250 Ah	120	60+60	506	207	405	74.70
EM13572TT	12 V	135 Ah	72	36+36	502	188	352	54.6
EM15096TT	12 V	150 Ah	96	48+48	502	192	405	55
EM16042TT	12 V	160 Ah	84	42+42	506	192	405	57.2
EM16060TT	12 V	160 Ah	60	30+30	506	192	405	55.6
EM16072TT	12 V	160 Ah	72	36+36	506	192	405	56.3
EM18120TT	12 V	180 Ah	120	60+60	506	192	405	65.6
EM22072TT	12 V	220 Ah	72	36+36	506	192	405	72
EM20096TT	12 V	200 Ah	96	48+48	506	192	405	64.7

Note: As part of regular product updates, specifications may be revised without prior notification.

*T&C Apply

Conventional Tubular Batteries - Smart Series



Available Range: 100Ah to 400Ah

Conventional Tubular Batteries - Smart Series

The Eastman Conventional Tubular Battery- Smart Series is a trusted and time-tested power backup solution designed for Indian households and businesses. Built with advanced tubular plate technology, it delivers superior performance, longer backup, and exceptional durability even in extreme temperatures and demanding conditions.

Engineered to efficiently handle deep discharge cycles, it ensures reliable power support during frequent power cuts and heavy usage conditions. With low water topping frequency, high charge acceptance, and robust construction, it offers dependable performance and long service life. Designed for consistent and uninterrupted backup, it is an ideal choice for everyday power needs.



Reliability

Life. Uninterrupted.

Easy Recovery After Idle Period

Comes back to full capacity even after months unused — always ready to power your appliances.

Less Fume Generation

Almost no fumes during charging — safe to install near living spaces, safe for children.

Total Cost of Ownership

A Lifetime of Value

Lowest Electricity Consumption in Recharging

Consumes less Electricity while Charging Battery — saving electricity and your money every day.

Low Water Loss

Almost no water top-up needed — less maintenance, less cost and longer life.

Technical Specifications:

Model	Nominal Voltage	Rated Capacity @C20	Warranty (Months)	Warranty Split (Replacement + Pro-rata)	Dimensions			Net Weight (Kg ±3)
					Length (mm ±3)	Width (mm ±3)	Height (mm ±3)	
EMSS135048JST	12 V	135 Ah	48	24+24	520	213	278	40.70
EMSS150060TT	12 V	150 Ah	60	36+24	506	192	405	53.80
EMSS160060TT	12 V	150 Ah	60	36+24	506	192	405	53.80
EMSS200060TT	12 V	200 Ah	60	36+24	506	207	405	62.50
EMSS100048TT	12 V	100 Ah	48	24+24	506	192	405	49
EMSS120048TT	12 V	120 Ah	48	24+24	506	192	405	47.6
EMSS135048TT	12 V	135 Ah	48	24+24	506	192	405	47.6
EMSS150048TT	12 V	150 Ah	48	24+24	506	192	405	51
EMSS150054TT	12 V	150 Ah	54	30+24	506	192	405	51
EMSS120060TT	12 V	120 Ah	60	36+24	506	192	405	48.8
EMSS135060TT	12 V	135 Ah	60	36+24	506	192	405	52.2
EMSS180060TT	12 V	180 Ah	60	36+24	506	192	405	55
EMSS220060TT	12 V	220 Ah	60	36+24	506	192	405	62.8
EMSS230060TT	12 V	230 Ah	60	36+24	506	192	405	65
EMSS135048STT	12 V	135 Ah	48	24+24	502	188	352	45.3
EMSS150048STT	12 V	150 Ah	48	24+24	502	188	352	45.3
EMSS135060STT	12 V	135 Ah	60	36+24	502	188	352	49
EMSS150060STT	12 V	150 Ah	60	36+24	502	188	352	49
EMSS120048JST	12 V	120 Ah	48	24+24	520	213	279	39
EMSS150048JST	12 V	150 Ah	48	24+24	518	273	276	48.1
EMSS150054JST	12 V	150 Ah	54	30+24	518	273	276	49.2
EMSS270072TT	12 V	250 Ah	72	36+36	506	207	405	65.3
EMSS140072STT	12 V	120 Ah	72	36+36	503	190	348	44.1
EMSS2700120TT	12 V	250 Ah	120	60+60	506	207	405	65.3
EMSS3200120TT	12 V	300 Ah	120	60+60	506	207	405	72
EMSS4200120TT	12 V	400 Ah	120	60+60	560	228	431	81.6

Note: As part of regular product updates, specifications may be revised without prior notification.

*T&C Apply

Conventional Tubular Batteries - CitiMax Series



48
MONTHS*
WARRANTY

24 Months Replacement + **24** Months Pro-Rata

 **Eastman®**

48 MONTHS WARRANTY

EC25048TT

#TheWiseChoice

EPR Registration Number : 542482

- Low Cost of Ownership
- Low Water Loss
- Easy Recovery After Idle Period
- 2% Extra Capacity & Backup WRT Rated Capacity
- Lowest Electricity Consumption in Recharging
- Less Fumes Generation

Conventional Tubular Batteries - CitiMax Series

The Eastman Conventional Tubular Battery - CitiMax is a trusted and time-tested power backup solution designed for Indian households. Built with advanced tubular plate technology, it delivers superior performance, longer backup, and exceptional durability even in extreme temperatures and demanding conditions.

Engineered to efficiently handle deep discharge cycles, it ensures reliable power support during frequent power cuts and heavy usage conditions. With low water topping frequency, high charge acceptance, and robust construction, it offers dependable performance and long service life. Designed for consistent and uninterrupted backup, it is an ideal choice for everyday power needs.



Reliability

Life. Uninterrupted.

Easy Recovery After Idle Period

Comes back to full capacity even after months unused — always ready to power your appliances.

Less Fume Generation

Almost no fumes during charging — safe to install near living spaces, safe for children.

Total Cost of Ownership

A Lifetime of Value

Lowest Electricity Consumption in Recharging

Consumes less Electricity while Charging Battery — saving electricity and your money every day.

Low Water Loss

Almost no water top-up needed — less maintenance, less cost and longer life.

5% Extra Capacity vs. Rated

You get 5% more backup than the label promises — More Power at no extra cost.

Technical Specifications:

Description	Parameters			
Model	EC 18048 ST	EC 15048 ST	EC 18048 TT	EC 25048 TT
Nominal Voltage	12V	12V	12V	12V
Warranty	(24 +24) Months*	(24 +24) Months*	(24 +24) Months*	(24 +24) Months*
Terminal Type (Layout)	R	R	L	L
Charging Type	CC/CV	CC/CV	CC/CV	CC/CV
Float Voltage	14.4	14.4	14.4	14.4
Maximum Charging Current @27°C	19.8A	16.2A	21.6A	32.4A
Deep Discharge capability	80%	80%	80%	80%
Cycle Life	950	800	950	800
Length(±3mm)	515	520	506	506
Width(±3mm)	279	278	192	207
Height(±3mm)	273	213	405	405
Net Weight (±3 kg)	48.1	39	51.6	62.2
Gross Battery Weight (±3 Kg)	49.9	40.8	53.4	64.1

Note: As part of regular product updates, specifications may be revised without prior notification.

*T&C Apply

LithTec Combo

(Home UPS + Lithium Battery)



LithTec Combo

(Home UPS + Lithium Battery)



Home UPS + Lithium Battery Combo Chart

Sine Wave Home UPS Model	Square Wave Home UPS Model	Battery Model Name	Battery Capacity
950-12V 1300-12V 1650-12V	850VA-12V 1200VA-12V 1500VA-12V	EM LIB 160	12.8V-100Ah
950-12V 1300-12V 1650-12V	850VA-12V 1200VA-12V 1500VA-12V	EM LIB 240	12.8V-150Ah
2200-24V	2000VA-24V	EM LIB 320	25.6V-100Ah
2200-24V 3125VA-24V	2000VA-24V	EM LIB 480	25.6V-150Ah
5000VA-48V	-	EM LIB 960	51.2V-150Ah

*T&C Apply

Lead Acid Replacement Lithium Batteries (LIB)



The Eastman Lead Acid Replacement Lithium Battery is a next-generation power solution engineered for superior, long-lasting performance. Backed by a 60-months warranty, it gives users the confidence of reliable, uninterrupted power — making it a smarter and more dependable energy choice for modern needs.

At the heart of this battery lies the advanced Lithium technology, which delivers higher energy efficiency, faster charging, and extended life cycles — all packed into a lightweight, maintenance-free design. No top-ups, no checks, no hassle — just clean, consistent, and powerful energy whenever you need it.

It offers seamless compatibility with existing setups and ensures greater reliability and sustainability in every use. source — it is a smarter way to stay powered up.



Reliability

Life. Uninterrupted.

Lighter in Weight — Easy to Handle & Install
No heavy lifting, no extra labour cost, no space hunting — it fits where you need it and moves when you do.

Eastman iConnect App - Monitoring
Check your battery's health on your Mobile - Charge status, fault alerts and diagnostics all in one place.

Smart BMS - Battery Management System
Ensures battery stays protected, performs at its best and lasts years longer.

Total Cost of Ownership

A Lifetime of Value

Longer Life
Lasts longer. Costs less over time - every rupee you spent keeps working far longer.

Maintenance-Free
Install it and forget about it. No maintenance visits, no consumable costs — the battery runs reliably on its own for years.

Technical Specifications:

Model	EM LIB 160	EM LIB 240	EM LIB 320	EM LIB 480	EM LIB 960
Battery Rating	12.8V-100Ah	12.8V-150Ah	25.6V-100Ah	25.6V-150Ah	51.2V-150Ah
Battery Operating Voltage (V)	10.6-14.6	10.6-14.6	21.2-29.2	21.2-29.2	42.4-58.4
Operating Temp Range (Charging)	0-60°C	0-60°C	0-60°C	0-60°C	0-60°C
Recommended Charge Current	20A	30A	20A	30A	30A
Recommended Discharge Current	50A	75A	50A	75A	75A
Battery Mass	≈ 13 kg	≈ 18 kg	≈ 27 kg	≈ 37 kg	≈ 68 kg
Warranty	5 Years*	5 Years*	5 Years	5 Years	5 Years
Battery Dimension (mm) LxWxH	330*210*160	330*235*217	460*308*202.5	390*323*269.5	500*391*309
BMS Type	Smart	Smart	Smart	Smart	Smart

Note: As part of regular product updates, specifications may be revised without prior notification.

*T&C Apply



Lithium Enabled Home UPS Sine Wave & Square Wave

The Eastman Home UPS, a key component of the LithTec Combo comes with a warranty of Up to 60 months* is designed to deliver uninterrupted, efficient, and reliable power for homes.

Built with advanced technology, it ensures faster charging, optimal battery performance and seamless backup during power cuts. Compact, durable, and user-friendly, it perfectly complements the Eastman Lithium Battery for a complete energy solution.

Up to
60
MONTHS*
WARRANTY



Reliability Life. Uninterrupted.



Pure Sine Wave Output with Noiseless Operation

Protects appliances from damage and ensures smooth operation without humming noise or performance issues.



Zero Volt Pickup — Works even after Deep Discharge

Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.



In-a-wink Static Changeover — Instant & Silent Switching

Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.



Total Cost of Ownership A Lifetime of Value



State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)

Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/ noiseless operation.



Battery High Protection

Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.



Wide AC Voltage Range + Lightning Protection

Stable operation in real Indian conditions, reducing chances of breakdowns or damage during voltage fluctuations

Technical Specifications of Sine Wave Inverters:

Parameters	950-12V (850VA)	1300-12V (1200VA)	1650-12V (1500VA)	2200-24V (2000VA)	3125VA-24V	5000VA-48V
Mains AC Input Range (Wide Mode)	90V-300V±10V				120V-275V±10V	
Mains AC Input Range (Narrow mode)	180V-260V±10V				180V-260V±10V	
Output Voltage on Mains Mode	Same as Input				Same as Input	
Output Voltage on UPS Mode	210V+10%, -15%				220V +5% -18%	
Output Frequency in UPS Mode	50Hz ± 0.1Hz				50Hz ± 0.2Hz	
Switching From Mains to UPS and UPS to Mains Mode	Automatic				Automatic	
Output Waveform on Mains Mode	Same as Input				Same as Input	
Output Waveform On UPS Mode	Pure Sine Wave					
Charger	CCCV					
UPS Overload/UPS Short Circuit	110% / 300%				110% / 300%	
UPS Transfer Time	≤15msec				≤15msec	
Technology	Microcontroller-based design				dsPIC Based Design	
Auto Reset Feature	yes				yes	
Operating Temperature	0°C to +45°C				0°C to +45°C	

Note: As part of regular product updates, specifications may be revised without prior notification.

*T&C Apply

Technical Specifications of Square Wave Inverters:

Parameters	850VA-12V	1200VA-12V	1500VA-12V	2000VA-24V
Mains AC Input Range (Wide Mode)	90V-300V±10V			
Mains AC Input Range (Narrow mode)	180V-260V±10V			
Output Voltage on Mains Mode	Same as Input			
Output Voltage on UPS Mode	210V+10%, -15%			
Output Frequency in UPS Mode	50Hz ± 0.1Hz			
Switching From Mains to UPS and UPS to Mains Mode	Automatic			
Output Waveform on Mains Mode	Same as Input			
Charger	CCCV			
UPS Overload/UPS Short Circuit	110% / 300%			
UPS Transfer Time	≤15msec			
Technology	Microcontroller-based design			
Auto Reset Feature	yes			
Operating Temperature	0°C to +45°C			

Note: As part of regular product updates, specifications may be revised without prior notification.

Eastman iConnect App

Smart Control in Your Hands



Enhance your power backup experience with intelligent energy management designed for modern homes and businesses. The Eastman Lithium Hybrid Inverter delivers seamless performance with real-time power optimization, smart battery compatibility, and efficient energy utilization. Stay in control with reliable backup, faster charging, and uninterrupted comfort—giving you greater confidence during every power outage.



Real-Time Power Status: Monitor live battery backup, charging status, and power consumption anytime, anywhere. Stay informed about available backup before and during power outages.



Smart Energy Tracking: Track power usage patterns and optimize energy consumption for better efficiency and longer backup performance.




Bluetooth Connectivity with BMS: Seamlessly connect your smartphone to the inverter's Battery Management System (BMS) for instant monitoring, diagnostics, and performance updates.



Intelligent Usage Insights: Analyze battery health, charging cycles, and energy usage trends to maximize battery life and overall system efficiency.



Prevent Unexpected Power Failures: Stay updated on battery and inverter health to avoid sudden breakdowns and ensure uninterrupted power backup with complete peace of mind.

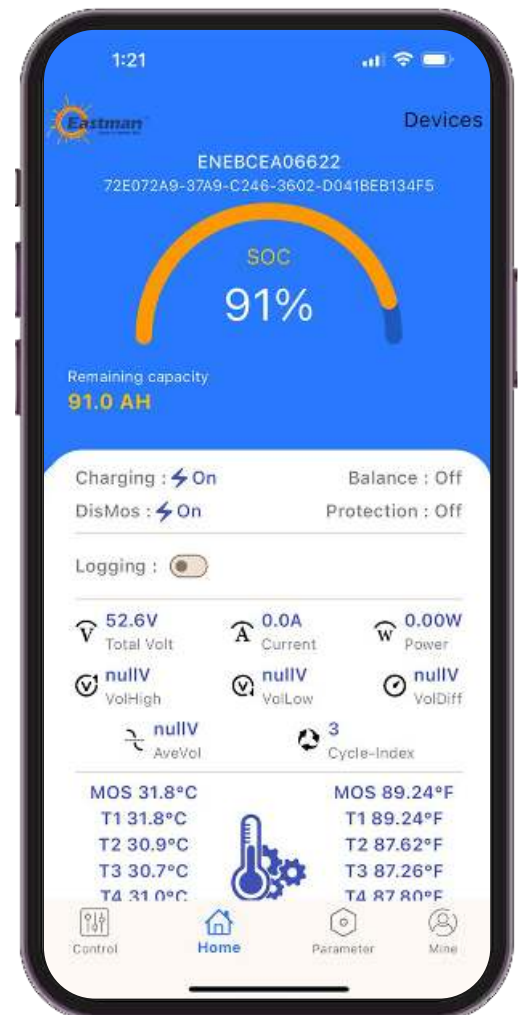

Eastman iConnect App



Empower your energy experience with **Eastman iConnect App**

Download now from Google Play & App Store



With the Eastman iConnect App, all your energy data is securely stored on Indian servers, fully compliant with Indian data regulations. This ensures complete safety, privacy and peace of mind — keep the system protected within the country's trusted digital infrastructure.



Round-the-Clock Service

At Eastman, great products deserve equally great service. Through Eastman Assure, we've built a customer-first ecosystem that ensures quick resolutions, proactive support, and peace of mind — every step of the way.



AI-Powered Voice Bot

- Get instant support anytime without waiting or follow-ups.
- Raise requests and check warranty or complaint status in seconds.



78884 78885



24x7 Call Centre

- Expert help is always available, day or night.
- Quick, reliable support for installation, service, and troubleshooting.



1800-419-8610



Online Complaint Management

- Track your complaint in real time with complete visibility.
- Stay informed at every step until your issue is resolved.



Eastman Assure Portal

- One place for all your service needs, simple and convenient.
- Manage warranty, complaints, and service history with ease.



We are 24x7 Available!

+91 78728 78728
WhatsApp

1800 419 8610
Toll Free Number

www.eastmanassure.com
Service Portal



☎ 1800 419 8610 | ☎ +91 78884 78885



Eastman Auto & Power Ltd.

Corporate Office: Quattro Towers, Plot No. 249E, Udyog Vihar Phase IV, Gurugram,
Haryana-122016, India | support@eaplworld.com | ☎ 78728 78728
www.eaplworld.com

 **MADE IN INDIA**