



#TheWiseChoice

Continued Energy Solutions

Everyday, A Little Further



Forever Forward.

For India, Its People and What Comes Next

ENERGY TRANSITION COMPANY

Purpose-built to move India and its people permanently forward.

We operate at the intersection of where energy access meets everyday life: last mile e-mobility that puts livelihoods in motion, Residential Solar with Storage that brings energy independence to homes and businesses and advanced electronics manufacturing that builds the technological backbone of a cleaner economy.





₹5601 Cr.*
FY25-26 Turnover



CAGR 29.6%
Last 4 Fiscal Years



Over **4100+**
Employees



1900+
Distributors

Home UPS

SINO - SINE WAVE



Models: 900VA to 15000VA



Powered By

Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

SINO - SINE WAVE



Experience uninterrupted and intelligent power backup with the Eastman Sine Wave Inverter range, engineered with advanced Unity Power Factor technology for maximum efficiency and reliable performance. Designed to deliver pure sine wave output for the safety of sensitive appliances, these inverters effortlessly run LED TVs, refrigerators, laptops, Wi-Fi routers, air coolers, and other modern home essentials.

Available from 900VA to 15000VA capacities, the range features Zero-Volt Pickup, Peak Load Peak Output (PLPO), superior full-load performance at nominal battery voltage, and smooth operation for compressor and motor-based appliances. Backed by a 60-months warranty, Eastman Sine Wave Inverters combine powerful performance, energy efficiency, and long-lasting durability for modern Indian homes and businesses.



Reliability

Life. Uninterrupted.



Pure Sine Wave Output with Noiseless Operation

Protects appliances from damage and ensures smooth operation without humming noise or performance issues.



Zero Volt Pickup — Works even after Deep Discharge

Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.



In-a-wink Static Changeover — Instant & Silent Switching

Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.



Total Cost of Ownership

A Lifetime of Value



VA = Watt: Providing Full Rated Power

What's promised is what's delivered — full power, every single day, no hidden cuts.



Battery High Protection

Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.



State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)

Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/noiseless operation.

Technical Specification

PARAMETER	SINO 900VA-12V	SINO 1050VA-12V	SINO 1200VA-12V
Mains AC Input Range (Wide Mode)	90V-300V ± 10V		
Mains AC Input Range (Narrow mode)	180V-260V±10V		
Output Voltage on Mains Mode	Same as Input		
Output Voltage on UPS Mode	210V+10%, -15%		
Output Frequency in UPS Mode	50Hz ± 0.1Hz		
Switching From Mains to UPS and UPS to Mains Mode	Automatic		
Output Waveform on Mains Mode	Same as Input		
Output Waveform On UPS Mode	Pure Sine Wave		
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah		
Charger	CCCV		
UPS Overload/UPS Short Circuit	110% / 300%		
UPS Transfer Time	15msec		
Technology	Microcontroller-based design		
Auto Reset Feature	yes		
Operating Temperature	0°C to +45°C		

*T&C Apply

Note: As part of regular product updates, specifications may be revised without prior notification.

Technical Specification

PARAMETER	SINO 1800VA-24V	SINO 2200VA-24V	SINO 2500VA-24V
Mains AC Input Range (Wide Mode)	90V-300V $\pm$ 10V		120V-275V $\pm$ 10V
Mains AC Input Range (Narrow mode)	180V-260V $\pm$ 10V		180V-260V $\pm$ 10V
Output Voltage on Mains Mode	Same as Input		Same as Input
Output Voltage on UPS Mode	210V+10%, -15%		220V $\pm$ 15%
Output Frequency in UPS Mode	50Hz $\pm$ 0.1Hz		50Hz $\pm$ 0.2Hz
Switching From Mains to UPS and UPS to Mains Mode	Automatic		
Output Waveform on Mains Mode	Same as Input		
Output Waveform On UPS Mode	Pure Sine Wave		
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah		
Charger	CCCV		Boost Based PWM Control Multi-Stage Technology with GPM
UPS Overload/UPS Short Circuit	110% / 300%		
UPS Transfer Time	15msec		
Technology	Microcontroller-based design		
Auto Reset Feature	yes		
Operating Temperature	0°C to +45°C		

Note: As part of regular product updates, specifications may be revised without prior notification.

Technical Specification

PARAMETER	SINO 4000VA-48V	SINO 5000VA-48V	SINO 5500VA-48V
Mains AC Input Range (Wide Mode)	120V-275V $\pm$ 10V		
Mains AC Input Range (Narrow mode)	180V-260V $\pm$ 10V		
Output Voltage on Mains Mode	Same as Input		
Output Voltage on UPS Mode	220V $\pm$ 15%		
Output Frequency in UPS Mode	50Hz $\pm$ 0.2Hz		
Switching From Mains to UPS and UPS to Mains Mode	Automatic		
Output Waveform on Mains Mode	Same as Input		
Output Waveform On UPS Mode	Pure Sine Wave		
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah		
Charger	Boost Based PWM Control Multi-Stage Technology with GPM		
UPS Overload/UPS Short Circuit	110% / 300%		
UPS Transfer Time	15msec		
Technology	Microcontroller-based design		
Auto Reset Feature	yes		
Operating Temperature	0°C to +45°C		

Note: As part of regular product updates, specifications may be revised without prior notification.

Technical Specification

PARAMETER	SINO 7500VA-96V	SINO 10000VA-120V	SINO 15000VA-180V
Mains AC Input Range (Wide Mode)	120V-295V $\pm$ 10V		
Mains AC Input Range (Narrow mode)	180V-265V $\pm$ 10V		
Output Voltage on Mains Mode	Same as Input		
Output Voltage on UPS Mode	220V $\pm$ 15%		
Output Frequency in UPS Mode	50Hz $\pm$ 0.2Hz		
Switching From Mains to UPS and UPS to Mains Mode	Automatic		
Output Waveform on Mains Mode	Same as Input		
Output Waveform On UPS Mode	Pure Sine Wave		
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah		
Charger	CC - CV		
UPS Overload/UPS Short Circuit	110% / 300%		
UPS Transfer Time	15msec		
Technology	Microcontroller-based design		
Auto Reset Feature	yes		
Operating Temperature	0°C to +45°C		

Note: As part of regular product updates, specifications may be revised without prior notification.

Home UPS

ELECTRO - SQUARE WAVE



Models: 700VA to 2000VA



Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

ELECTRO - SQUARE WAVE



Experience reliable power backup with the Eastman Square Wave Inverter Range, powered by advanced Unity Power Factor technology for high efficiency and dependable performance.

Available from 700VA to 2000VA capacities, these inverters smoothly run TVs, refrigerators, laptops, Wi-Fi routers, air coolers, and other essential appliances. Key features include Zero-Volt Pickup, Peak Load Peak Output (PLPO), superior full-load performance, and efficient support for motor and compressor-based loads.

Backed by a 60-month warranty, Eastman delivers powerful, efficient, and durable backup solutions for modern homes and businesses.



Reliability

Life. Uninterrupted.



Peak Load Peak Output

Handles higher load comfortably even when multiple appliances start together - without tripping, shutting down, or missing a beat.



Zero Volt Pickup — Works even after Deep Discharge

Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.



In-a-wink Static Changeover — Instant & Silent Switching

Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.



Total Cost of Ownership

A Lifetime of Value



VA = Watt: Providing Full Rated Power

What's promised is what's delivered — full power, every single day, no hidden cuts.



Battery High Protection

Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.



State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)

Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/noiseless operation.

Technical Specification

PARAMETER	ELECTRO 700VA-12V	ELECTRO 900VA-12V	ELECTRO 1100VA-12V	ELECTRO 1400VA-12V	ELECTRO 1800VA-24V	ELECTRO 2000VA-24V
Mains AC Input Range (Wide Mode)	90V-300V $\pm$ 10V					
Mains AC Input Range (Narrow mode)	180V-260V $\pm$ 10V					
Output Voltage on Mains Mode	Same as Input					
Output Voltage on UPS Mode	210V-220V $\pm$ 10%					
Output Frequency in UPS Mode	50Hz $\pm$ 0.1Hz					
Switching From Mains to UPS and UPS to Mains Mode	Automatic					
Output Waveform on Mains Mode	Same as Input					
Output Waveform On UPS Mode	TPZi Wave					
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah					
Charger	CCCV					
UPS Overload/UPS Short Circuit	110% / 300%					
UPS Transfer Time	15msec					
Technology	Microcontroller-based design					
Auto Reset Feature	yes					
Operating Temperature	0°C to +45°C					

*T&C Apply

Note: As part of regular product updates, specifications may be revised without prior notification.

Home UPS

OMEGA - SINE WAVE



Models: 1000VA to 2000VA



Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

OMEGA - SINE WAVE



Designed to meet the everyday power needs of modern homes, this Home UPS range offers reliable and efficient backup performance with Sine Wave models available from 1000VA to 2000VA capacities. Engineered for smooth operation, faster charging, and enhanced protection, these UPS systems ensure uninterrupted comfort during power cuts.

Backed by a 48-month warranty*, the range delivers dependable performance, long-lasting durability, and complete peace of mind for your home.



Reliability

Life. Uninterrupted.

Pure Sine Wave Output with Noiseless Operation

Protects appliances from damage and ensures smooth operation without humming noise or performance issues.

Zero Volt Pickup — Works even after Deep Discharge

Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.

In-a-wink Static Changeover — Instant & Silent Switching

Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.

Total Cost of Ownership

A Lifetime of Value

Wide AC Voltage Range + Lightning Protection

Stable operation in real Indian conditions, reducing chances of breakdowns or damage during voltage fluctuations.

Battery High Protection

Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.

State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)

Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/ noiseless operation.


Technical Specification

PARAMETER	OMEGA 1000VA-12V	OMEGA 1200VA-12V	OMEGA 1500VA-12V	OMEGA 2000VA-24V
Mains AC Input Range (Wide Mode)	90V-300V±10V			
Mains AC Input Range (Narrow mode)	180V-260V±10V			
Output Voltage on Mains Mode	Same as Input			
Output Voltage on UPS Mode	210V+10%, -15%			
Output Frequency in UPS Mode	50Hz ± 0.1Hz			
Switching From Mains to UPS and UPS to Mains Mode	Automatic			
Output Waveform on Mains Mode	Same as Input			
Output Waveform On UPS Mode	Pure Sine Wave			
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah			
Charger	CCCV			
UPS Overload/UPS Short Circuit	110% / 300%			
UPS Transfer Time	≤15msec			
Technology	Microcontroller-based design			
Auto Reset Feature	yes			
Operating Temperature	0°C to +45°C			

Note: As part of regular product updates, specifications may be revised without prior notification.

Home UPS

SIGMA - SQUARE WAVE

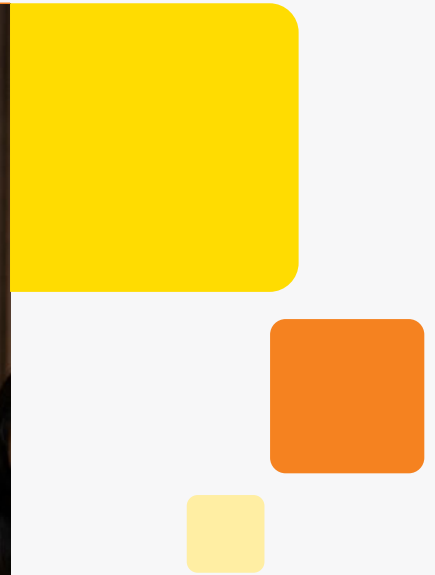

Model: 700VA to 2000VA



Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

SIGMA - SQUARE WAVE

Powered By
InstantIQ

Designed to meet the everyday power needs of modern homes, this Home UPS range offers reliable and efficient backup performance with Square Wave models available from 700VA to 2000VA capacities. Engineered for smooth operation, faster charging, and enhanced protection, these UPS systems ensure uninterrupted comfort during power cuts.

Backed by a 48-month warranty*, the range delivers dependable performance, long-lasting durability, and complete peace of mind for your home.



Reliability

Life. Uninterrupted.

Peak Load Peak Output
Handles higher load comfortably even when multiple appliances start together - without tripping, shutting down, or missing a beat.

Zero Volt Pickup — Works even after Deep Discharge
Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.

In-a-wink Static Changeover — Instant & Silent Switching
Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.

Total Cost of Ownership

A Lifetime of Value

Wide AC Voltage Range + Lightning Protection
Stable operation in real Indian conditions, reducing chances of breakdowns or damage during voltage fluctuations.

Battery High Protection
Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.

State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)
Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/ noiseless operation.

Technical Specification

PARAMETER	SIGMA 700VA-12V	SIGMA 850VA-12V	SIGMA 1000VA-12V	SIGMA 1200VA-12V	SIGMA 1500VA-12V	SIGMA 2000VA-24V
Mains AC Input Range (Wide Mode)	90V-300V±10V					
Mains AC Input Range (Narrow mode)	180V-260V±10V					
Output Voltage on Mains Mode	Same as Input					
Output Voltage on UPS Mode	210V+10%, -15%					
Output Frequency in UPS Mode	50Hz ± 0.1Hz					
Switching From Mains to UPS and UPS to Mains Mode	Automatic					
Output Waveform on Mains Mode	Same as Input					
Output Waveform On UPS Mode	TPZi Wave					
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah					
Charger	CCCV					
UPS Overload/UPS Short Circuit	110% / 300%					
UPS Transfer Time	≤15msec					
Technology	Microcontroller-based design					
Auto Reset Feature	yes					
Operating Temperature	0°C to +45°C					

Note: As part of regular product updates, specifications may be revised without prior notification.

Home UPS

SINOSPARK - SINE WAVE



Models: 950VA to 2300VA



Powered By

Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

SINOSPARK - SINE WAVE



Designed to meet the everyday power needs of modern homes, this Home UPS range offers reliable and efficient backup performance with Sine Wave models available range from 950VA to 2300VA capacities. Engineered for smooth operation, faster charging, and enhanced protection, these UPS systems ensure uninterrupted comfort during power cuts.

Backed by a 36-month warranty*, the range delivers dependable performance, long-lasting durability, and complete peace of mind for your home.



Reliability

Life. Uninterrupted.

Pure Sine Wave Output with Noiseless Operation

Protects appliances from damage and ensures smooth operation without humming noise or performance issues.

Zero Volt Pickup — Works even after Deep Discharge

Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.

In-a-wink Static Changeover — Instant & Silent Switching

Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.

Total Cost of Ownership

A Lifetime of Value

Wide AC Voltage Range + Lightning Protection

Stable operation in real Indian conditions, reducing chances of breakdowns or damage during voltage fluctuations.

Battery High Protection

Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.

State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)

Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/ noiseless operation.

Technical Specification

PARAMETER	SinoSpark 1150-12V (950VA)	SinoSpark 1350-12V (1150VA)	SinoSpark 1600-12V (1350VA)	SinoSpark 2650-24V (2300VA)
Mains AC Input Range (Wide Mode)	90V-300V±10V			
Mains AC Input Range (Narrow mode)	180V-260V±10V			
Output Voltage on Mains Mode	Same as Input			
Output Voltage on UPS Mode	210V+10%, -15%			
Output Frequency in UPS Mode	50Hz ± 0.1Hz			
Switching From Mains to UPS and UPS to Mains Mode	Automatic			
Output Waveform on Mains Mode	Same as Input			
Output Waveform On UPS Mode	Pure Sine Wave			
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah			
Charger	CCCV			
UPS Overload/UPS Short Circuit	110% / 300%			
UPS Transfer Time	≤15msec			
Technology	Microcontroller-based design			
Auto Reset Feature	yes			
Operating Temperature	0°C to +45°C			

Note: As part of regular product updates, specifications may be revised without prior notification.

Home UPS

WATTRIX - SQUARE WAVE



Models: 700VA to 1700VA



Powered By

Engineered for high-performance, Home inverter features a processor capable of high million instructions per second. This rapid processing power allows the inverter to instantly process critical data such as high voltage spikes and short circuit protection.

Home UPS

WATTRIX - SQUARE WAVE



Designed to meet the everyday power needs of modern homes, this Home UPS range offers reliable and efficient backup performance with Square Wave models available from 700VA to 1700VA capacities. Engineered for smooth operation, faster charging, and enhanced protection, these UPS systems ensure uninterrupted comfort during power cuts.

Backed by a 36-months warranty*, the range delivers dependable performance, long-lasting durability, and complete peace of mind for your home.



Reliability

Life. Uninterrupted.

Peak Load Peak Output
Handles higher load comfortably even when multiple appliances start together - without tripping, shutting down, or missing a beat.

Zero Volt Pickup — Works even after Deep Discharge
Keeps electricity available in extreme low-voltage situations, reducing chances of complete blackout at home.

In-a-wink Static Changeover — Instant & Silent Switching
Switchover happens so fast that your lights, fans, and Wi-Fi never flicker — not even for a split second.

Total Cost of Ownership

A Lifetime of Value

Wide AC Voltage Range + Lightning Protection
Stable operation in real Indian conditions, reducing chances of breakdowns or damage during voltage fluctuations.

Battery High Protection
Battery always stays in the safe zone — neither deep discharge nor overcharging — it performs better and lasts much longer.

State-of-the-Art High-End Microcontroller — High Million Instructions per Second (MIPS)
Keeps the system stable during changeover and voltage fluctuations, improving battery life and providing smooth/ noiseless operation.

Technical Specification

PARAMETER	WATTRIX 750-12V (700VA)	WATTRIX 950-12V (850VA)	WATTRIX 1050-12V (1000VA)	WATTRIX 1350-12V (1200VA)	WATTRIX 1550-12V (1400VA)	WATTRIX 1950-24V (1700VA)
Mains AC Input Range (Wide Mode)	90V-300V±10V					
Mains AC Input Range (Narrow mode)	180V-260V±10V					
Output Voltage on Mains Mode	Same as Input					
Output Voltage on UPS Mode	210V-220V±10%					
Output Frequency in UPS Mode	50Hz ± 0.1Hz					
Switching From Mains to UPS and UPS to Mains Mode	Automatic					
Output Waveform on Mains Mode	Same as Input					
Output Waveform On UPS Mode	TPZi Wave					
Battery Charging Current	Constant Charging approx 10% of the rated battery current in Ah					
Charger	CCCV					
UPS Overload/UPS Short Circuit	110% / 300%					
UPS Transfer Time	≤15msec					
Technology	Microcontroller-based design					
Auto Reset Feature	yes					
Operating Temperature	0°C to +45°C					

Note: As part of regular product updates, specifications may be revised without prior notification.


Eastman *Assure*TM

Promise

Round-the-Clock Service

At Eastman, great products deserve equally great service. Through Eastman Assure, we've built a customer-first ecosystem that ensures quick resolutions, proactive support, and peace of mind — every step of the way.



AI-Powered Voice Bot

- Get instant support anytime without waiting or follow-ups.
- Raise requests and check warranty or complaint status in seconds.


78884 78885


24x7 Call Centre

- Expert help is always available, day or night.
- Quick, reliable support for installation, service, and troubleshooting.


1800-419-8610


Online Complaint Management

- Track your complaint in real time with complete visibility.
- Stay informed at every step until your issue is resolved.



Eastman Assure Portal

- One place for all your service needs, simple and convenient.
- Manage warranty, complaints, and service history with ease.



We are 24x7 Available!

+91 78728 78728
WhatsApp

1800 419 8610
Toll Free Number

www.eastmanassure.com
Service Portal



☎ 1800 419 8610 | ☎ +91 78884 78885



Eastman Auto & Power Ltd.

Corporate Office: Quattro Towers, Plot No. 249E, Udyog Vihar Phase IV, Gurugram,
Haryana-122016, India | support@eaplworld.com | ☎ 78728 78728
www.eaplworld.com

 **MADE IN INDIA**