

EQVIMECH PVT. LTD.

UNIVERSAL TESTING MACHINE



CIVIL INDUSTRY LABORATORY EQUIPMENTS



**CONCRETE PERMEABILITY APPARATUS
AS PER IS 516 | DIN 1048 | EN12390**



**PERMEABILITY TEST UNIT
AS PER IS 2645**

VERTICAL SEALANT TESTER AS PER ASTM C719 | EN 1062 | ASTM C1305



HOT AIR OVEN



HUMIDITY CHAMBER

MAKE IN INDIA

STANDARDS AS PER
ASTM | ISO | IS | EN | DIN

+91 9768 96 5929 / 70218 81456

eqvimechsales@gmail.com / eqvimech@gmail.com
www.eqvimech.in / www.eqvimech.com

Reach us at : Gala no. A-57, Kohinur Industrial Complex, Plot no. J7/J8/J9 Taloja MIDC, Navi Mumbai, Maharashtra - 410208



EQVIMECH



EQVIMECH
PVT. LTD.

UNIVERSAL TESTING MACHINE



Applications / Testing of :

- Tile Adhesive / Tiles
- Rubber / Elastomers
- Plastics / Composites
- Needle / Syringes
- Wire / cables
- Metal - Tensile / Flexural
- Geo-Textile Grids / Fabric
- Sealant / Paints
- Plywood / Engg. Materials
- Gold / Silver / Titanium

EQVIMECH'S

COMPACT DESIGN & RELIABILITY



MELT FLOW INDEX TESTER



CONCRETE PERMEABILITY APPARATUS



HOT AIR OVEN



SEALANT TESTER



HUMIDITY CHAMBER



NEEDLE TESTER



DUMBBELL PRESS



COOLING CHAMBER

MAKE IN INDIA

STANDARDS AS PER
ASTM | ISO | IS | EN | DIN

+91 9768 96 5929 / 70218 81456

eqvimechsales@gmail.com / eqvimech@gmail.com

www.eqvimech.in / www.eqvimech.com

Reach us at :A-57, Kohinur Industrial Complex, Taloja
MIDC, Navi Mumbai, Maharashtra - 410208



EQVIMECH



EQVIMECH
PVT. LTD.

UNIVERSAL TESTING MACHINE




Test Mode:

- Strain Rate - mm/min
- Load Rate - N/sec & N/min
- Stress Rate - Mpa/min

Applications / Testing of :

- Tile Adhesive / Tiles
- Rubber / Elastomers
- Plastics / Composites
- Needle / Syringes
- Wire / cables
- Metal - Tensile / Flexural
- Geo-Textile Grids / Fabric
- Sealant / Paints
- Plywood / Engg. Materials
- Gold / Silver / Titanium

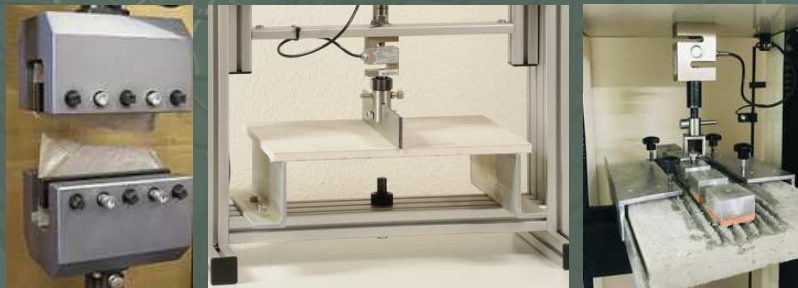

EQVIMECH'S

MULTI-FUNCTION UTM WITH MULTI-FEATURED SOFTWARE



TENSILE TEST



FLEXURAL / BENDING TEST




COMPRESSION TEST




STRAIN RATE = MM/MIN



LOAD RATE = N/SEC

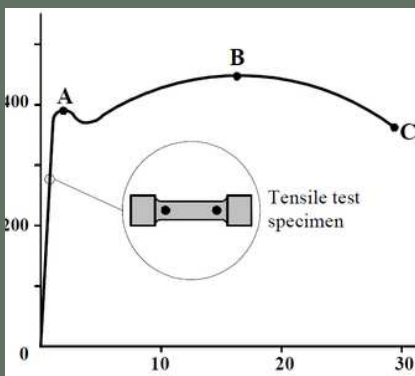

DESTRUCTIVE TEST

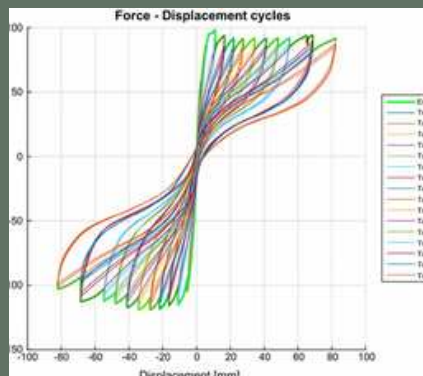

NON-DESTRUCTIVE



EXTENSOMETER MODE

MAKE IN INDIA

STANDARDS AS PER
ASTM | ISO | IS | EN | DIN

+91 9768 96 5929 / 70218 81456

eqvimechsales@gmail.com / eqvimech@gmail.com
www.eqvimech.in / www.eqvimech.com

Reach us at : Gala no. A-57, Kohinur Industrial Complex, Plot
no. J7/J8/J9 Talaja MIDC, Navi Mumbai, Maharashtra - 410208

SM



EQVIMECH
PVT. LTD.

HOT AIR OVEN

EQVIMECH



Operating Temperature:

- 50°C-250°C Accuracy $\pm 2^\circ\text{C}$

Applications / Testing of :

- Tile Adhesive / Tiles | Rubber / Elastomers
- Plastics / Composites | Needle / Syringes
- Wire / cables | Metal - Tensile / Flexural
- Geo-Textile Grids / Fabric | Sealant / Paints
- Plywood / Engg. Materials | Gold / Silver / Titanium

Specifications:

- Double walled inner made of thick stainless steel, outer made of heavy duty / G.I. duly powder coated. The inner body is lagged with glass wool Insulation

Power Rating:

- 230V AC 1phase

Size	Size	Capacity	Ratings	Standard Model
CM	Inch	Litres	Watts	Price
30x30x30	12"x12"x12"	27	1250	22800
35x35x35	14"x14"x14"	44	1450	25200
45x45x45	18"x18"x18"	90	1750	29900
45x45x60	18"x18"x24"	120	2000	37500
60x60x60	24"x24"x24"	220	2500	52000
45x60x90	18"x24"x36"	250	3000	59600
60x60x90	24"x24"x36"	330	3500	65800



HOT AIR OVEN

Operating Temperature:

- 50°C-250°C
- Accuracy $\pm 0.5^\circ\text{C}$
- Uniformity $\pm 2.0^\circ\text{C}$

Power Rating:

- 230V AC 1phase

Applications / Testing of :

- Medical / Pharmaceuticals | Needle / Syringes
- Tile Adhesive / Tiles | Rubber / Elastomers
- Wire / cables | Metal - Tensile / Flexural
- Geo-Textile Grids / Fabric | Sealant / Paints
- Plywood / Engg. Materials | Gold / Silver / Titanium

Specifications:

- Better Insulation
- 0 contact between inner and outer casing. The thick glasswool sheet insulation.
- Excellent thermal stability
- Low heat dissipation | Reduced energy costs
- Low surface temperatures



Size CM	Size Inch	Capacity Litres	Ratings Watts	Premium Model Price
35X35X41	12"X12"X12"	50	750	39,500
45X45X50	18"X18"X18"	100	1500	45,750
60X60X60	24"X24"X24"	215	2250	70,750
60X60X90	24"X24"X36"	320	3000	95,750
600X600X1200	24"X24"X48"	430	3500	1,14,500



EQVIMECH

HUMIDITY CHAMBER

Temperature & Humidity

- +2°C To +60°C
- 40% ~ 95%RH
- Accuracy $\pm 0.5^\circ\text{C}$
- Uniformity $\pm 2.0^\circ\text{C}$

Power Rating:

- 230V AC 1phase

Applications / Testing of :

- Medical / Pharmaceuticals | Needle / Syringes
- Tile Adhesive / Tiles | Rubber / Elastomers
- Wire / cables | Metal - Tensile / Flexural
- Geo-Textile Grids / Fabric | Sealant / Paints
- Plywood / Engg. Materials | Gold / Silver / Titanium



Interior Size	Exterior	Capacity	Trays	Premium Model
CM	Inch	Litres	Nos	Price
45x45x50	62x89x97	100	2	1,11,200
50x50x60	67x97x120	150	2	1,28,000
50x50x80	67x97x137	200	3	1,49,000
50x50x120	67x97x177	300	3	1,84,000
60x60x120	77x107x179	430	4	2,05,000

Testing Parameters:

- 23°C / 50% RH
- 25°C / 60% RH
- 30°C / 65% RH
- 30°C / 75% RH
- 40°C / 75% RH
- 40°C / 95% RH
- 25°C / 40% RH On Request
- 30°C / 35% RH On Request