COMP 4621
Computer Communications and Networks

Spring 2018

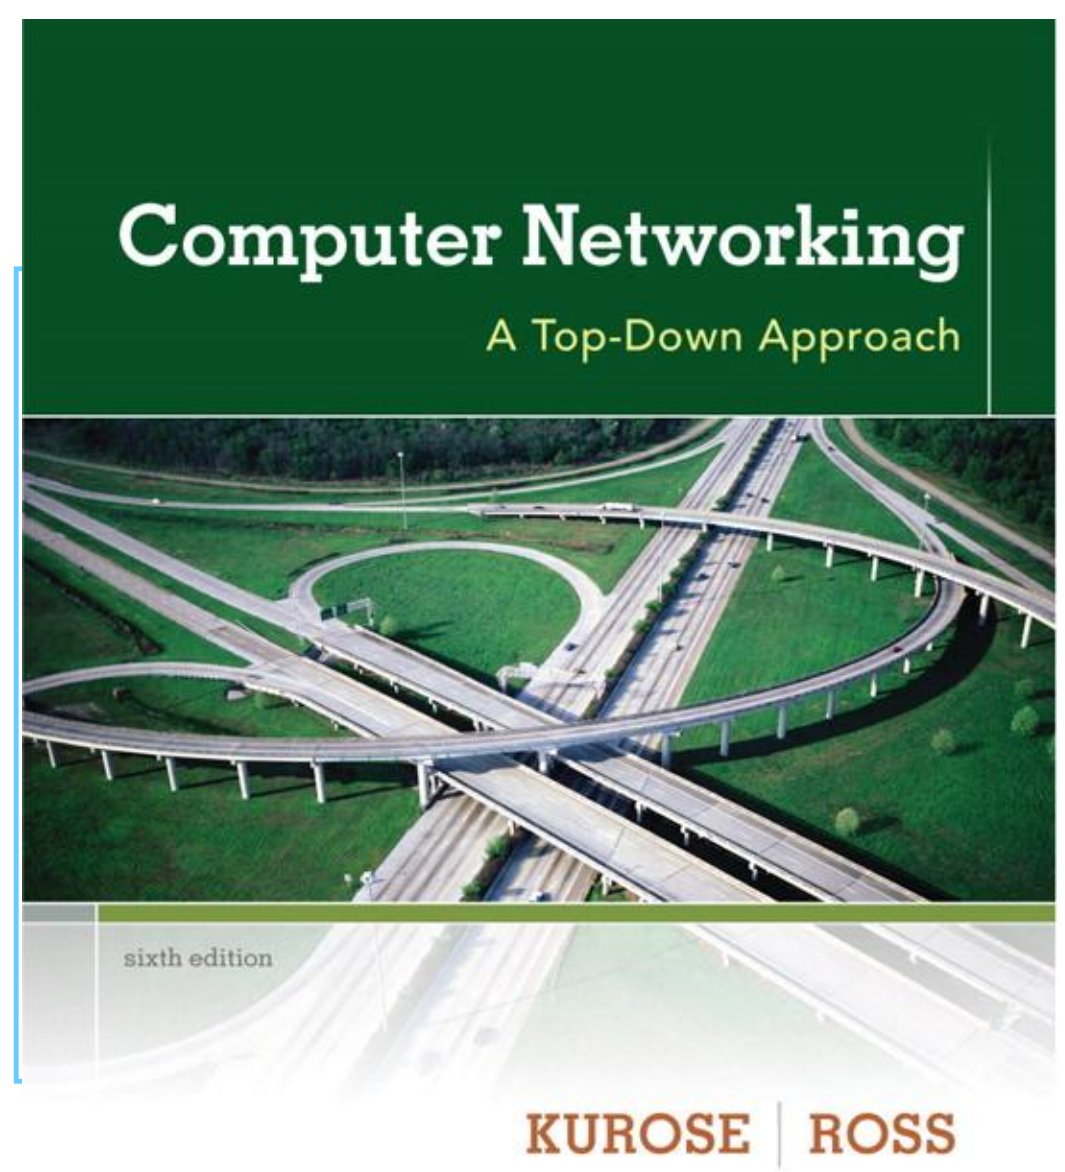

Lectures and Tutorials

- L-1
  - Instructor: Kai Chen, http://www.cse.ust.hk/~kaichen/
  - Lectures: Wed and Fri 1:30 pm – 2:50 pm
  - Venue: Room 2503, Lift 25-26
  - TA: Jiacheng Xia, Junxue Zhang

- Web site: http://course.cs.ust.hk/comp4621/

Lectures and Tutorials

- Lecture notes and tutorial materials
  - Download course materials before class
  - Homework and programming assignment will be put online

- Tutorial and Lab will start in week #4

  - Lab 1 Monday 12:30 am - 1:20 pm   Room 4214

Textbook

Computer Networking: A Top-Down Approach
James Kurose and Keith Ross, Pearson (6th Ed.)

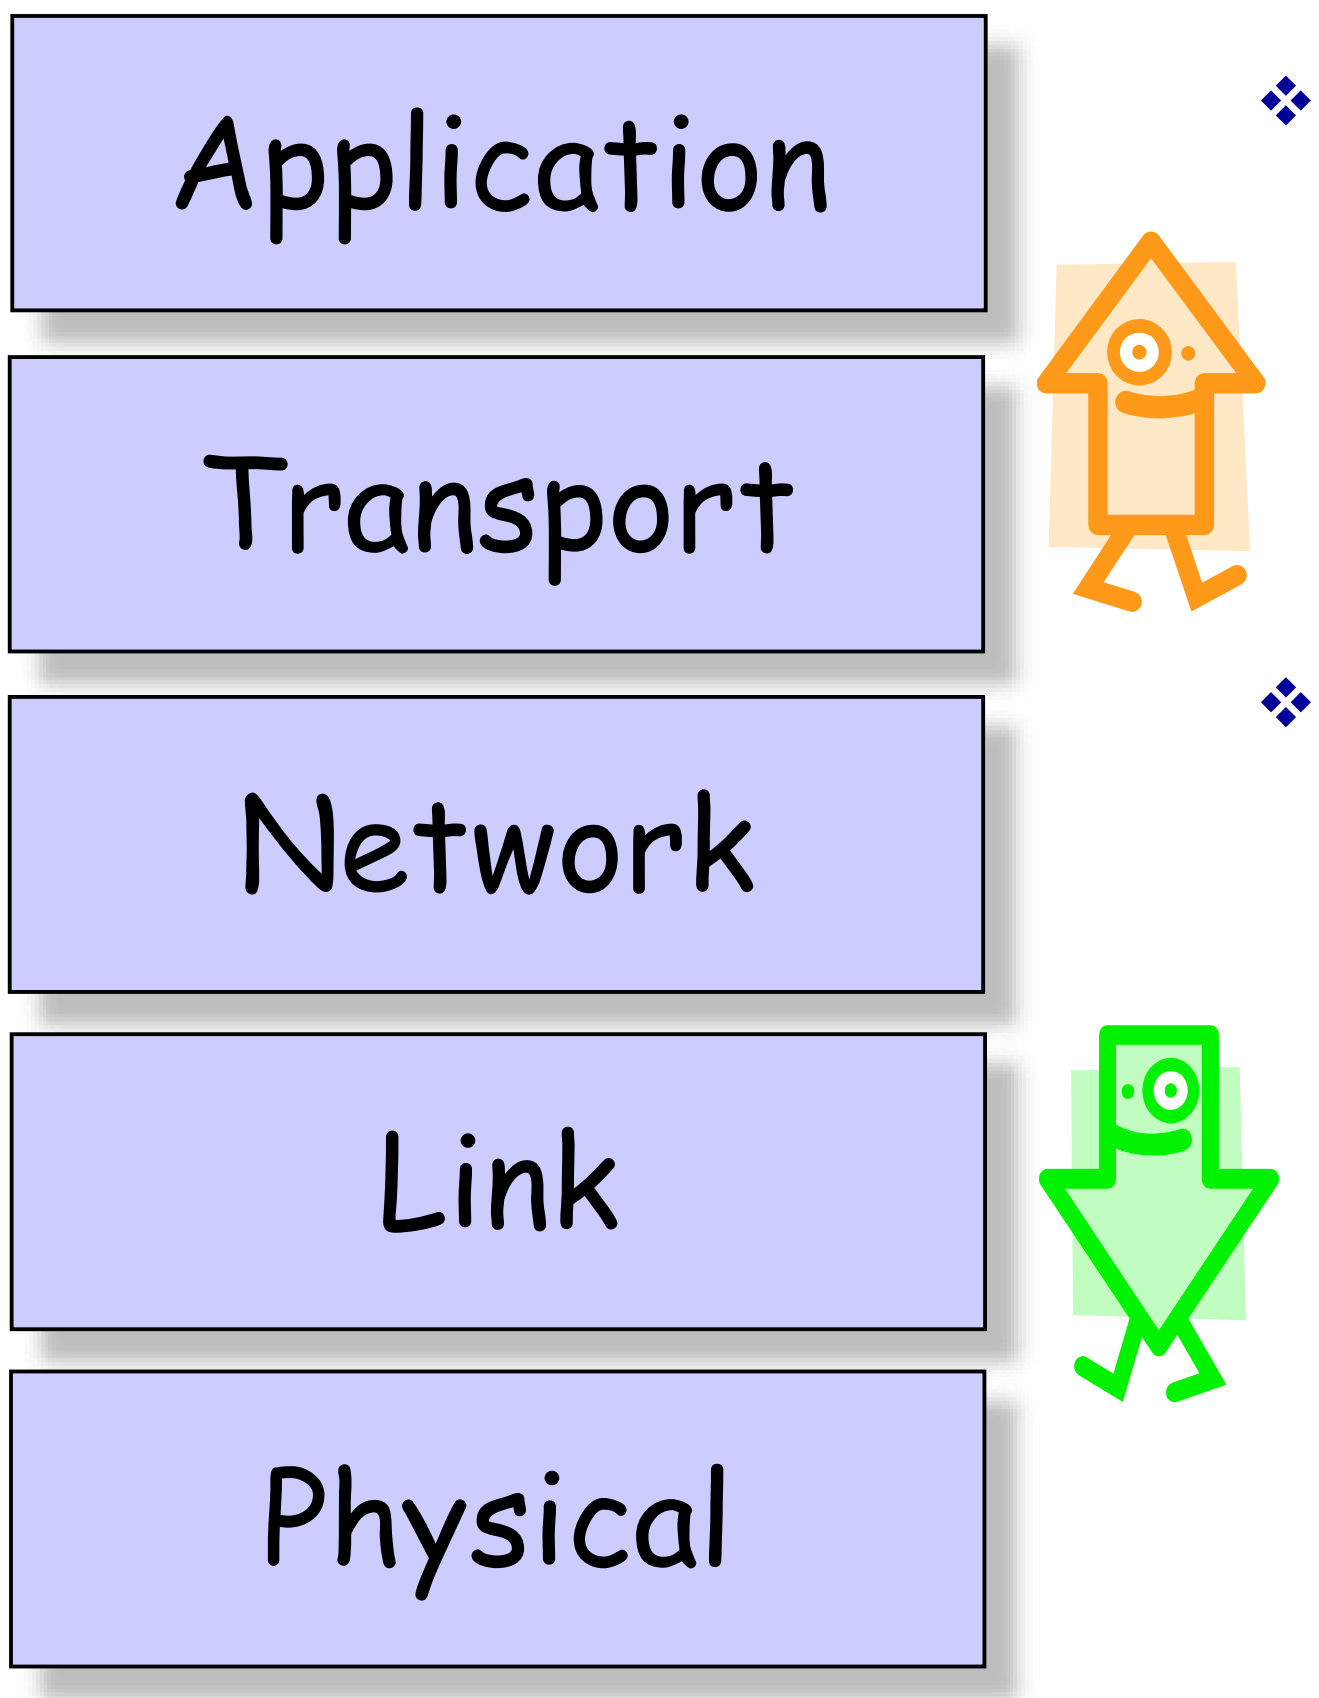

- **Bottom Up**: Start with physical (e.g., wires) layer and move up to applications (e.g., mail, web browsers) layer explaining how functions are implemented
- **Top Down** : Start with Application layer and move down to Physical layer, explaining what expectations from applications, and how such services are implemented

Grading Scheme

- Grading is based on
  - Four Written Assignments – 20% (5% each)
  - One Programming Assignment – 15%
  - Midterm Examination - 25%
  - Final Examination - 40%

Conduct in the Classroom

1. Please try to be on time to class
2. Please do not talk while in class except to raise questions
3. No eating/drinking
4. Phone – Silent mode



Plagiarism Policy

- There are differences between collaborations or discussions and copy!

- 1st Time: all involved get ZERO marks, and reported to ARR
- 2nd Time: need to terminate (Fail grade)
- Midterm or Final exam: an automatic FAIL

Course Prerequisite

- COMP3511 OS or equivalent
  - Process and thread, DMA and interrupt, inter-process communications
- Programming
  - UNIX environment
  - C/C++ programming

Lecture Format

- Lectures:
  - Lecture notes are available before class
  - It is important to attend the lectures (because not all materials and concepts are covered in slides)
  - Learn from textbook

- Tutorials
  - Supplement the lectures with more examples
  - Socket programming and project

- Reading the corresponding materials in the textbook
  - Slides do not cover everything

- Chapter or sub-chapter summary
  - These will be put online at the end of each chapter

Assignments

- Written assignments
  - Due by time specified
  - Re-grade requests will only be entertained within **one** week after the homework are handed back
  - Late policy: 15% reduction, only one day delay is allowed.

- Programming assignment
  - Individual projects
  - Due by time specified
  - Run on Unix and submit it using CASS
  - Re-grade policy will be announced
  - Late policy : 15% reduction, only one day delay is allowed.

Examination Schedules

- Midterm Exam
  - **Apr 11, 2018 (Wed), 1:30 pm – 2:50 pm**
  - **Venue: 2503 (in class)**
- Final Exam
  - To be determined (TBD)
- All exams are closed-book

- No make-up exams will be given except
  - under very special circumstances, e.g., sickness, with letters of proof.
  - Instructors MUST BE informed beforehand

Tips for Learning

- Attend lectures
  - Download lecture notes prior to lectures
  - Important concepts are explained
- Complete homework alone
  - This is an exercise to test your knowledge
- Spend 30 minutes each week to review the content
  - Chapter summary can help to review
  - You can not expect to learn everything two days before exams no matter how smart you are ☺
  - Knowledge is accumulated incrementally
- Start your project earlier
  - Have a plan for the project
- Raise questions!
  - Do not delay your questions until prior to exams

Course Outline

- Introduction (1-2 weeks)
  - Internet, network edge and core, performance
- Application Layer (2-3 weeks)
  - Web, HTTP, E-mail and SMTP
  - DNS, Peer-to-Peer applications, socket programming
- Transport Layer (3-4 weeks)
  - UDP and TCP
  - Principles of congestion control, TCP congestion control
- Network Layer (3-4 weeks)
  - Virtual circuit, datagram, router, IP
  - Routing protocols
- Link Layer and Local Area Network (1-2 weeks)
  - MAC, addressing
  - Ethernet and link-layer switch

Chapter 1: introduction

our goal:

- get "feel" and terminology
- more depth, detail *later* in course
- approach:
  - use Internet as example

overview:

- what's the Internet?
- what's a protocol?
- network edge; hosts, access net, physical media
- network core: packet/circuit switching, Internet structure
- performance: loss, delay, throughput
- protocol layers, service models

Chapter 1: roadmap

1.1 what *is* the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

What's the Internet: "nuts and bolts" view

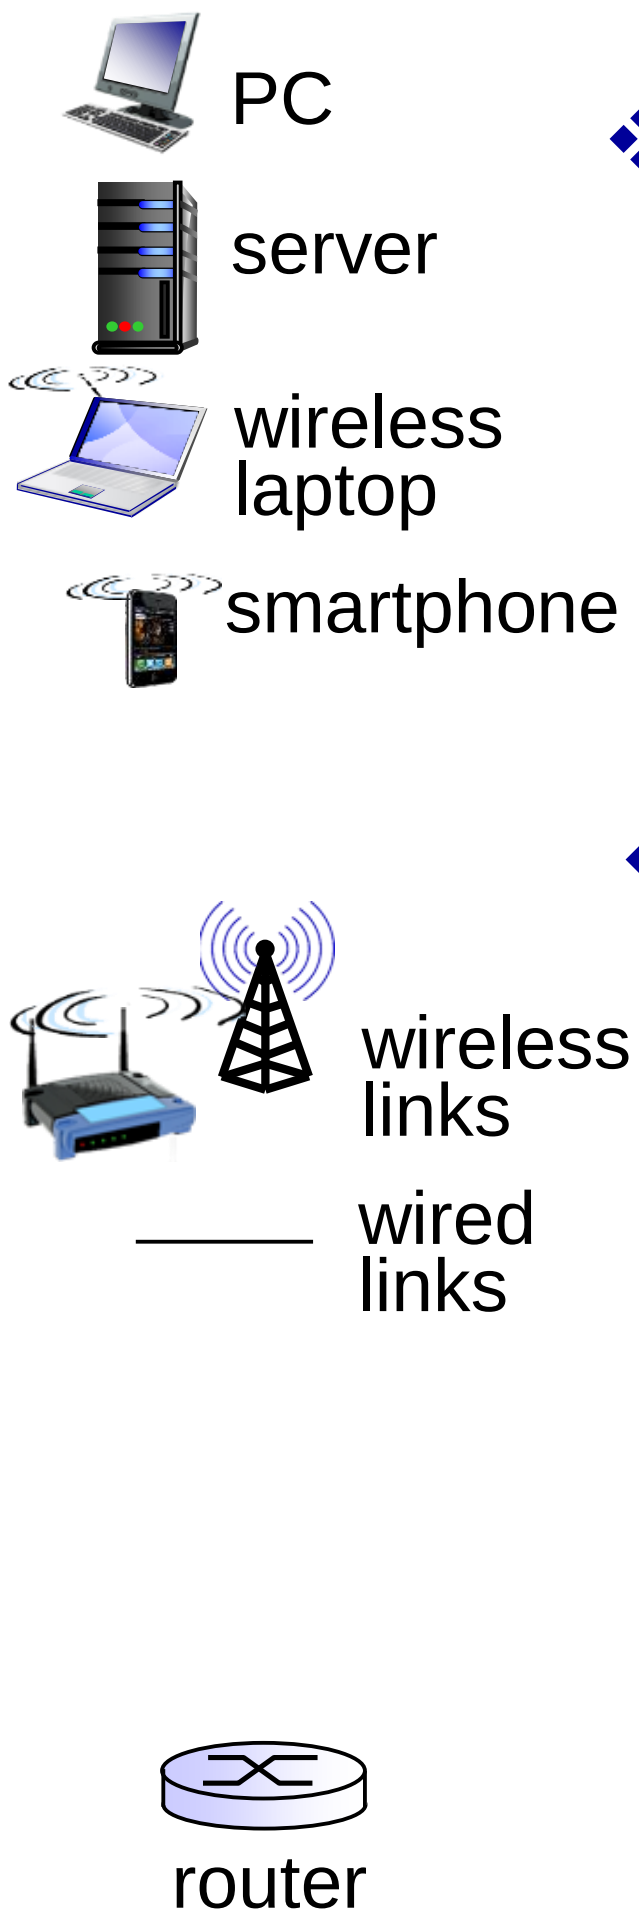

- millions of connected computing devices:
  - *hosts* = *end systems*
  - running *network apps*

- *communication links*
  - fiber, copper, radio, satellite
  - transmission rate: *bandwidth*

- *Packet switches:* forward packets (chunks of data)
  - *routers* and *switches*

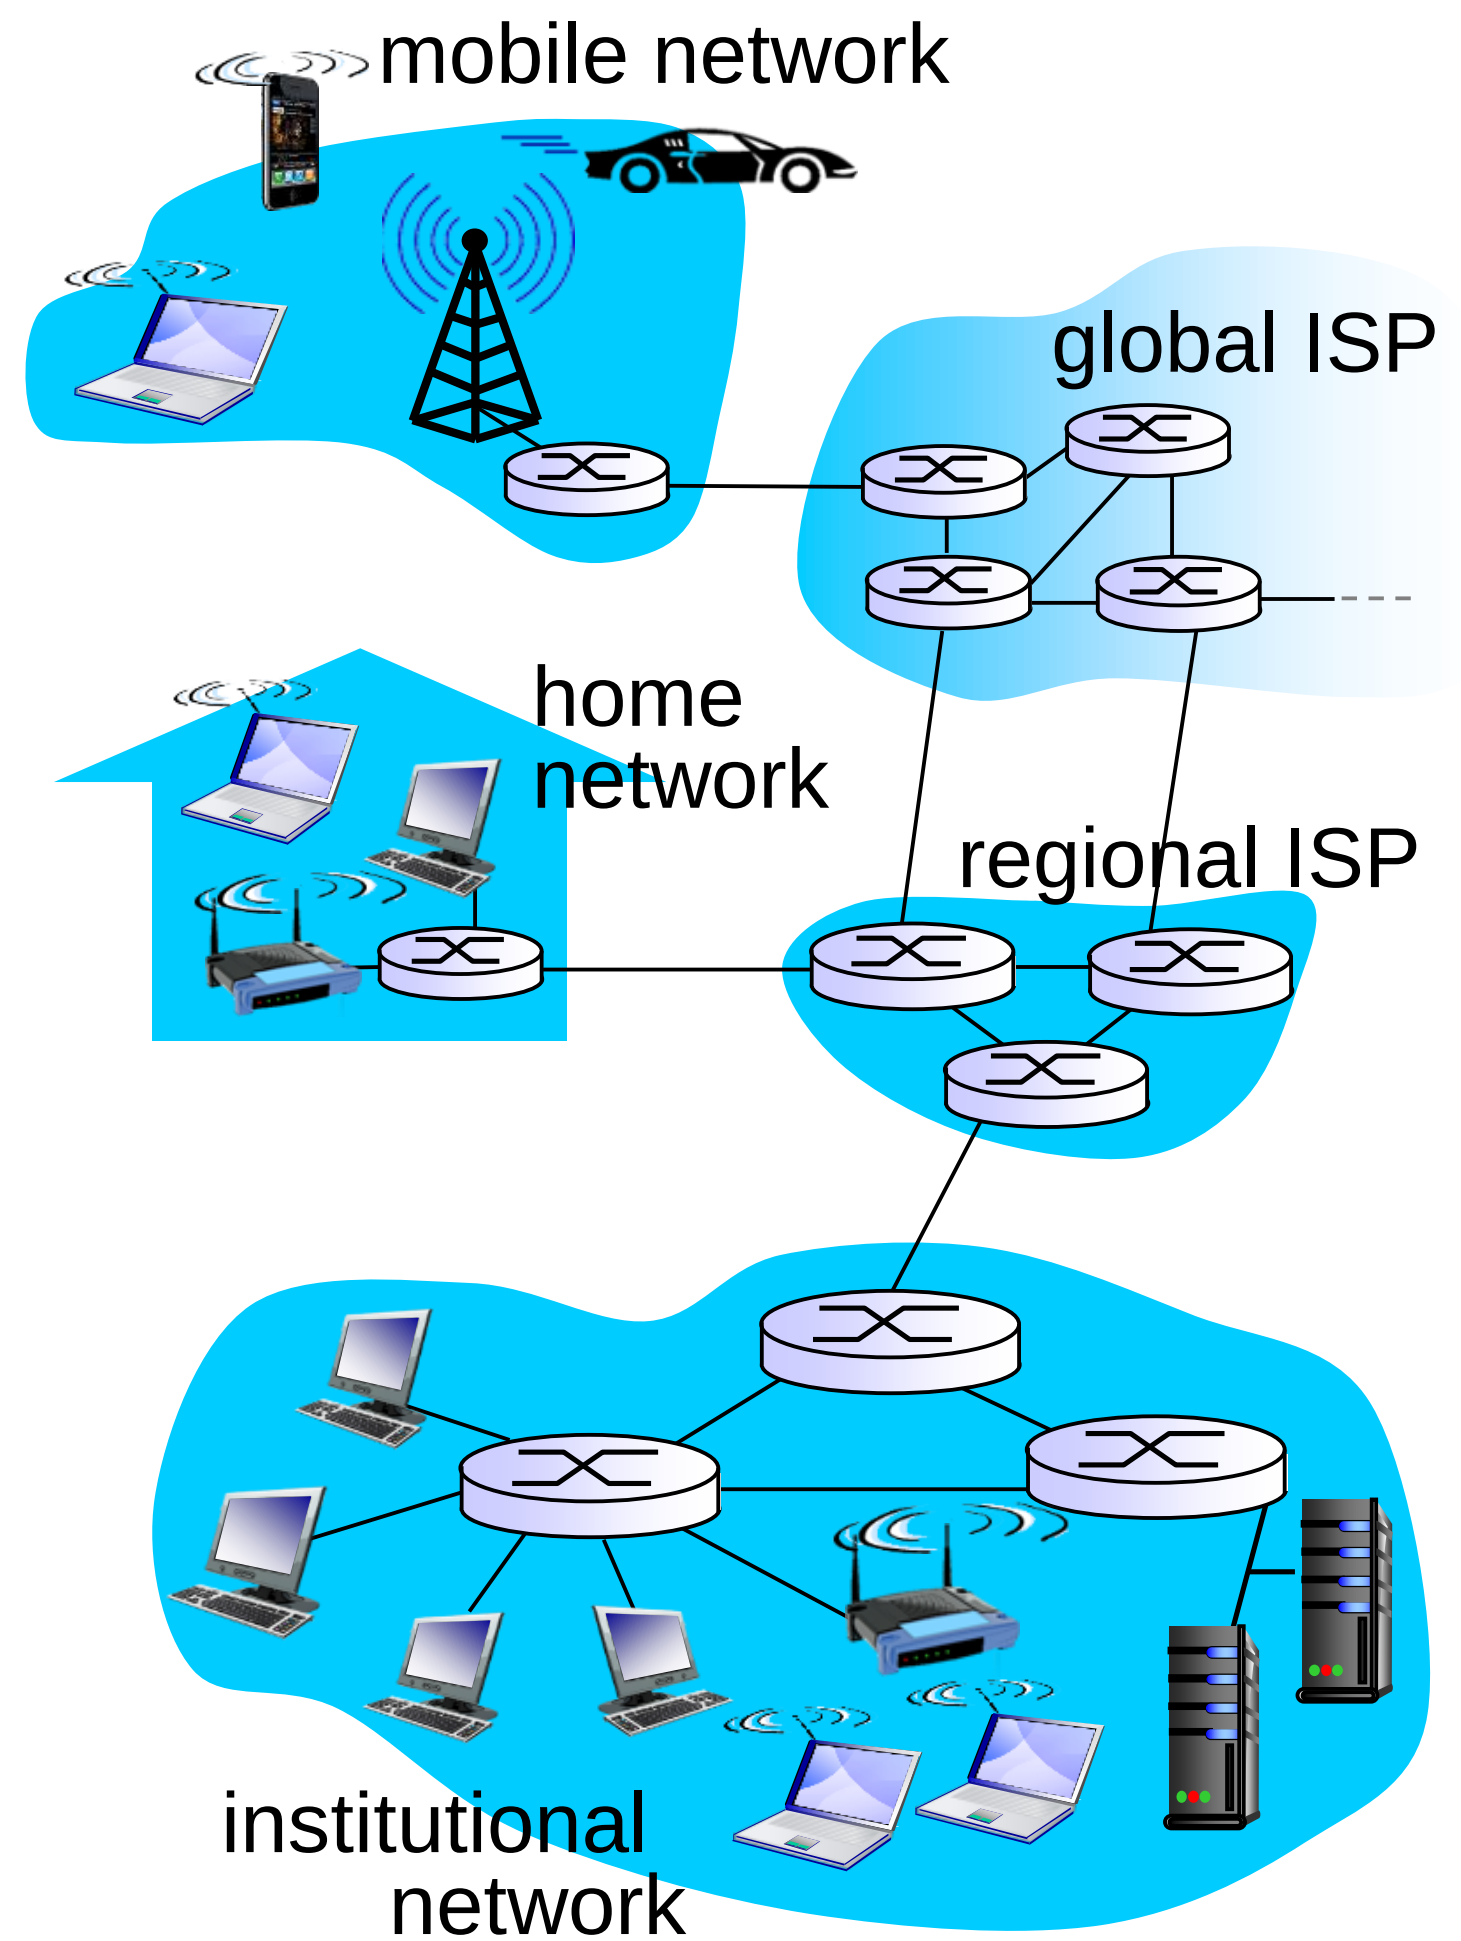

What's the Internet: "nuts and bolts" view

- *Internet: "network of networks"*
  - Interconnected ISPs
- *protocols* control sending, receiving of msgs
  - e.g., TCP, IP, HTTP, Skype, 802.11
- *Internet standards*
  - RFC: Request for comments
  - IETF: Internet Engineering Task Force

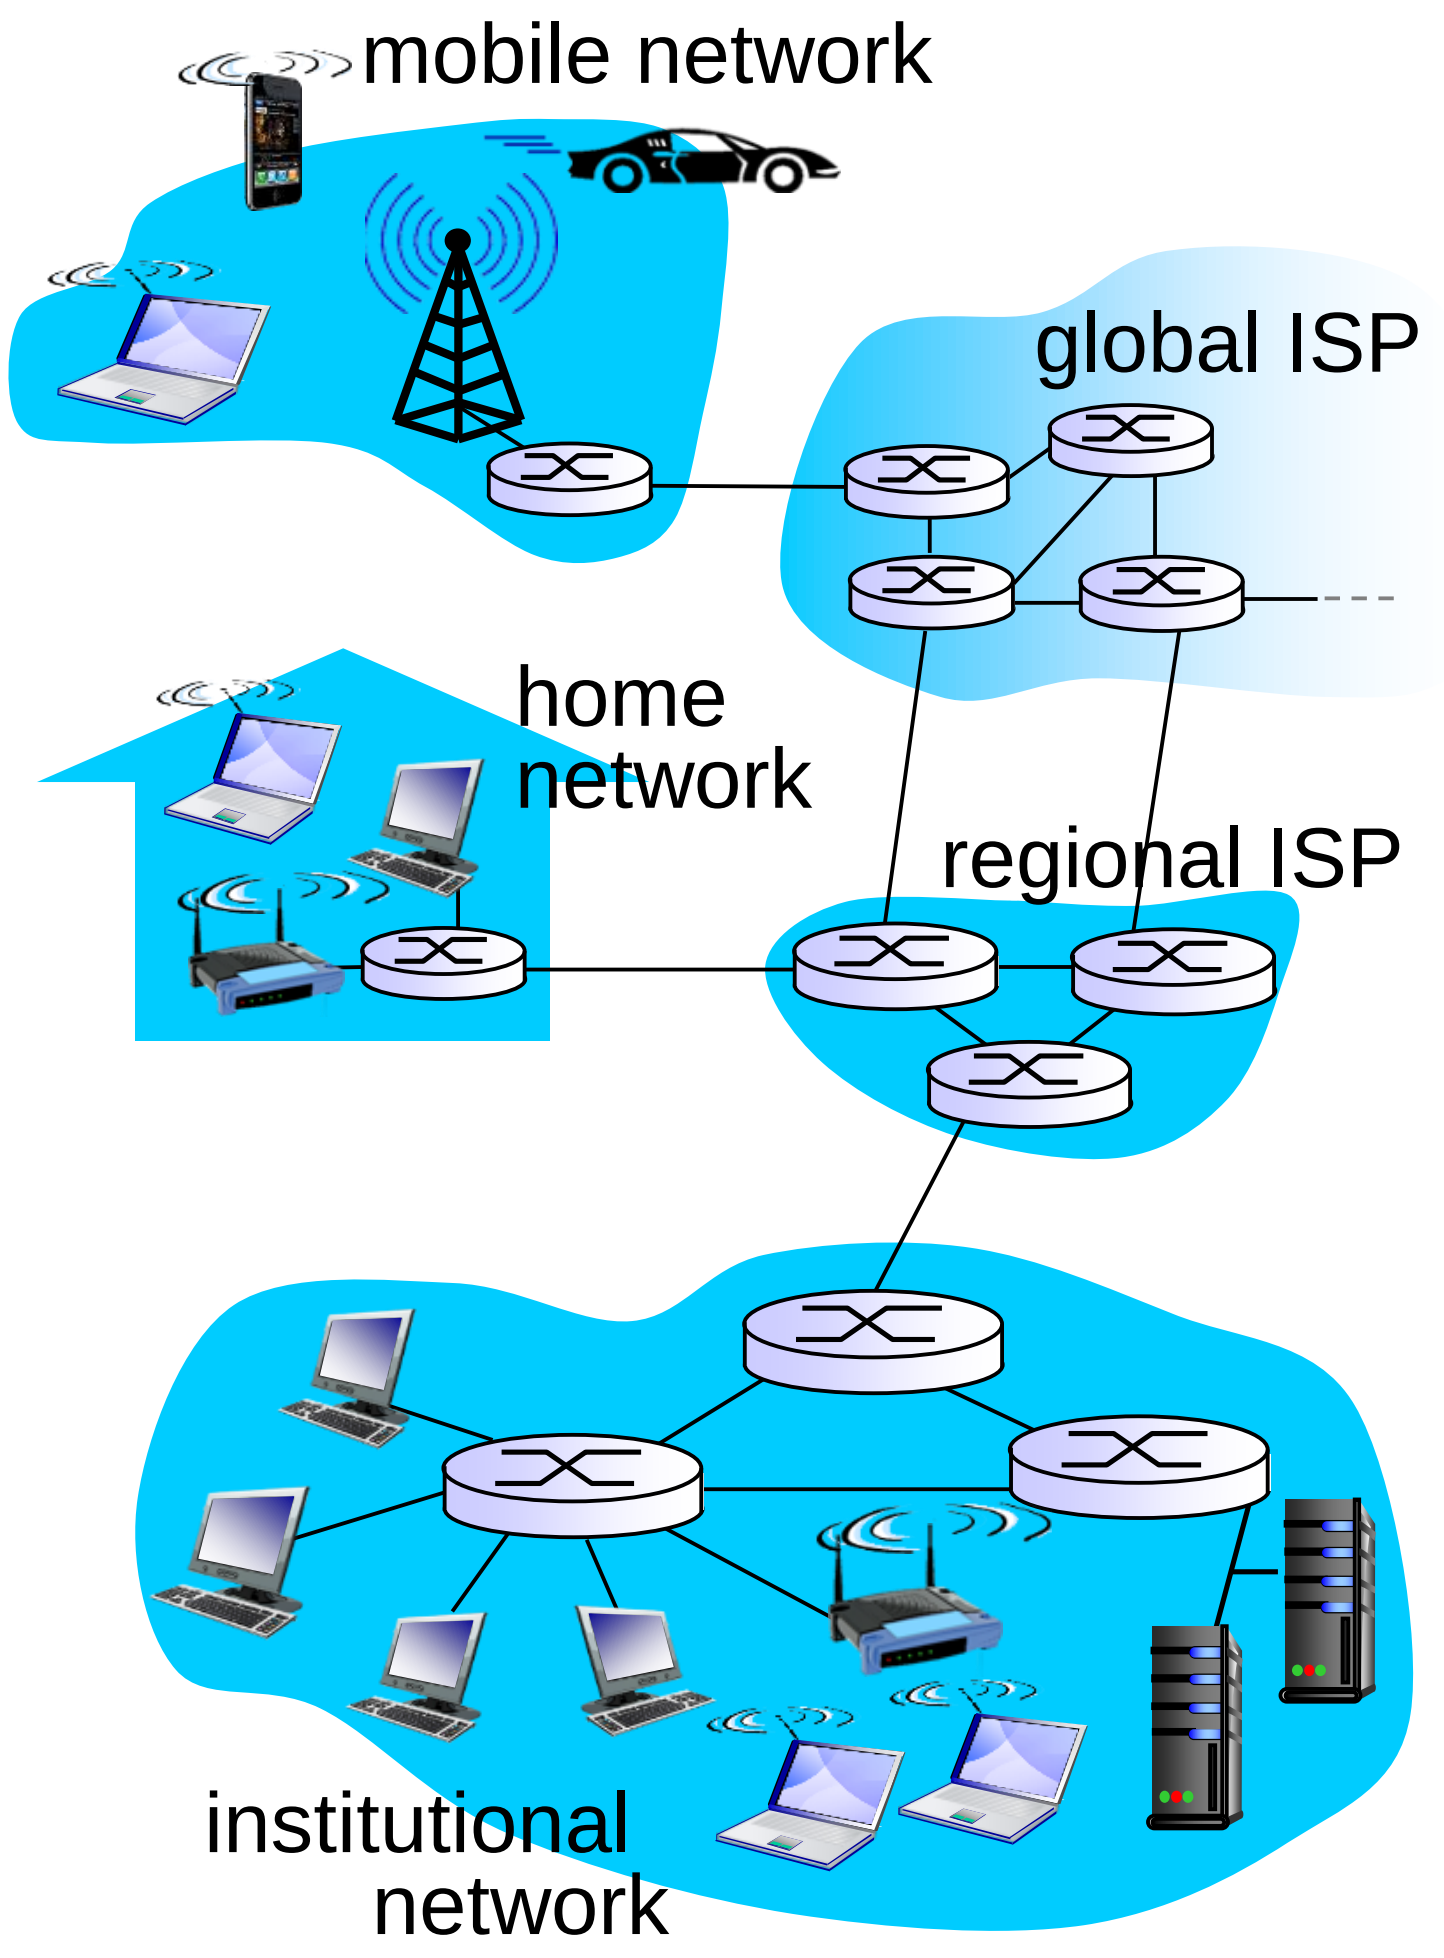

What's the Internet: a service view

- *Infrastructure that provides services to applications:*
  - Web, VoIP, email, games, e-commerce, social nets, …
- *provides programming interface to apps*
  - hooks that allow sending and receiving app programs to "connect" to Internet
  - provides service options, analogous to postal service

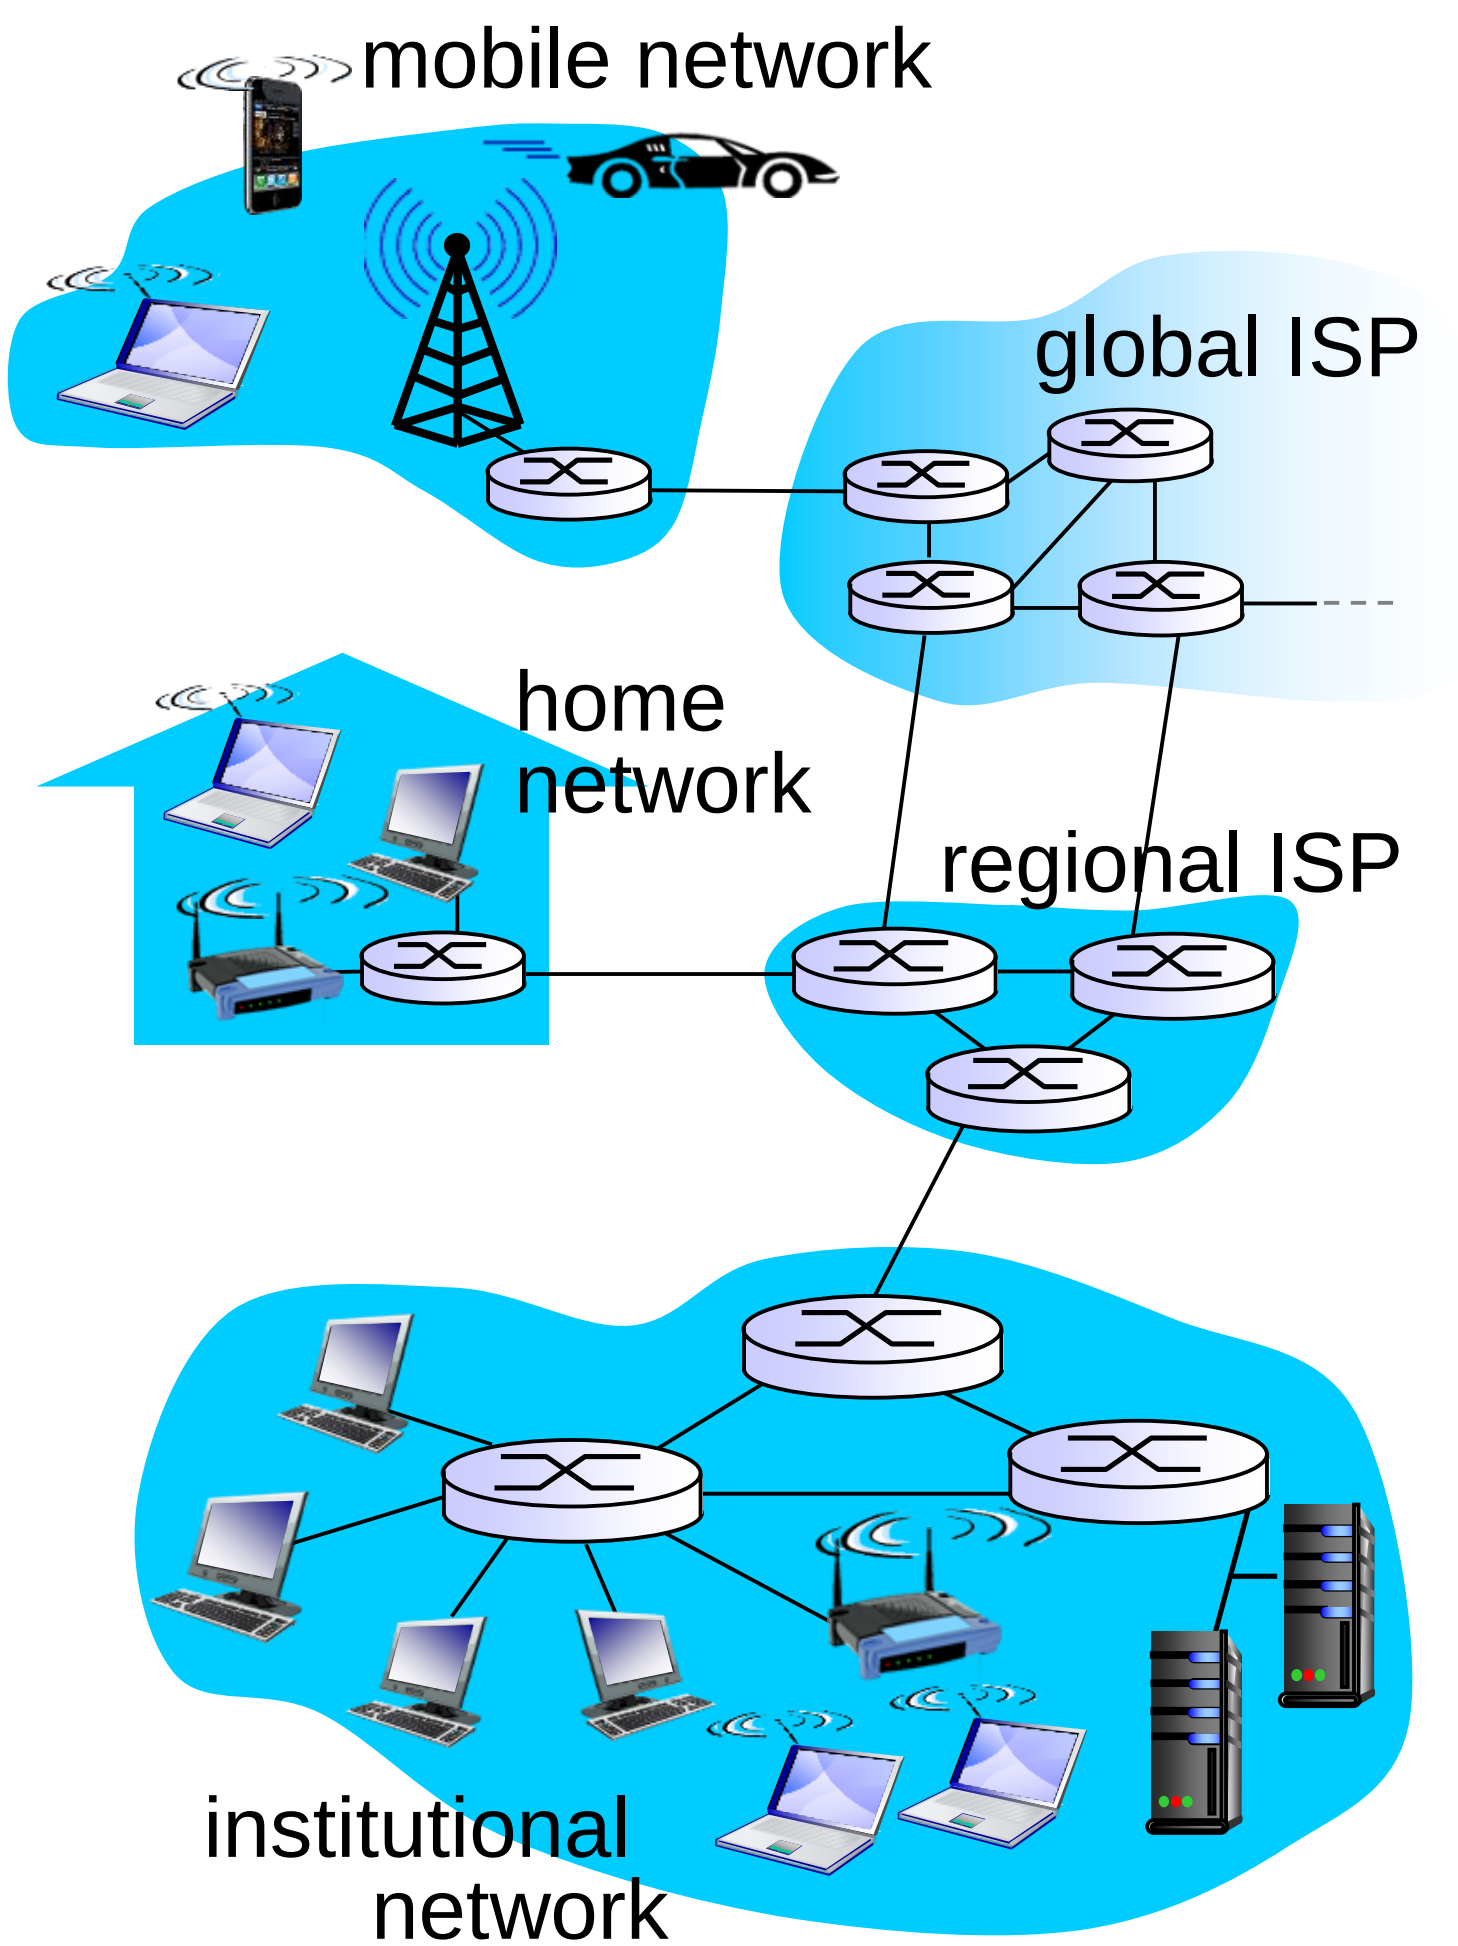

What's a protocol?

human protocols:

- "what's the time?"
- "I have a question"
- introductions

… specific msgs sent

… specific actions taken when msgs received, or other events

network protocols:

- machines rather than humans
- all communication activity in Internet governed by protocols

protocols define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt

What’s a protocol?

a human protocol and a computer network protocol:

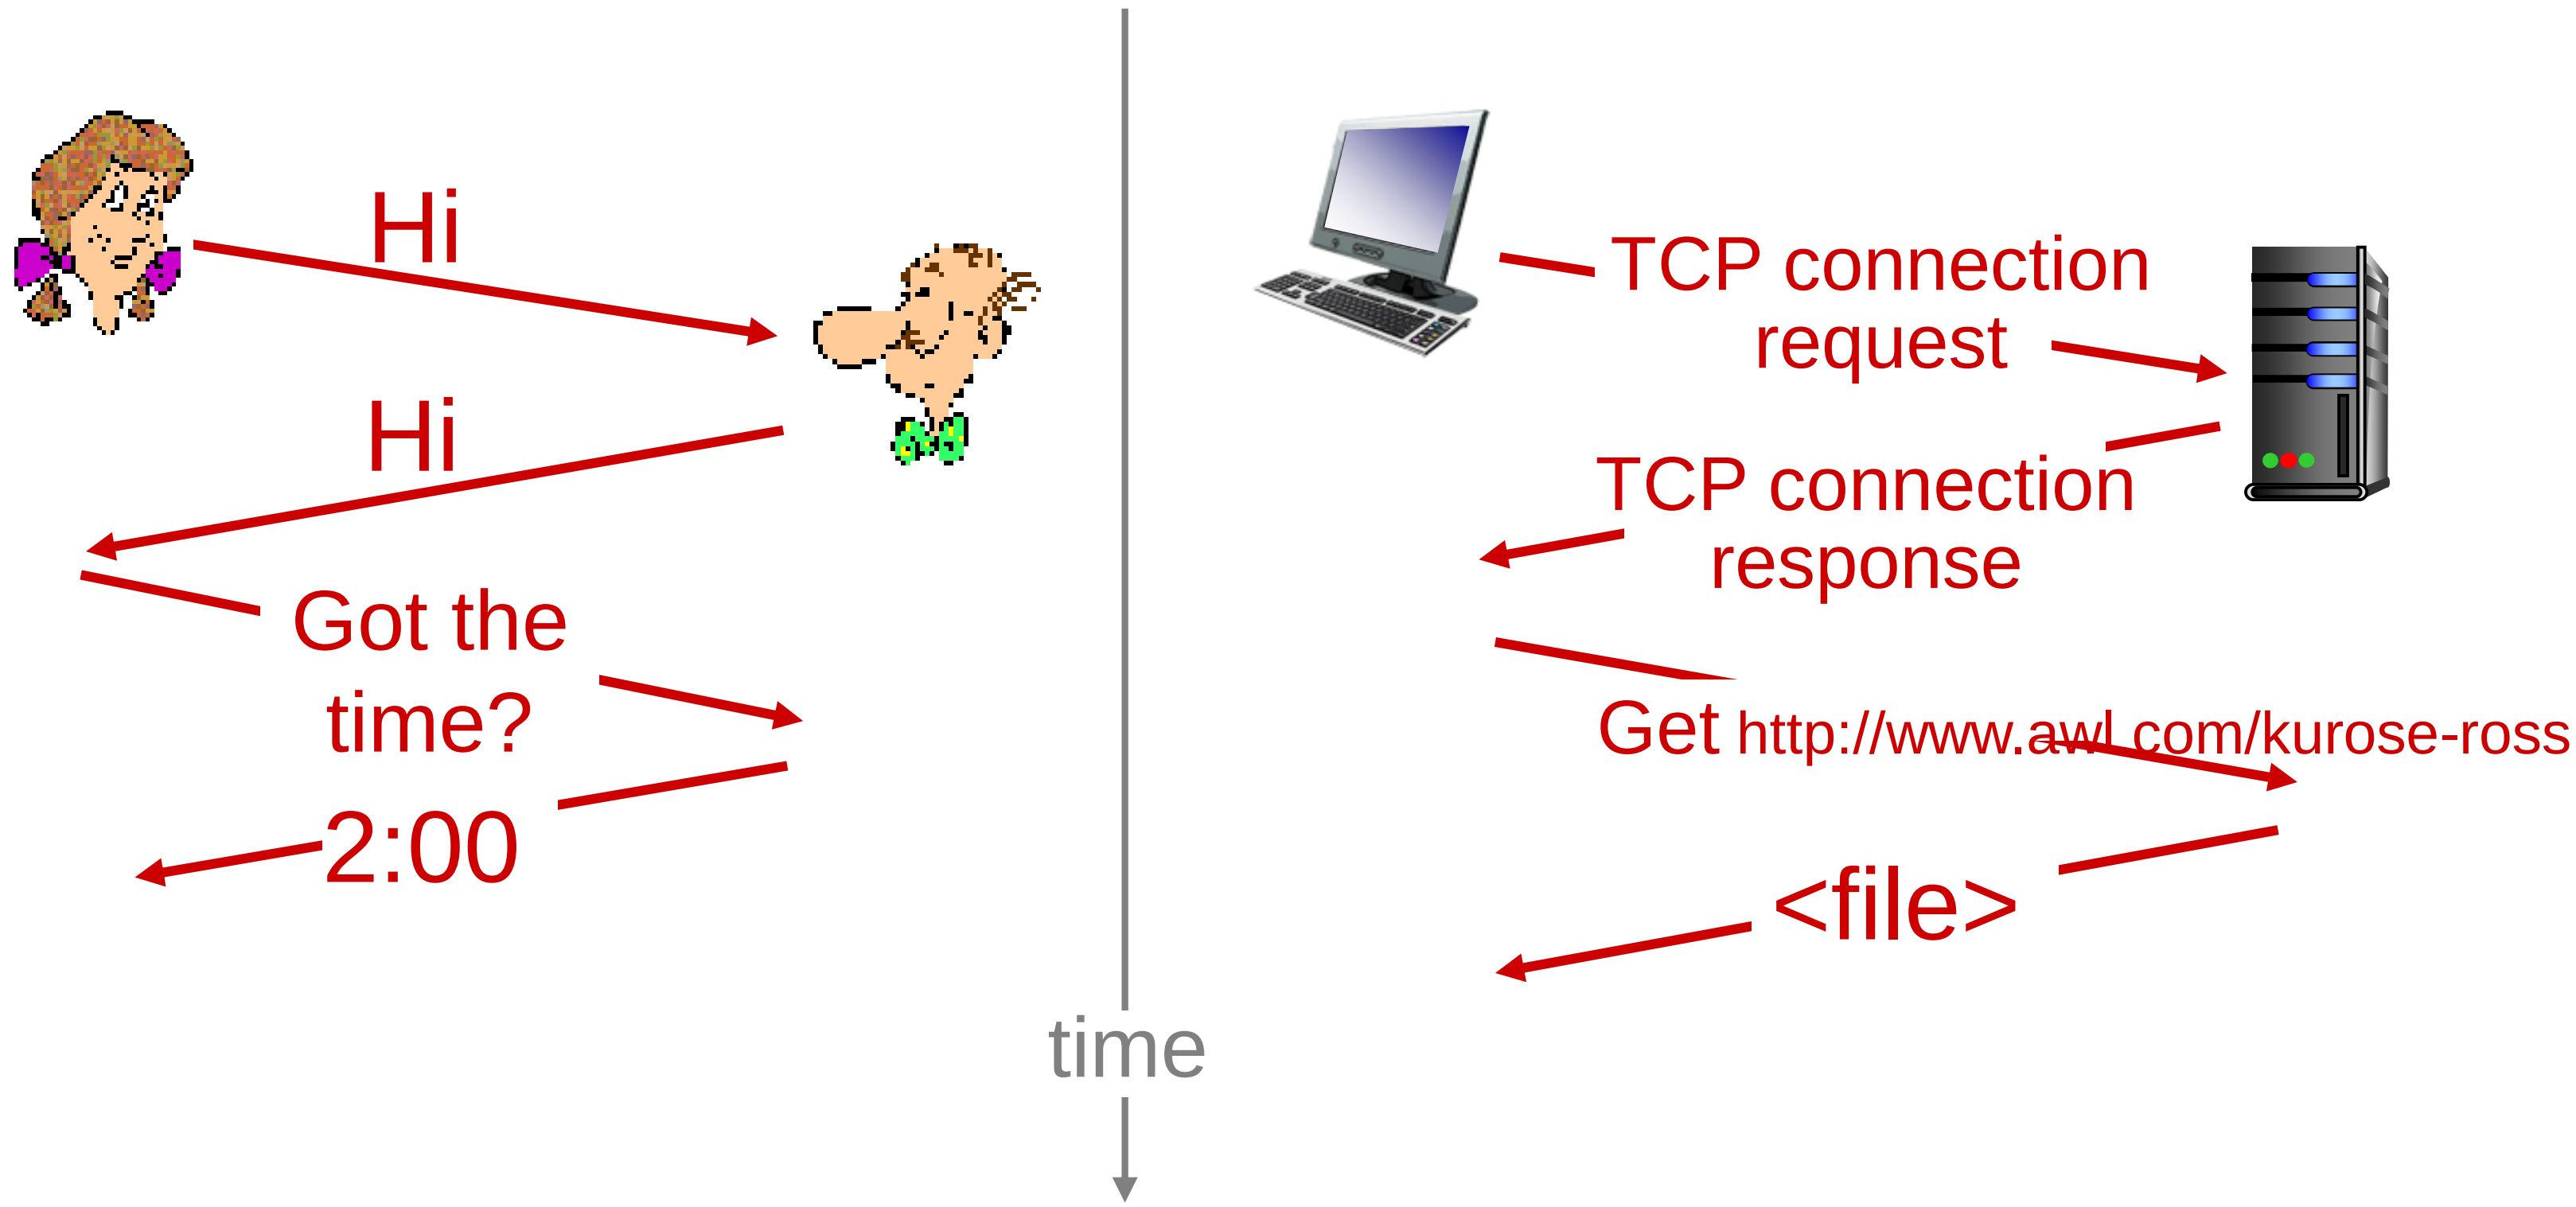

Q: other human protocols?

Chapter 1: roadmap

1.1 what *is* the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

A closer look at network structure:

- *network edge:*
  - hosts: clients and servers
  - servers often in data centers
- *access networks, physical media:* wired, wireless communication links
- *network core:*
  - interconnected routers
  - network of networks

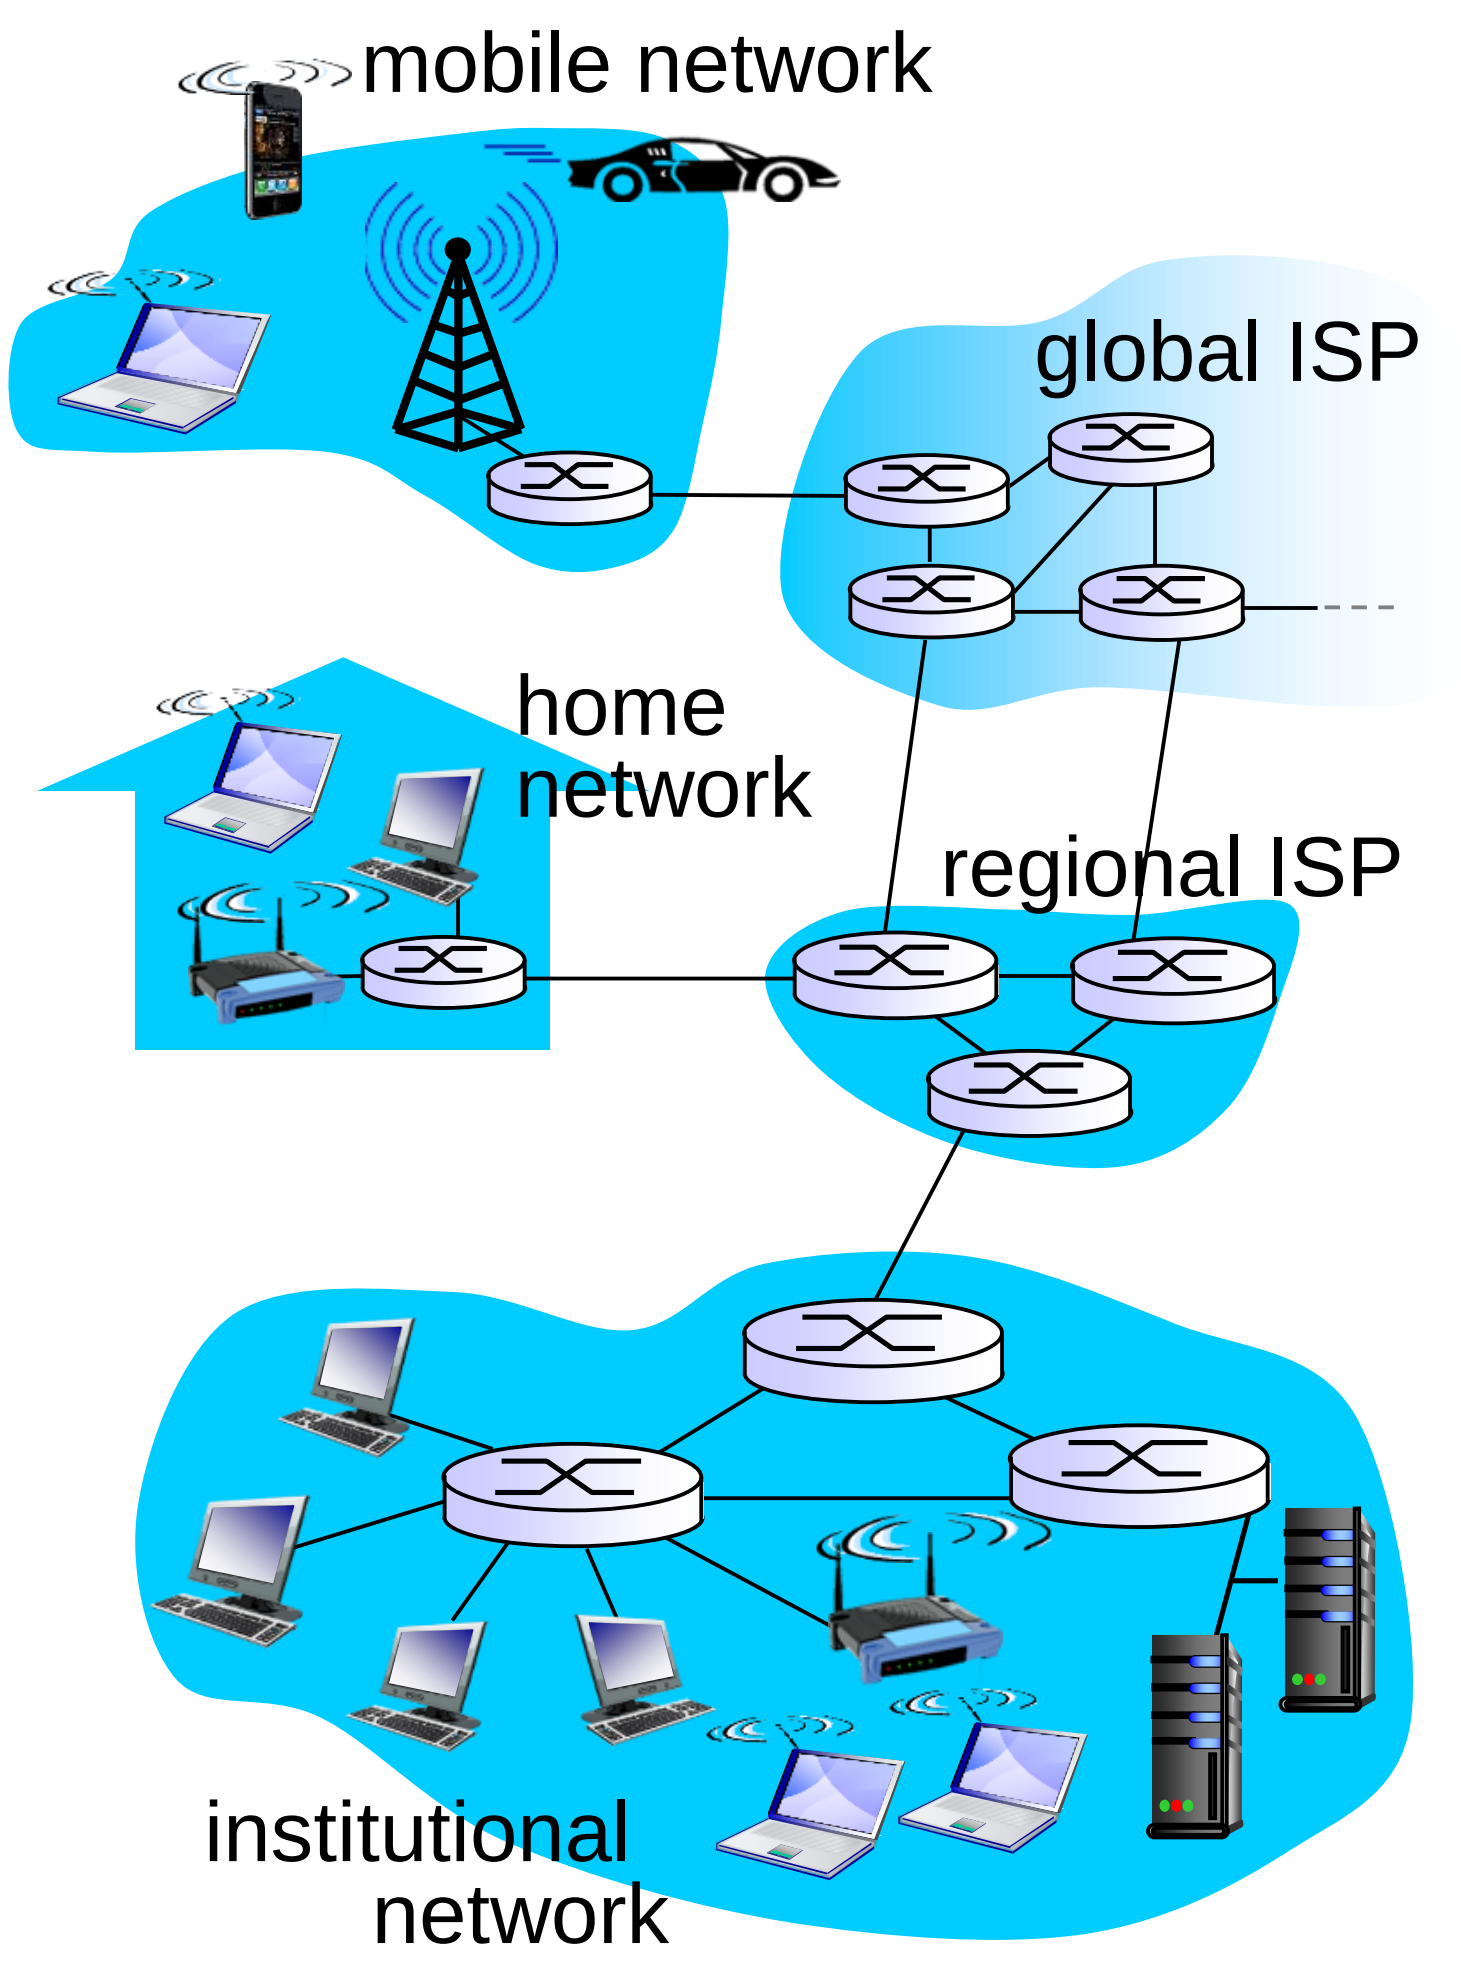

Host: sends *packets* of data

host sending function:

- takes application message
- breaks into smaller chunks, known as *packets*, of length *L* bits
- transmits packet into access network at *transmission rate R*
  - link transmission rate, aka link *capacity, aka link bandwidth*

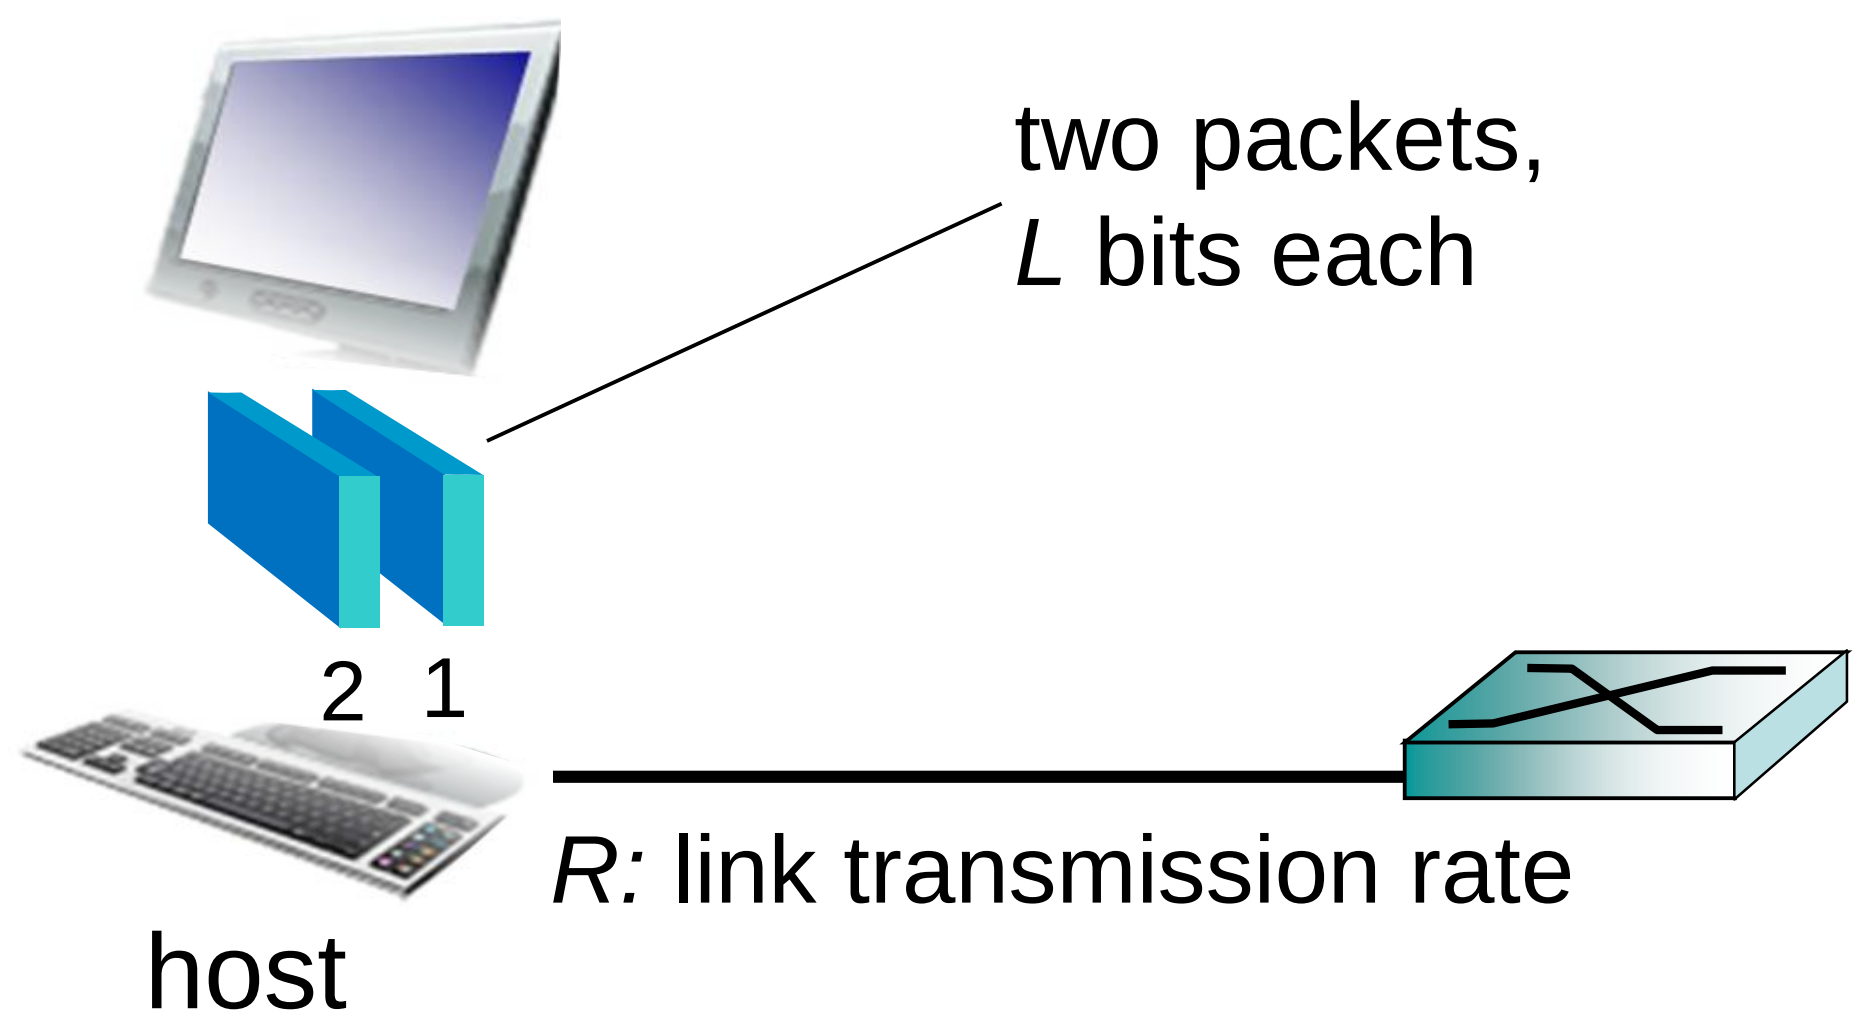

$$\text{packet transmission delay} = \text{time needed to transmit } L\text{-bit packet into link} = \frac{L \text{ (bits)}}{R \text{ (bits/sec)}}$$

Access networks and physical media

Q: How to connect end systems to edge router?

- residential access nets
- institutional access networks (school, company)
- mobile access networks

keep in mind:

- bandwidth (bits per second) of access network?
- shared or dedicated?

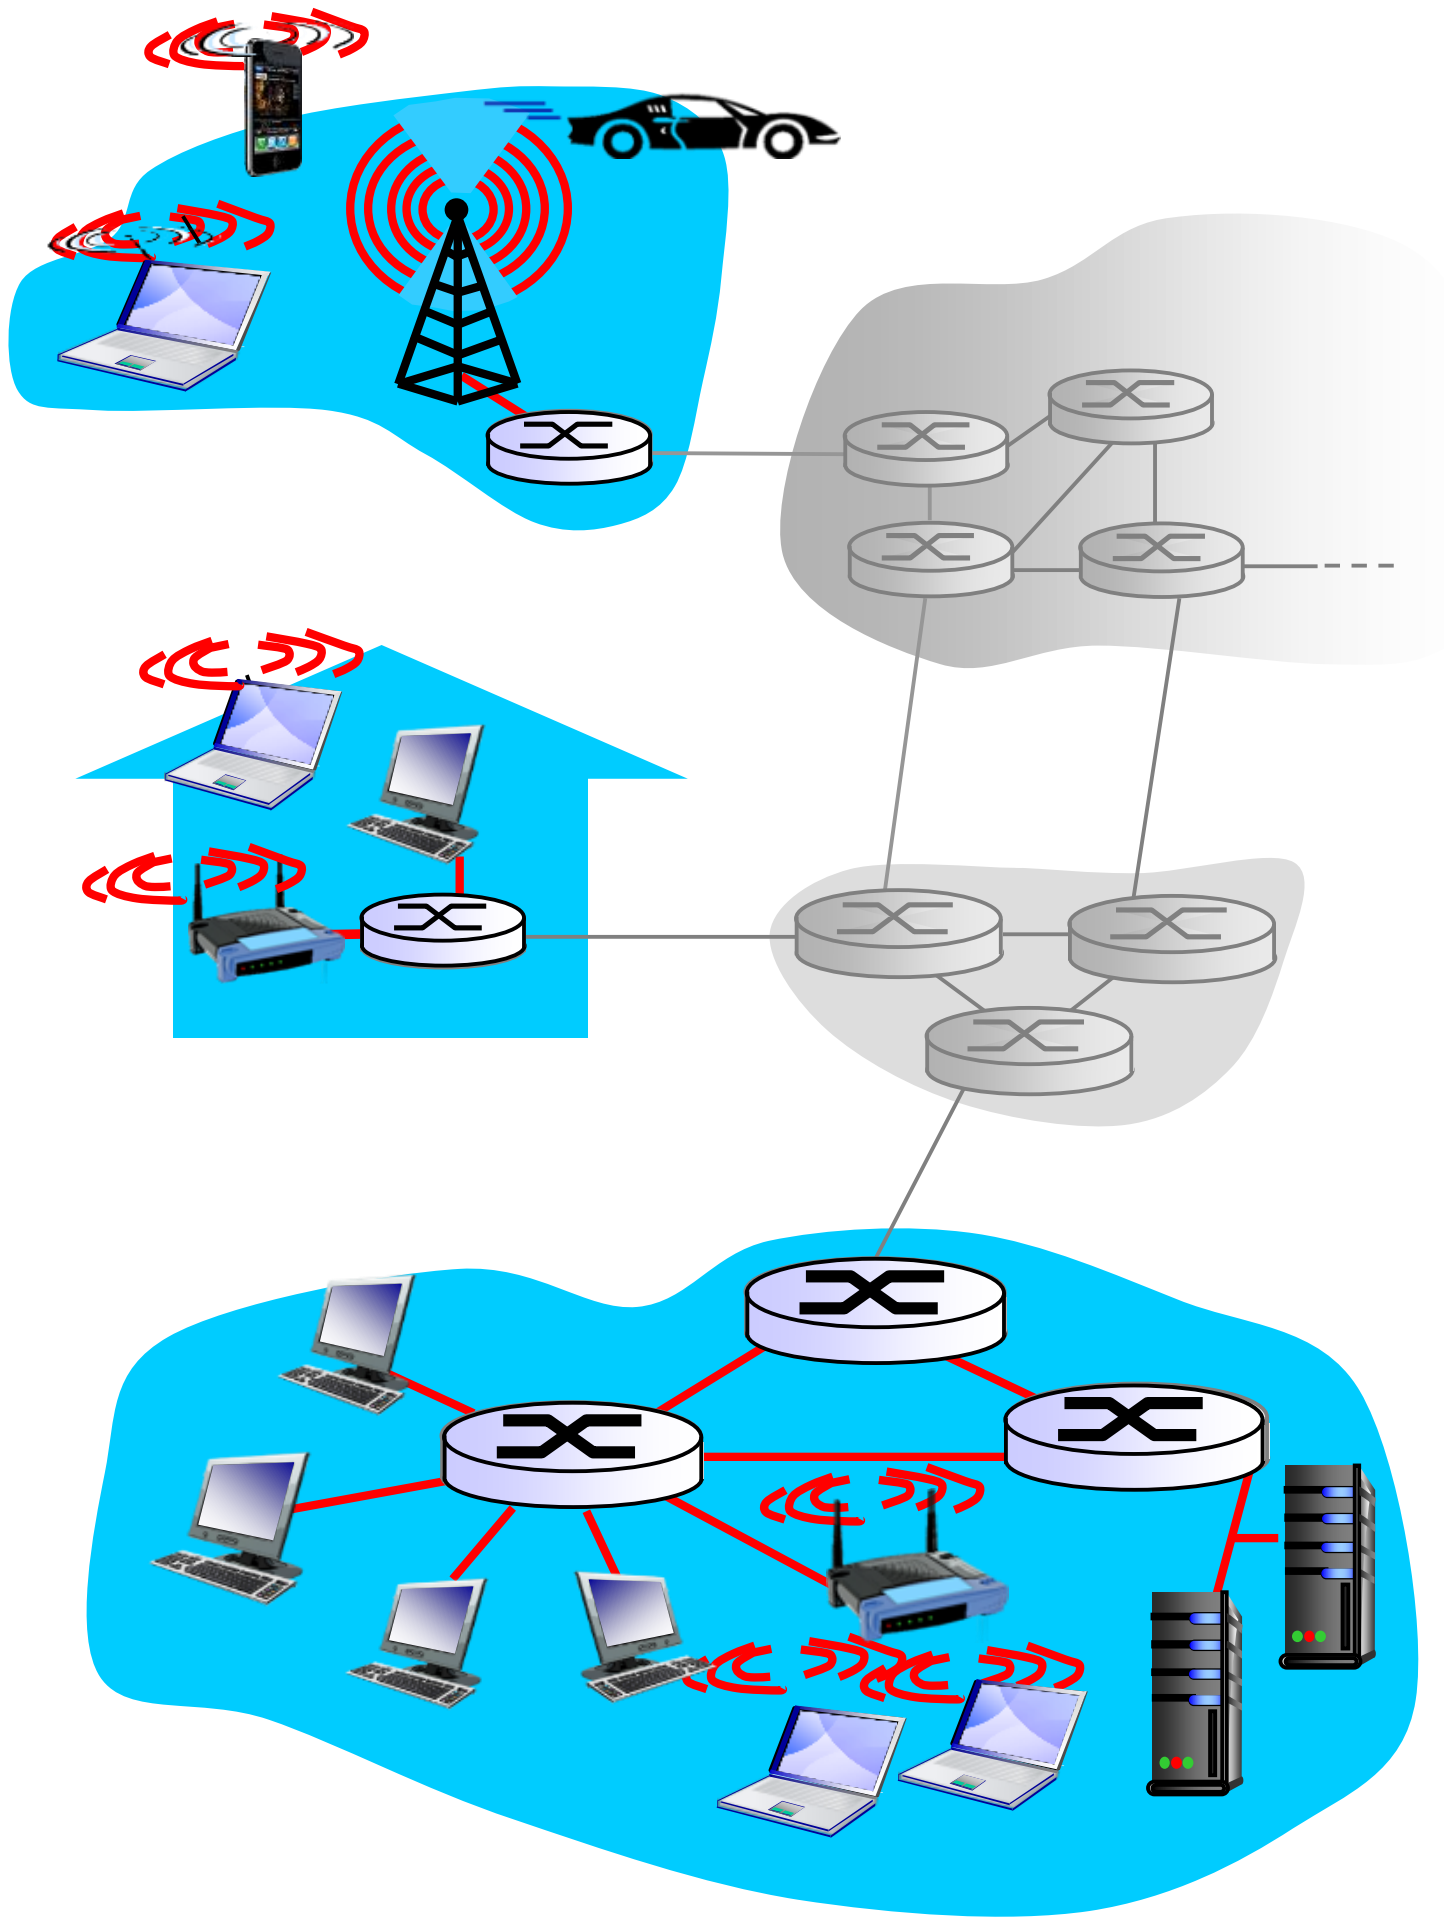

Access net: home network

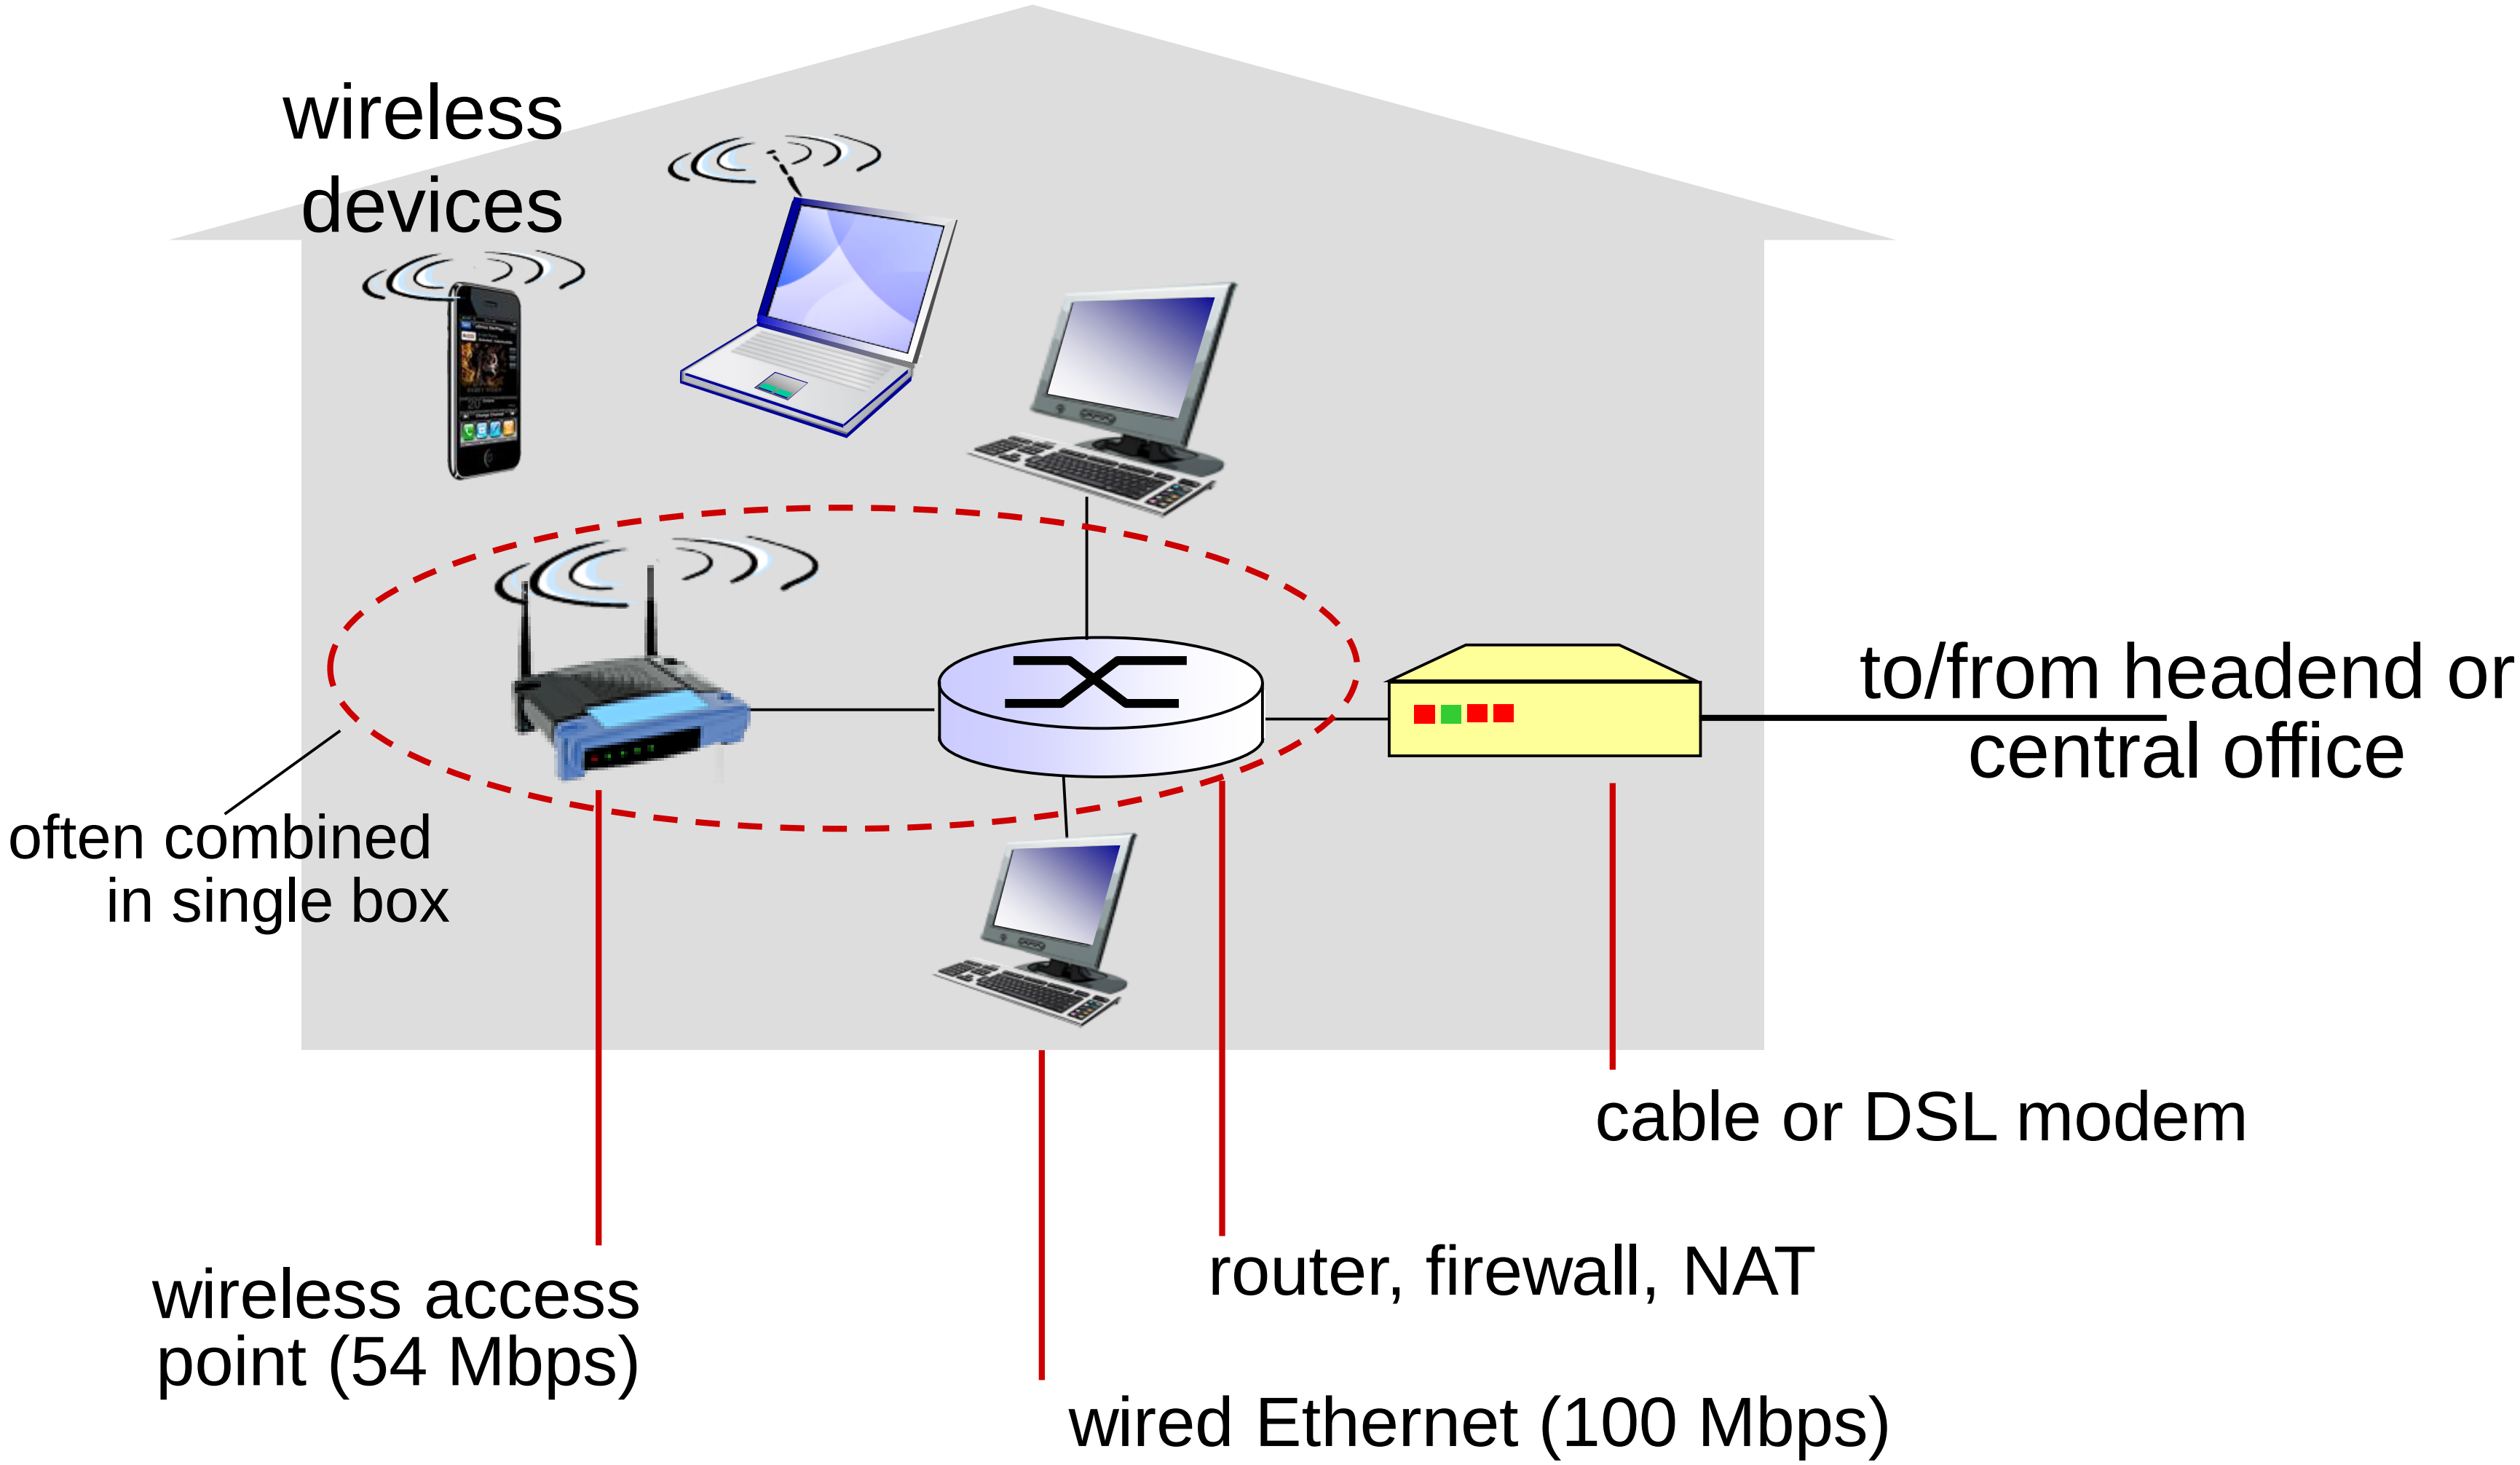

Enterprise access networks (Ethernet)

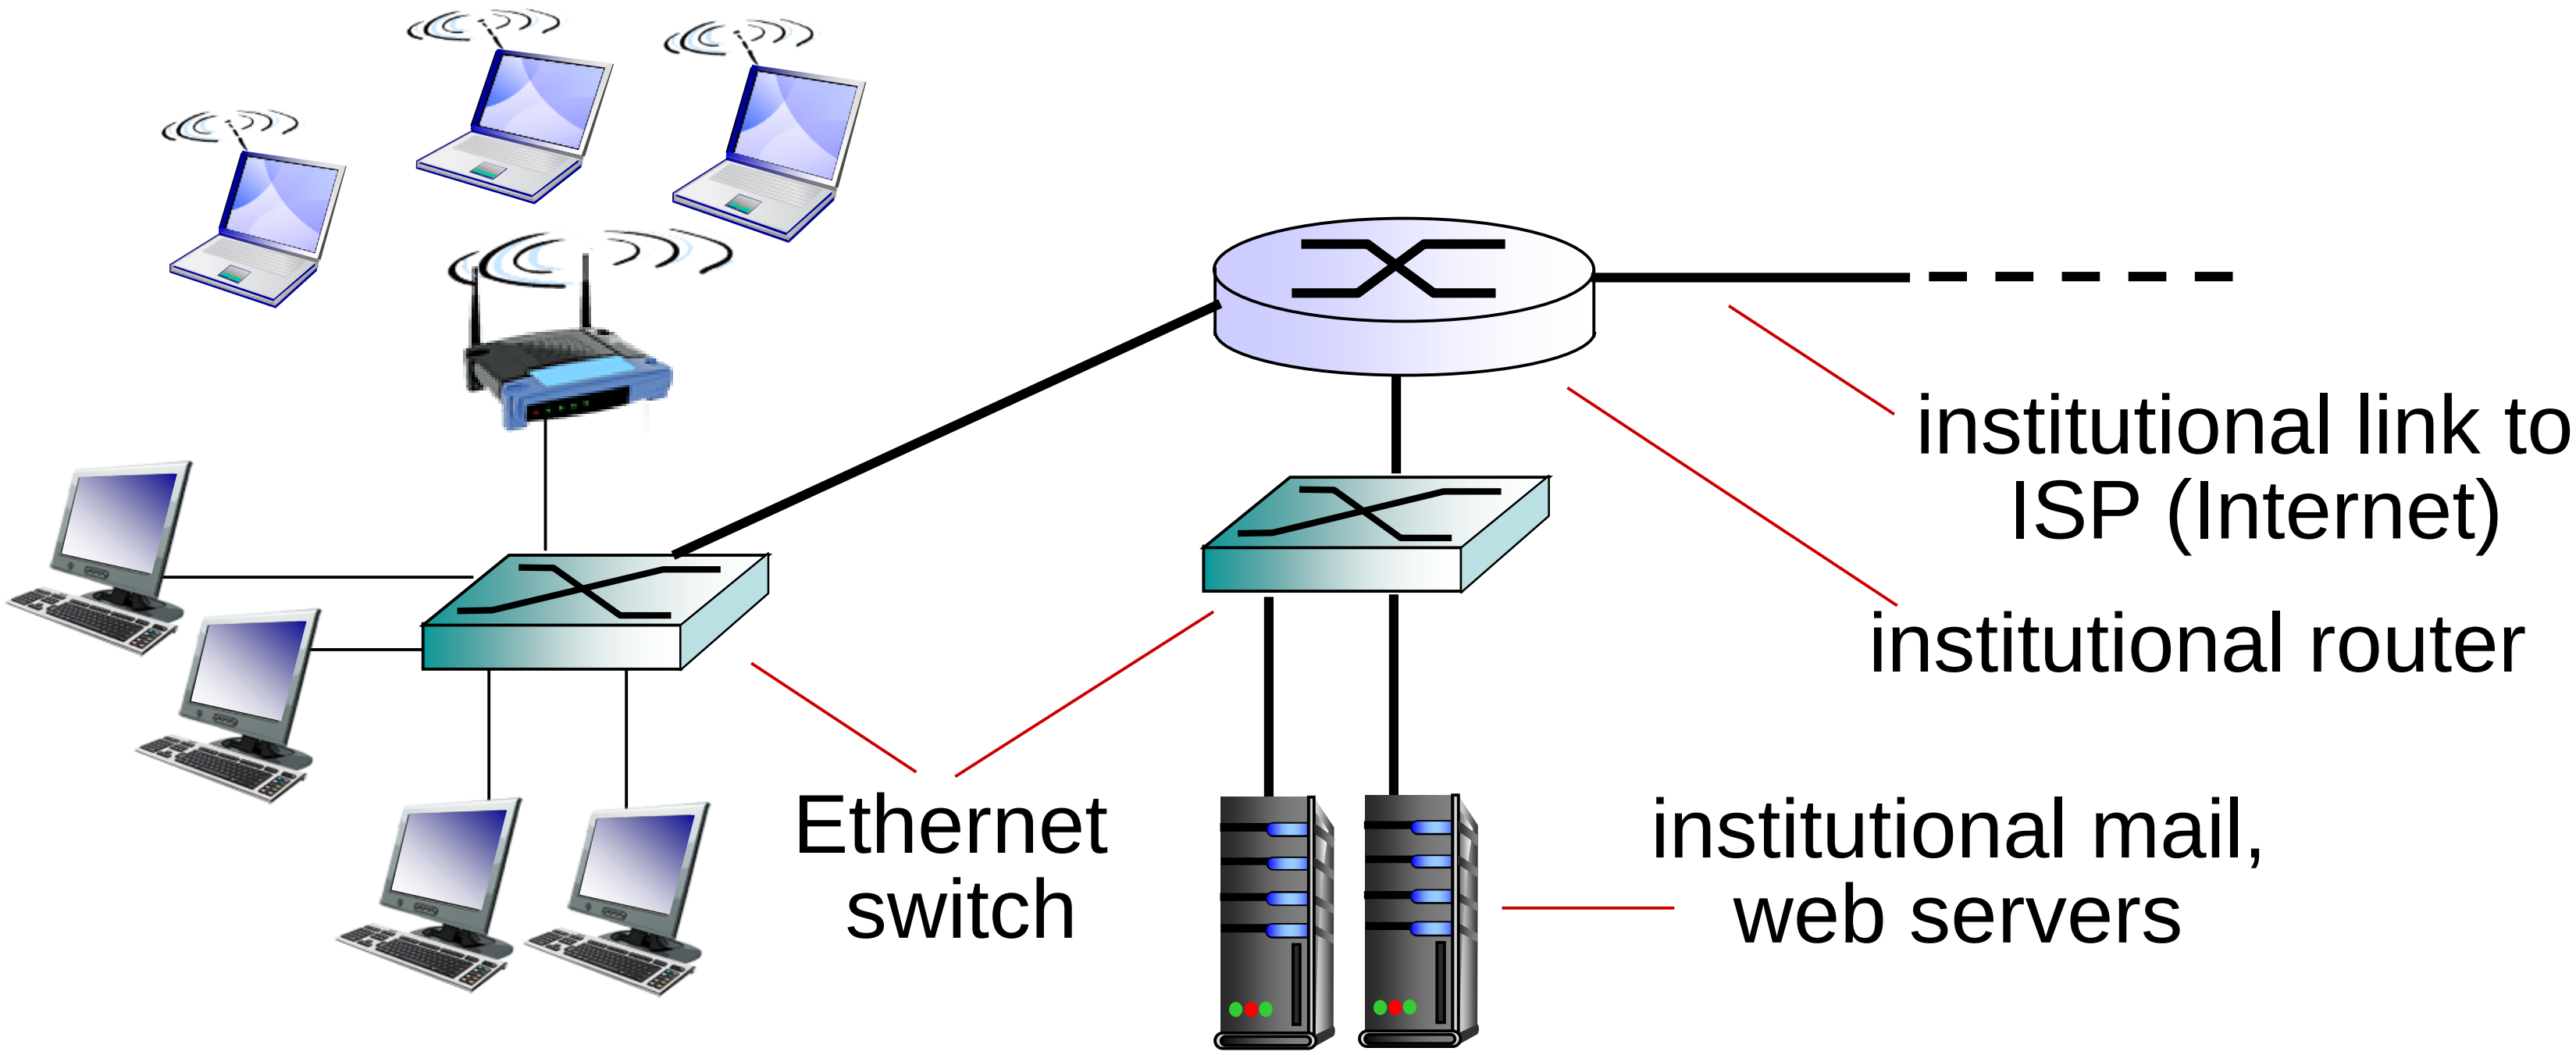

- typically used in companies, universities, etc
- 10 Mbps, 100Mbps, 1Gbps, 10Gbps transmission rates
- today, end systems typically connect into Ethernet switch

Chapter 1: roadmap

1.1 what *is* the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

The network core

- mesh of interconnected routers
- packet-switching: hosts break application-layer messages into *packets*
  - forward packets from one router to the next, across links on path from source to destination
  - each packet transmitted at full link capacity

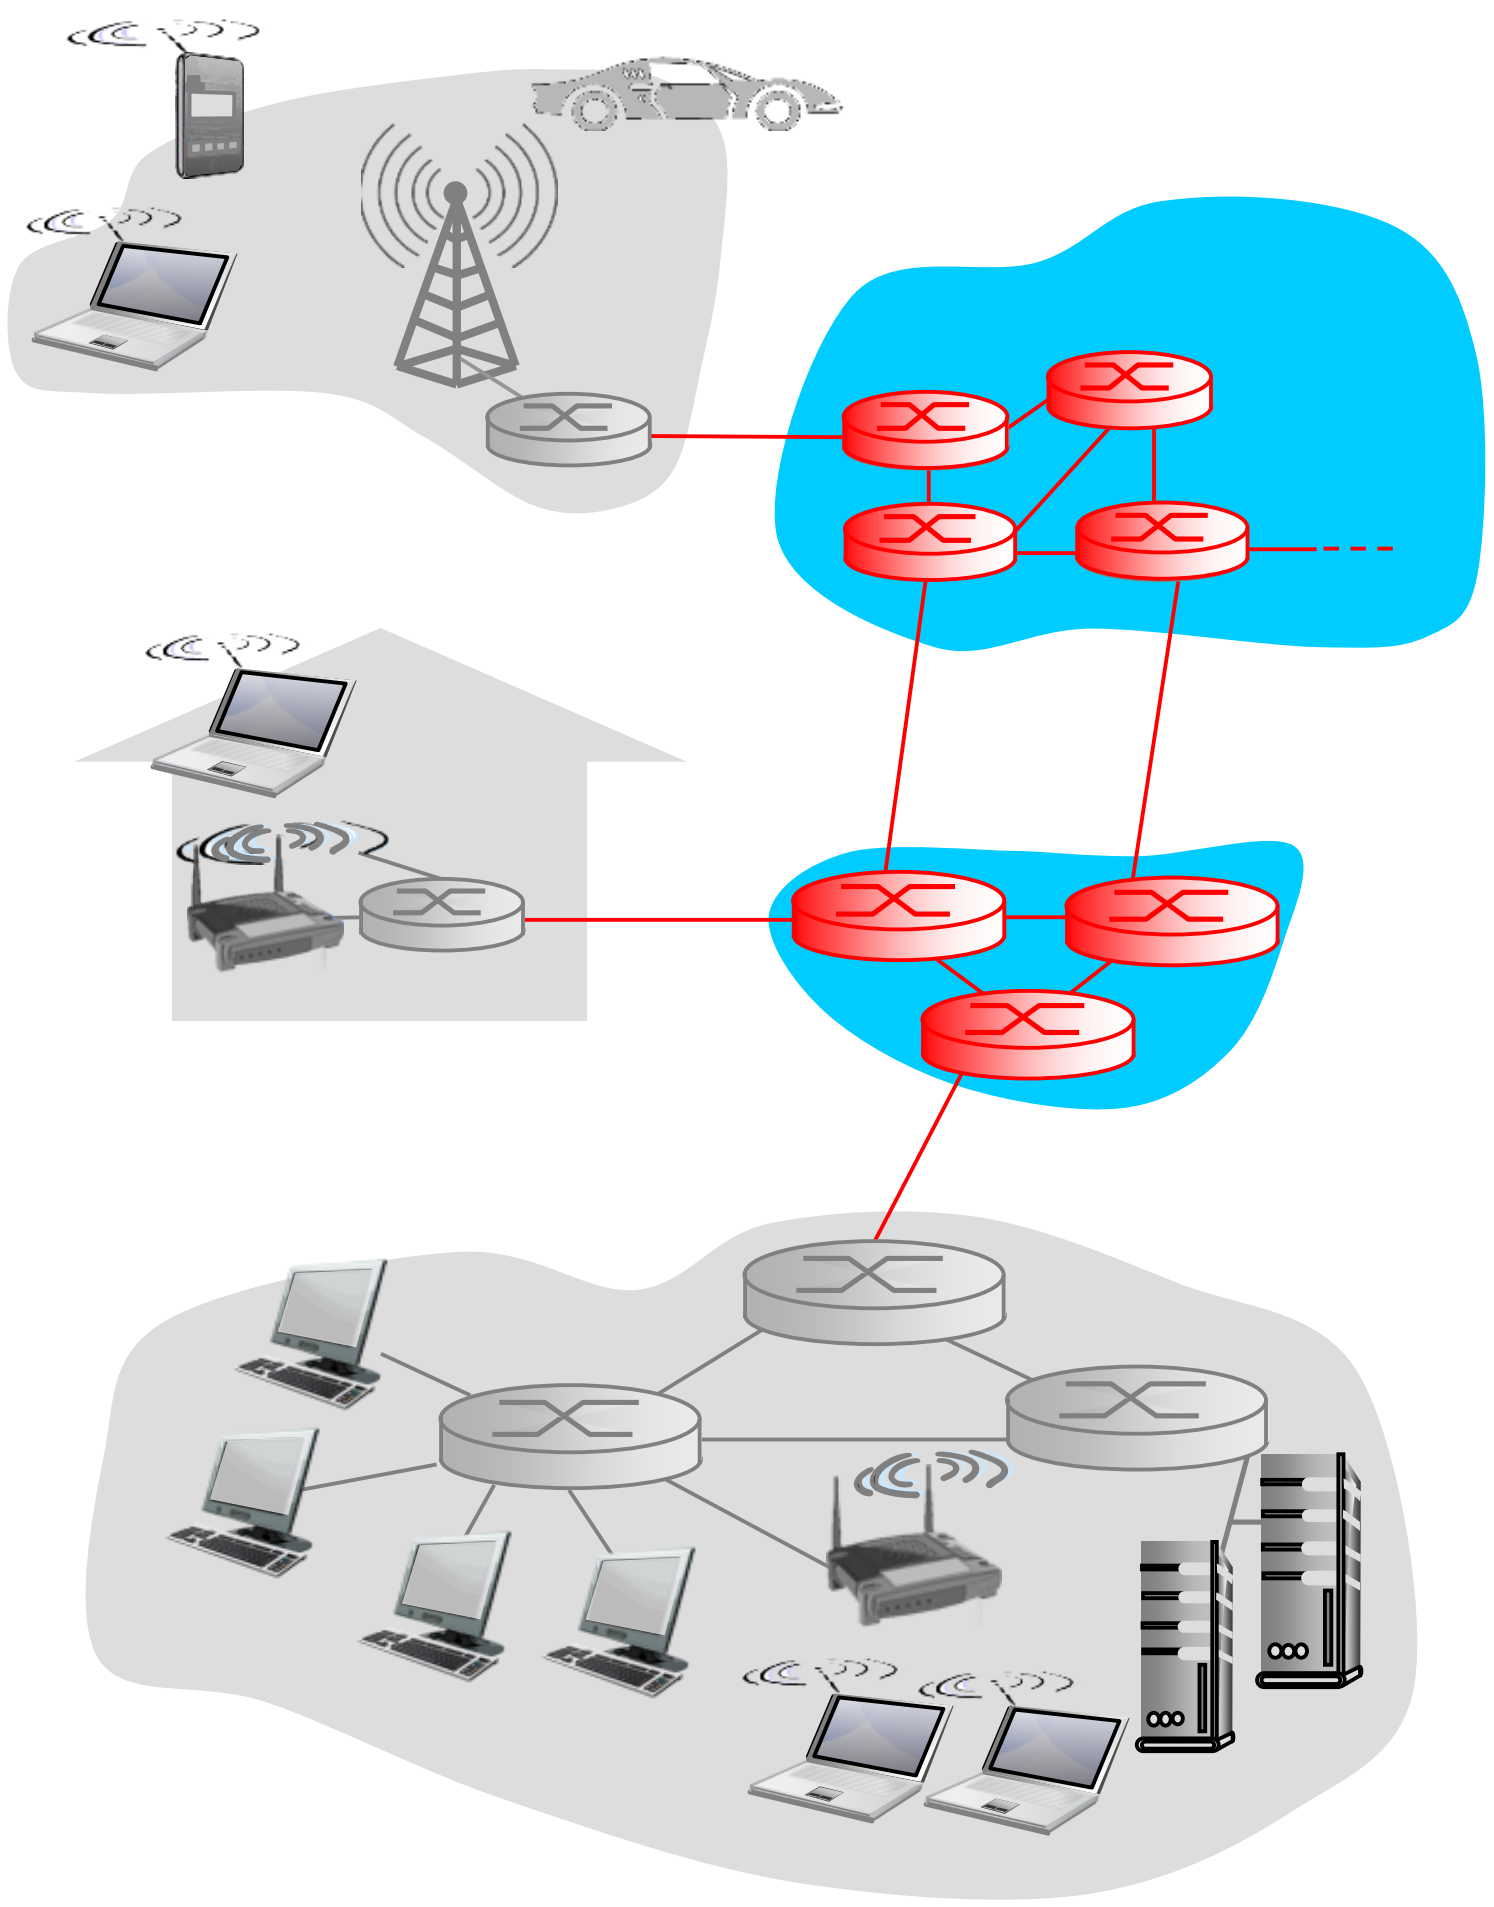

Packet-switching: store-and-forward

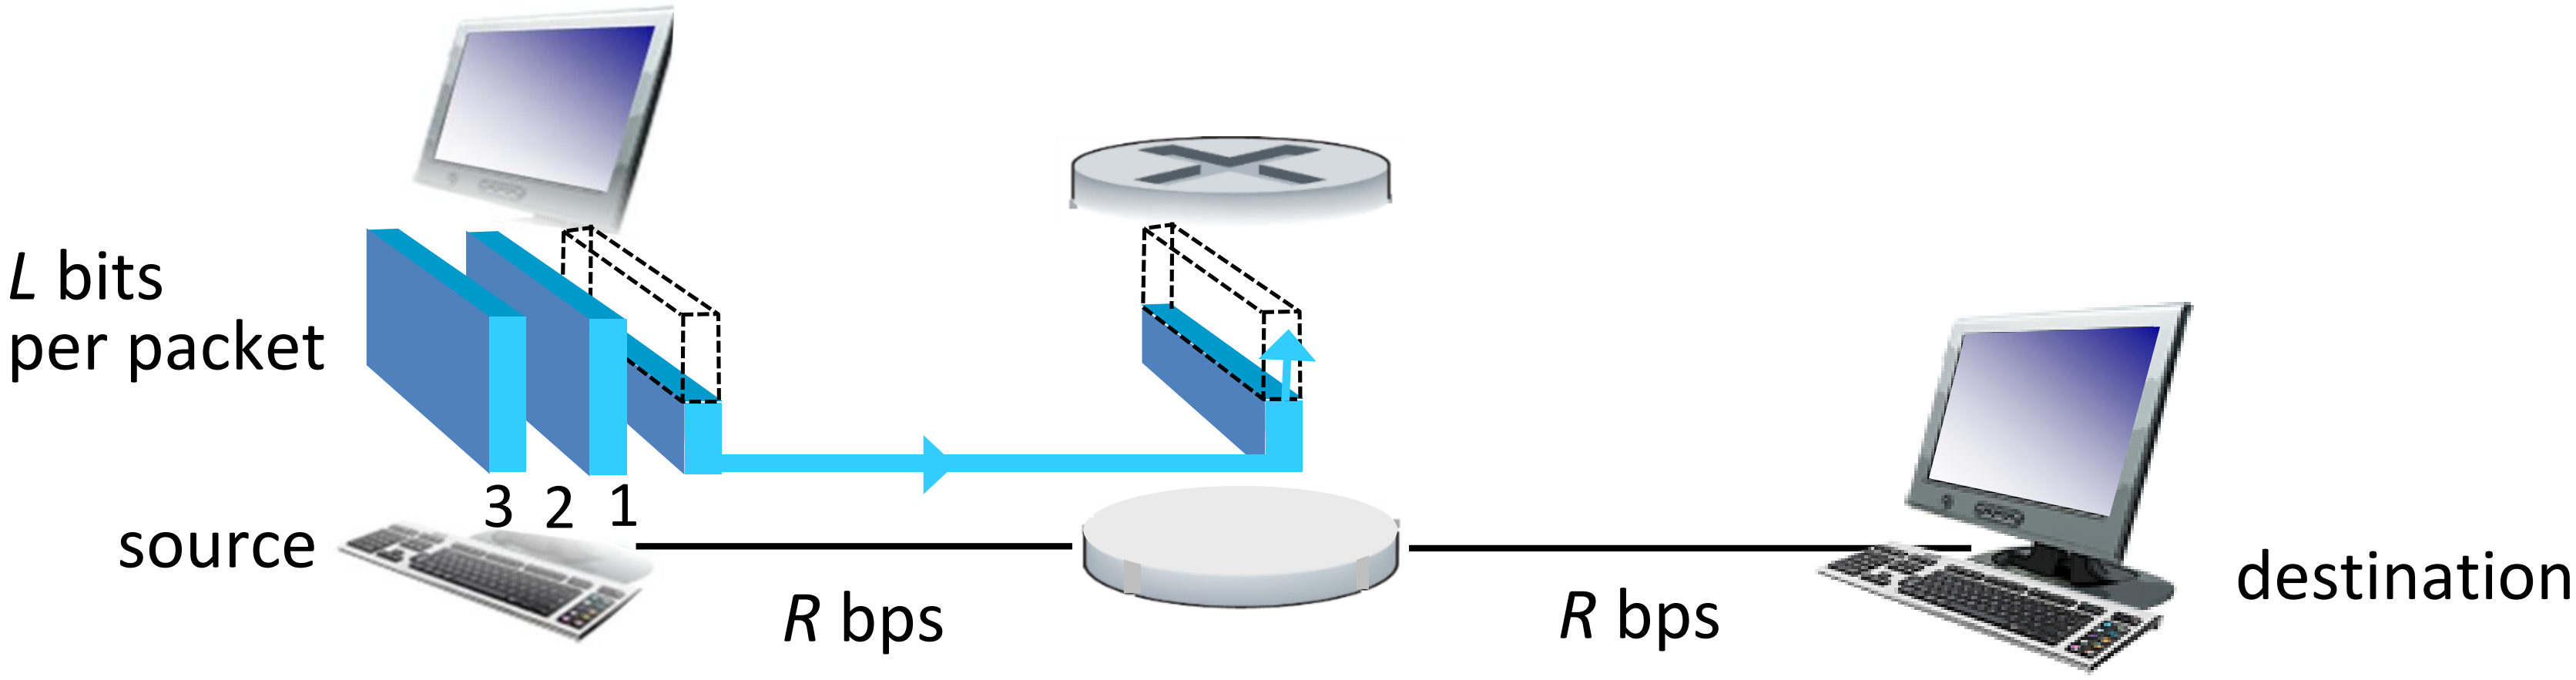

- takes *L*/*R* seconds to transmit (push out) *L*-bit packet into link at *R* bps
- *store and forward:* entire packet must arrive at router before it can be transmitted on next link
- end-end delay = 2*L*/*R* (assuming zero propagation delay)

more on delay shortly …

one-hop numerical example:

- *L* = 7.5 Mbits
- *R* = 1.5 Mbps
- one-hop transmission delay = 5 sec

Packet Switching: queueing delay, loss

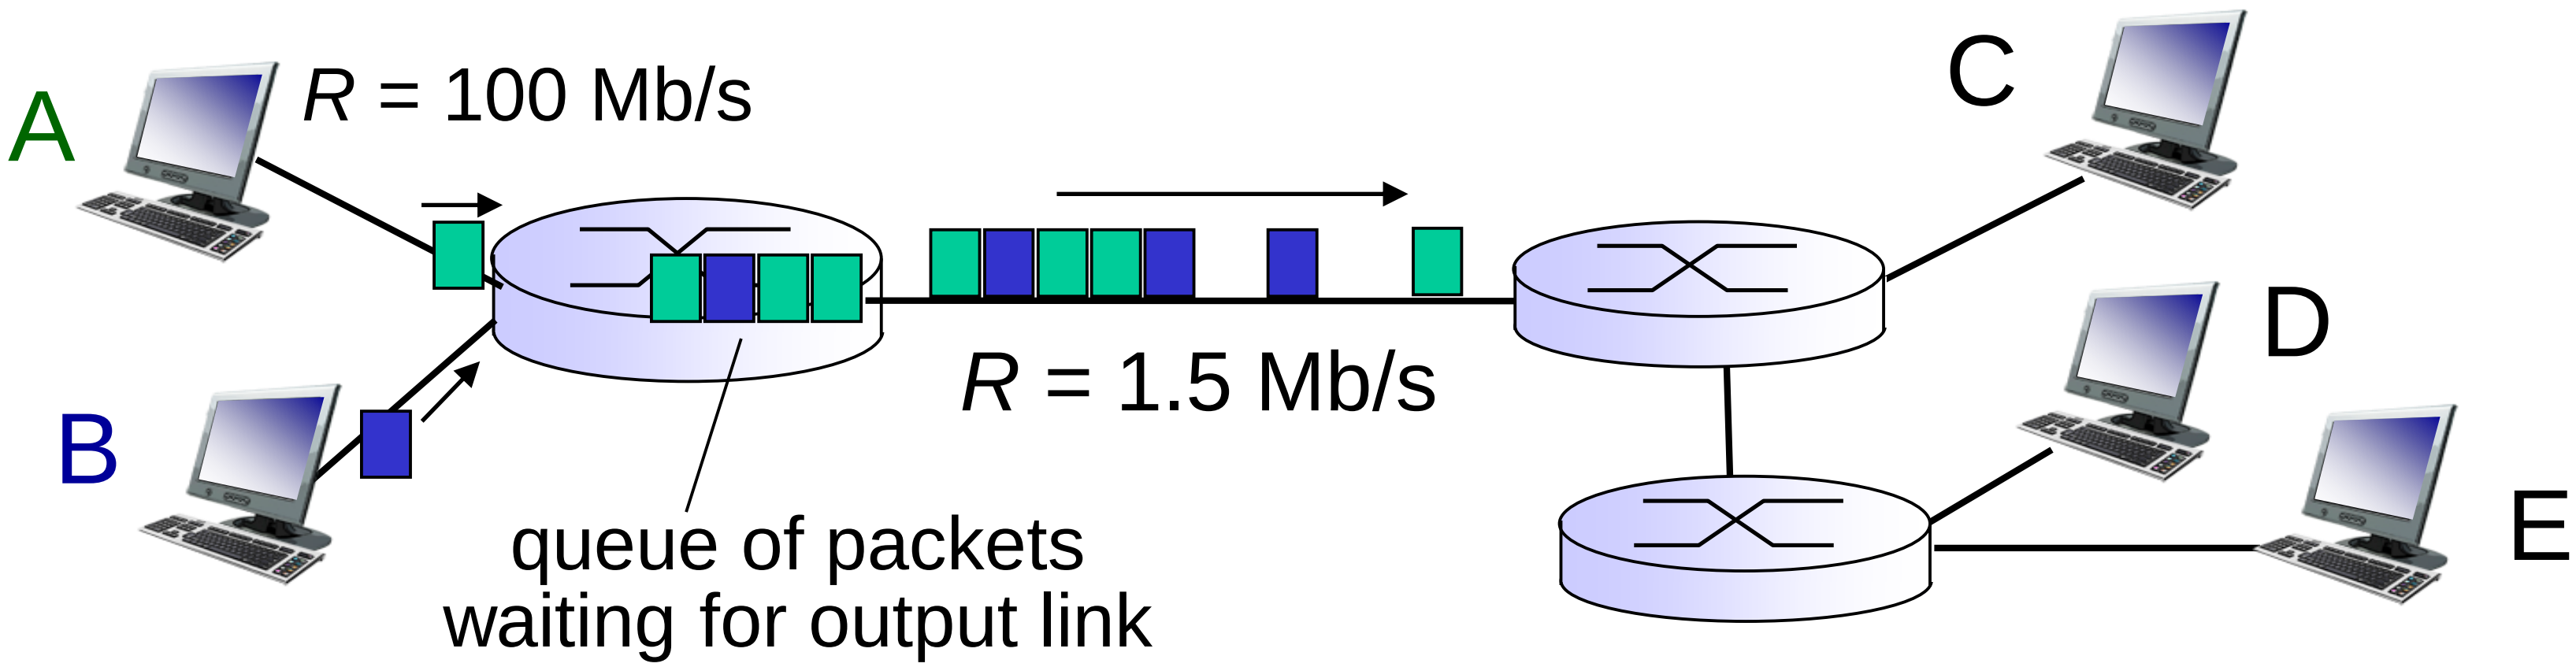

queuing and loss:

- If arrival rate (in bits) to link exceeds transmission rate of link for a period of time:
  - packets will queue, wait to be transmitted on link
  - packets can be dropped (lost) if memory (buffer) fills up

Two key network-core functions

routing: determines source-destination route taken by packets

- *routing algorithms*

forwarding: move packets from router's input to appropriate router output

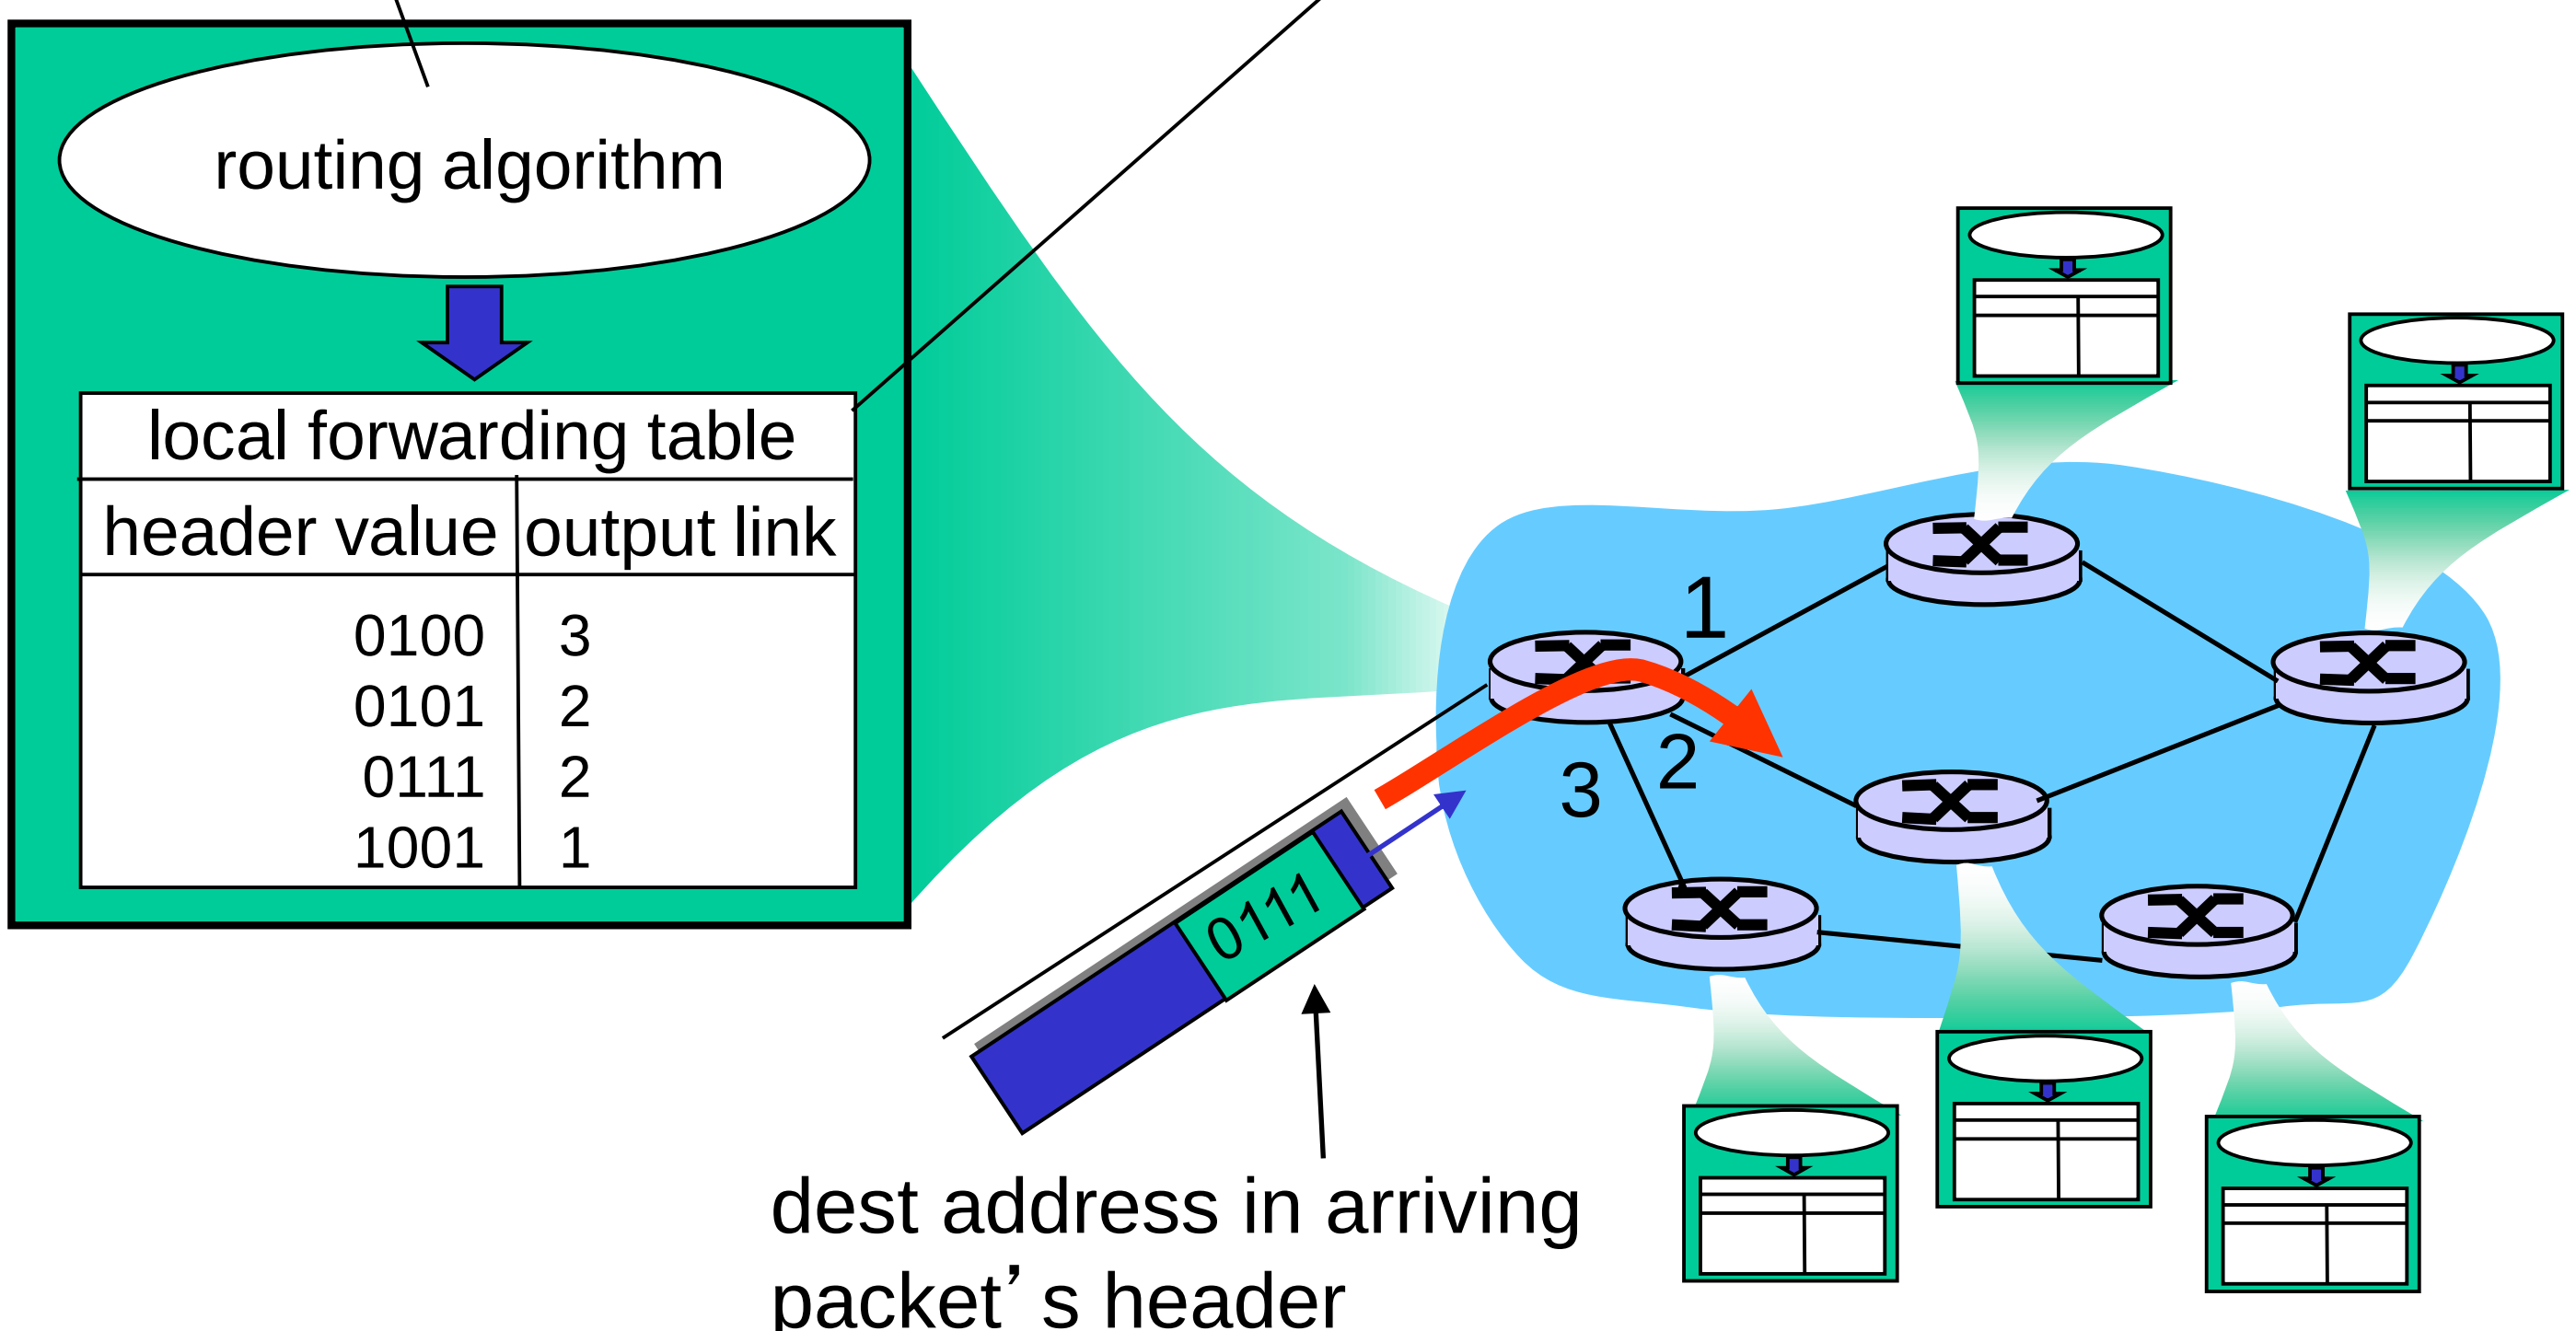

Alternative core: circuit switching

end-end resources allocated to, reserved for "call" between source & dest:

- In diagram, each link has four circuits.
  - call gets 2nd circuit in top link and 1st circuit in right link.
- dedicated resources: no sharing
  - circuit-like (guaranteed) performance
- circuit segment idle if not used by call *(no sharing)*
- Commonly used in traditional telephone networks

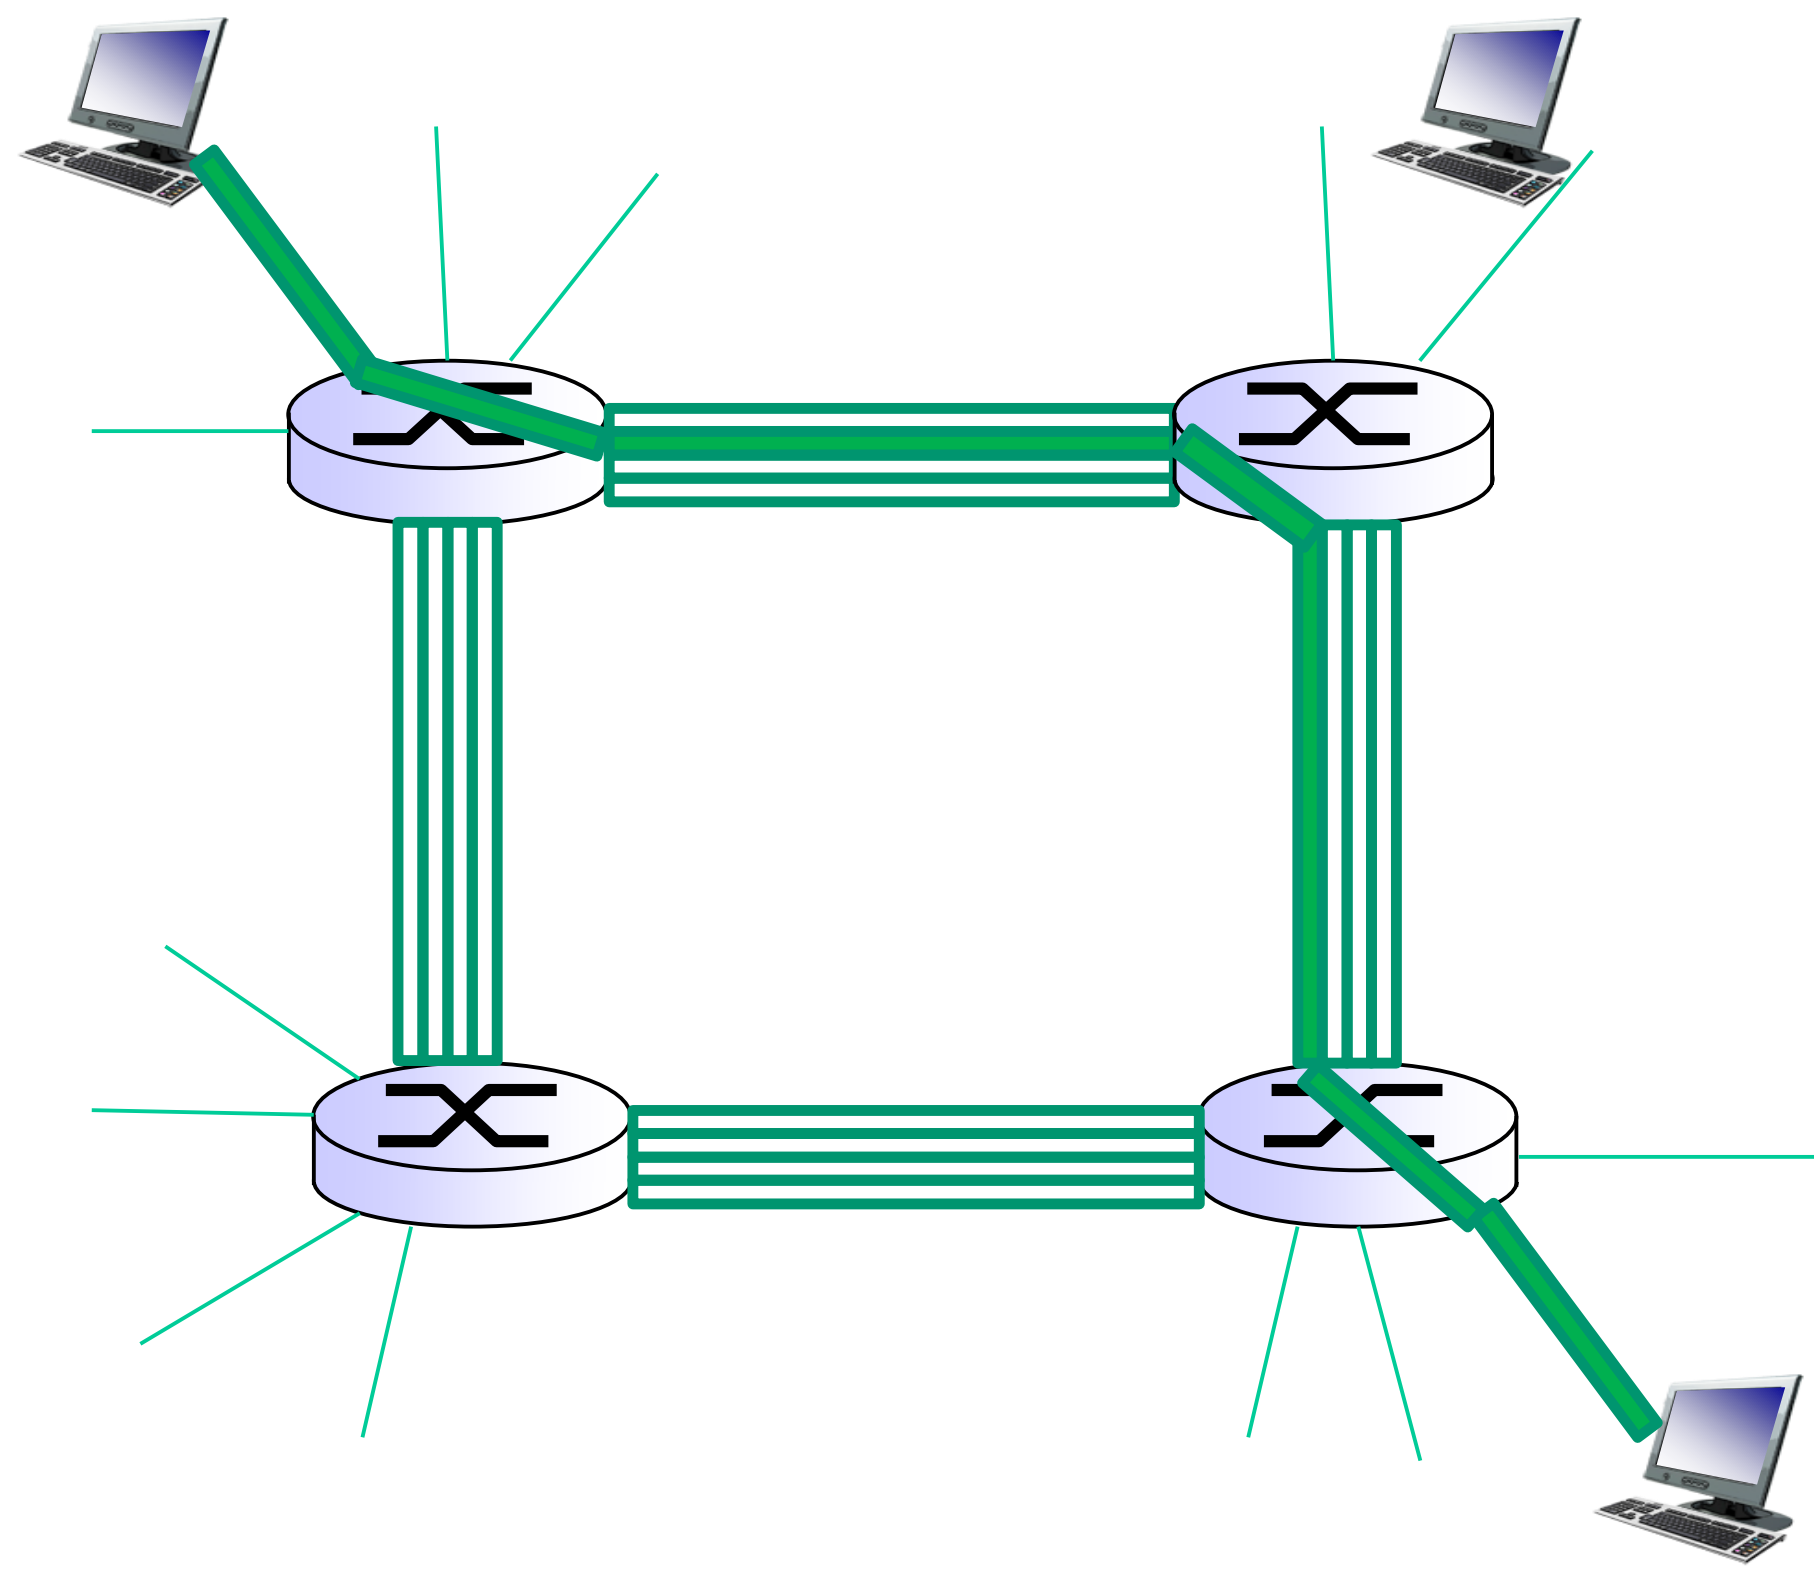

Circuit switching: FDM versus TDM

Example:

4 users

FDM

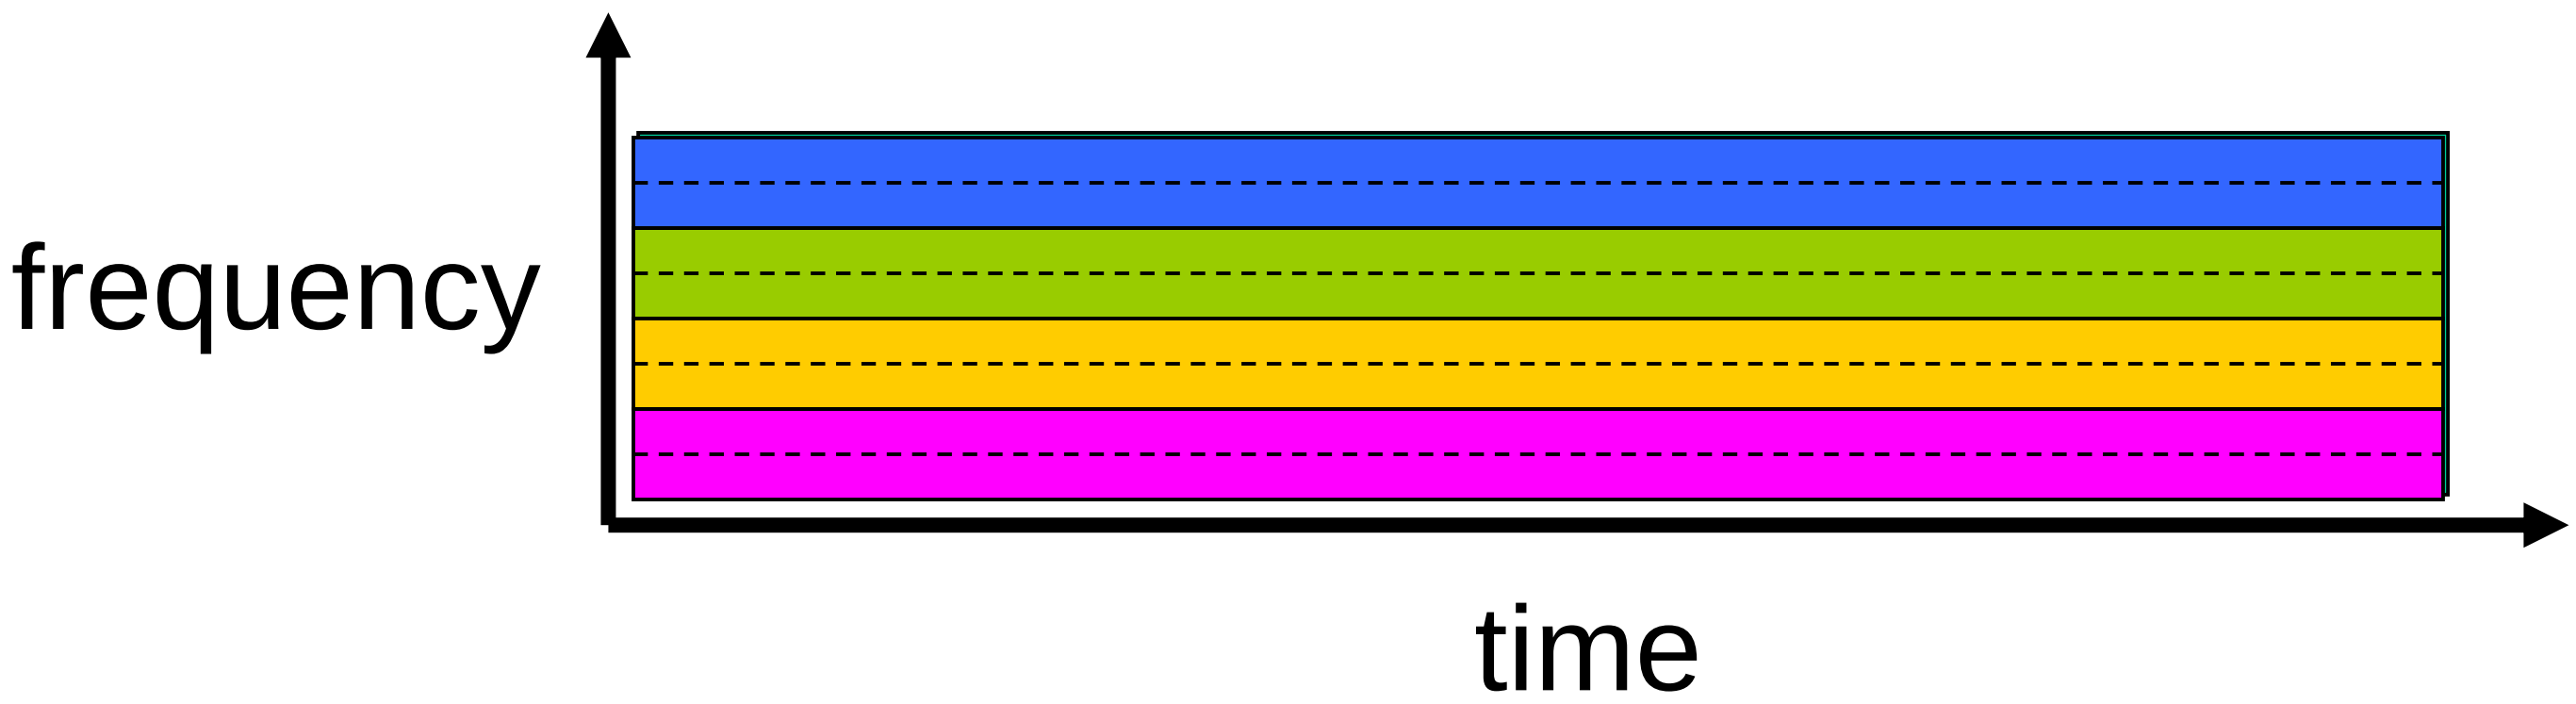

TDM

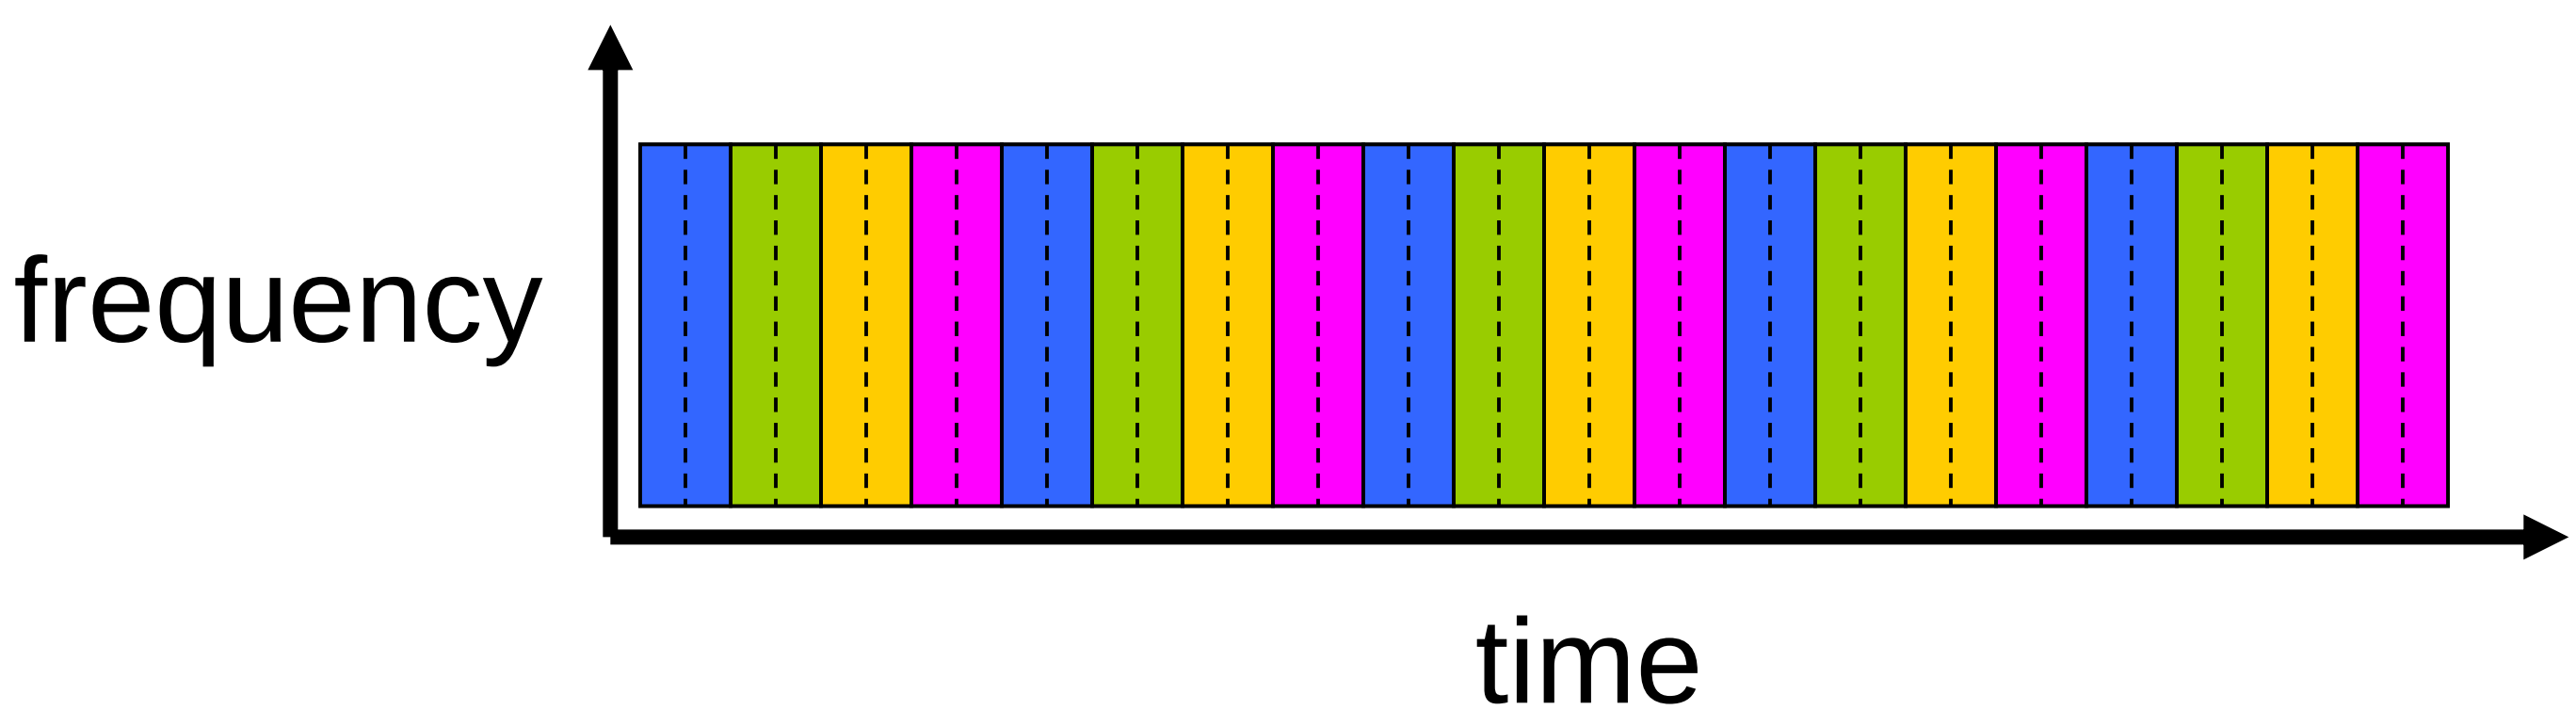

Packet switching versus circuit switching

packet switching allows more users to use network!

example:

- 1 Mb/s link
- each user:
  - 100 kb/s when "active"
  - active 10% of time

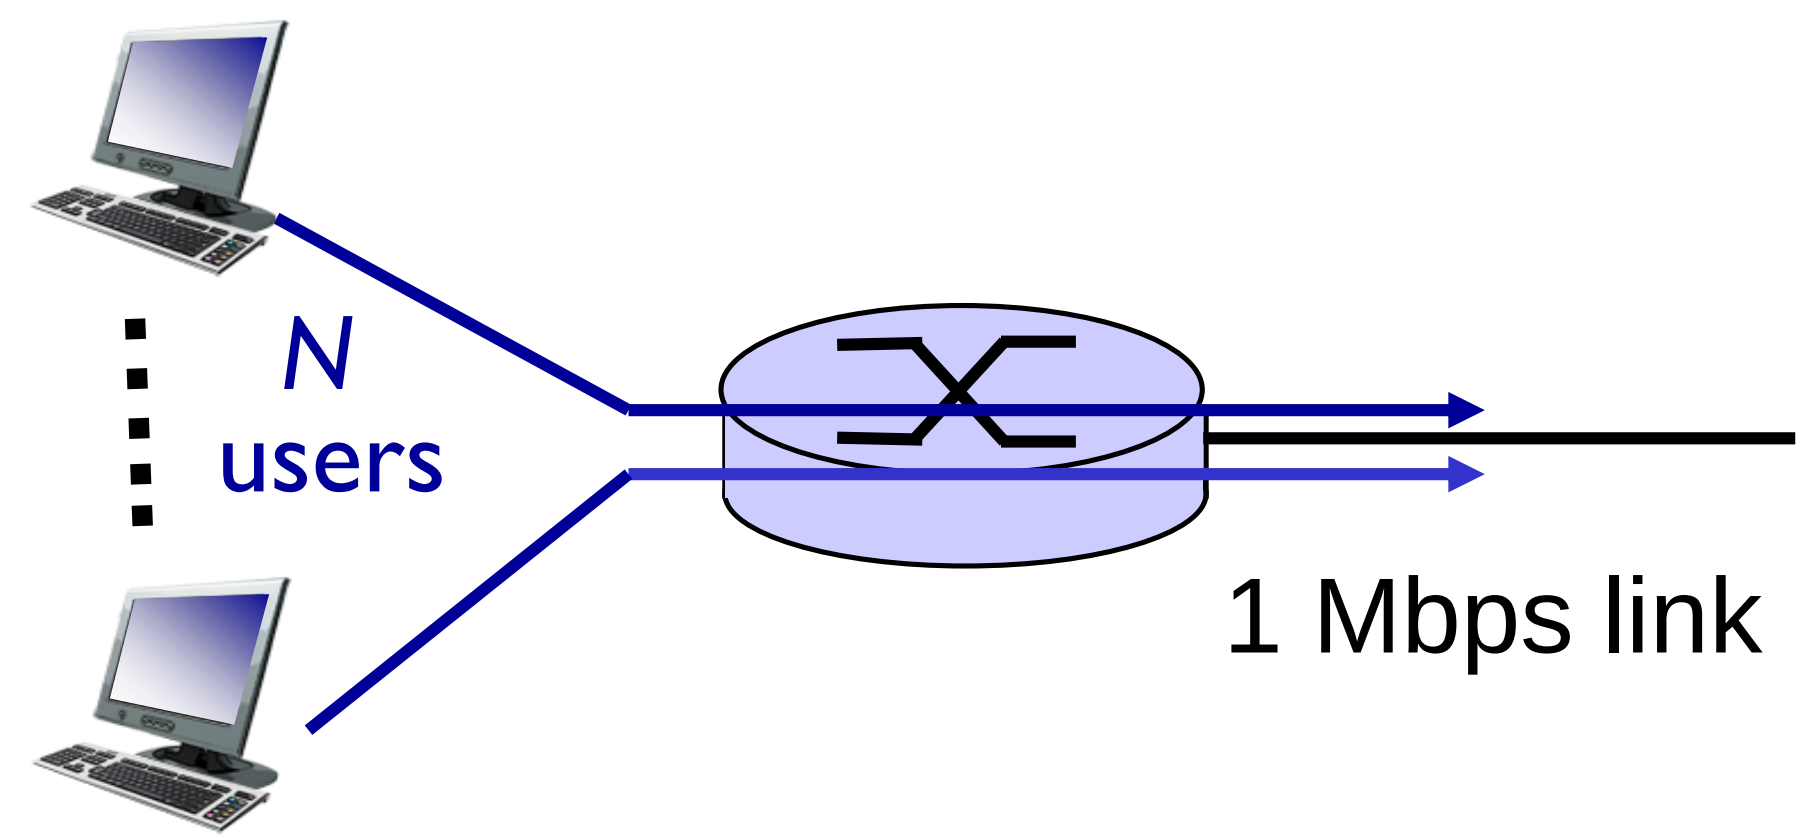

❖ *circuit-switching:*
- 10 users

❖ *packet switching:*
- with 35 users, probability > 10 active at same time is less than .0004 *

Q: how did we get value 0.0004?

Q: what happens if > 35 users ?

Packet switching versus circuit switching

is packet switching a "slam dunk winner?"

- great for bursty data
  - resource sharing
  - simpler, no call setup
- excessive congestion possible: packet delay and loss
  - protocols needed for reliable data transfer, congestion control
- *Q:* How to provide circuit-like behavior?
  - bandwidth guarantees needed for audio/video apps
  - still an unsolved problem (chapter 7)

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet-switching)?

Internet structure: network of networks

- End systems connect to Internet via access ISPs (Internet Service Providers)
  - Residential, company and university ISPs
- Access ISPs in turn must be interconnected.
  - So that any two hosts can send packets to each other
- Resulting network of networks is very complex
  - Evolution was driven by economics and national policies
- Let's take a stepwise approach to describe current Internet structure

Internet structure: network of networks

Question: given *millions* of access ISPs, how to connect them together?

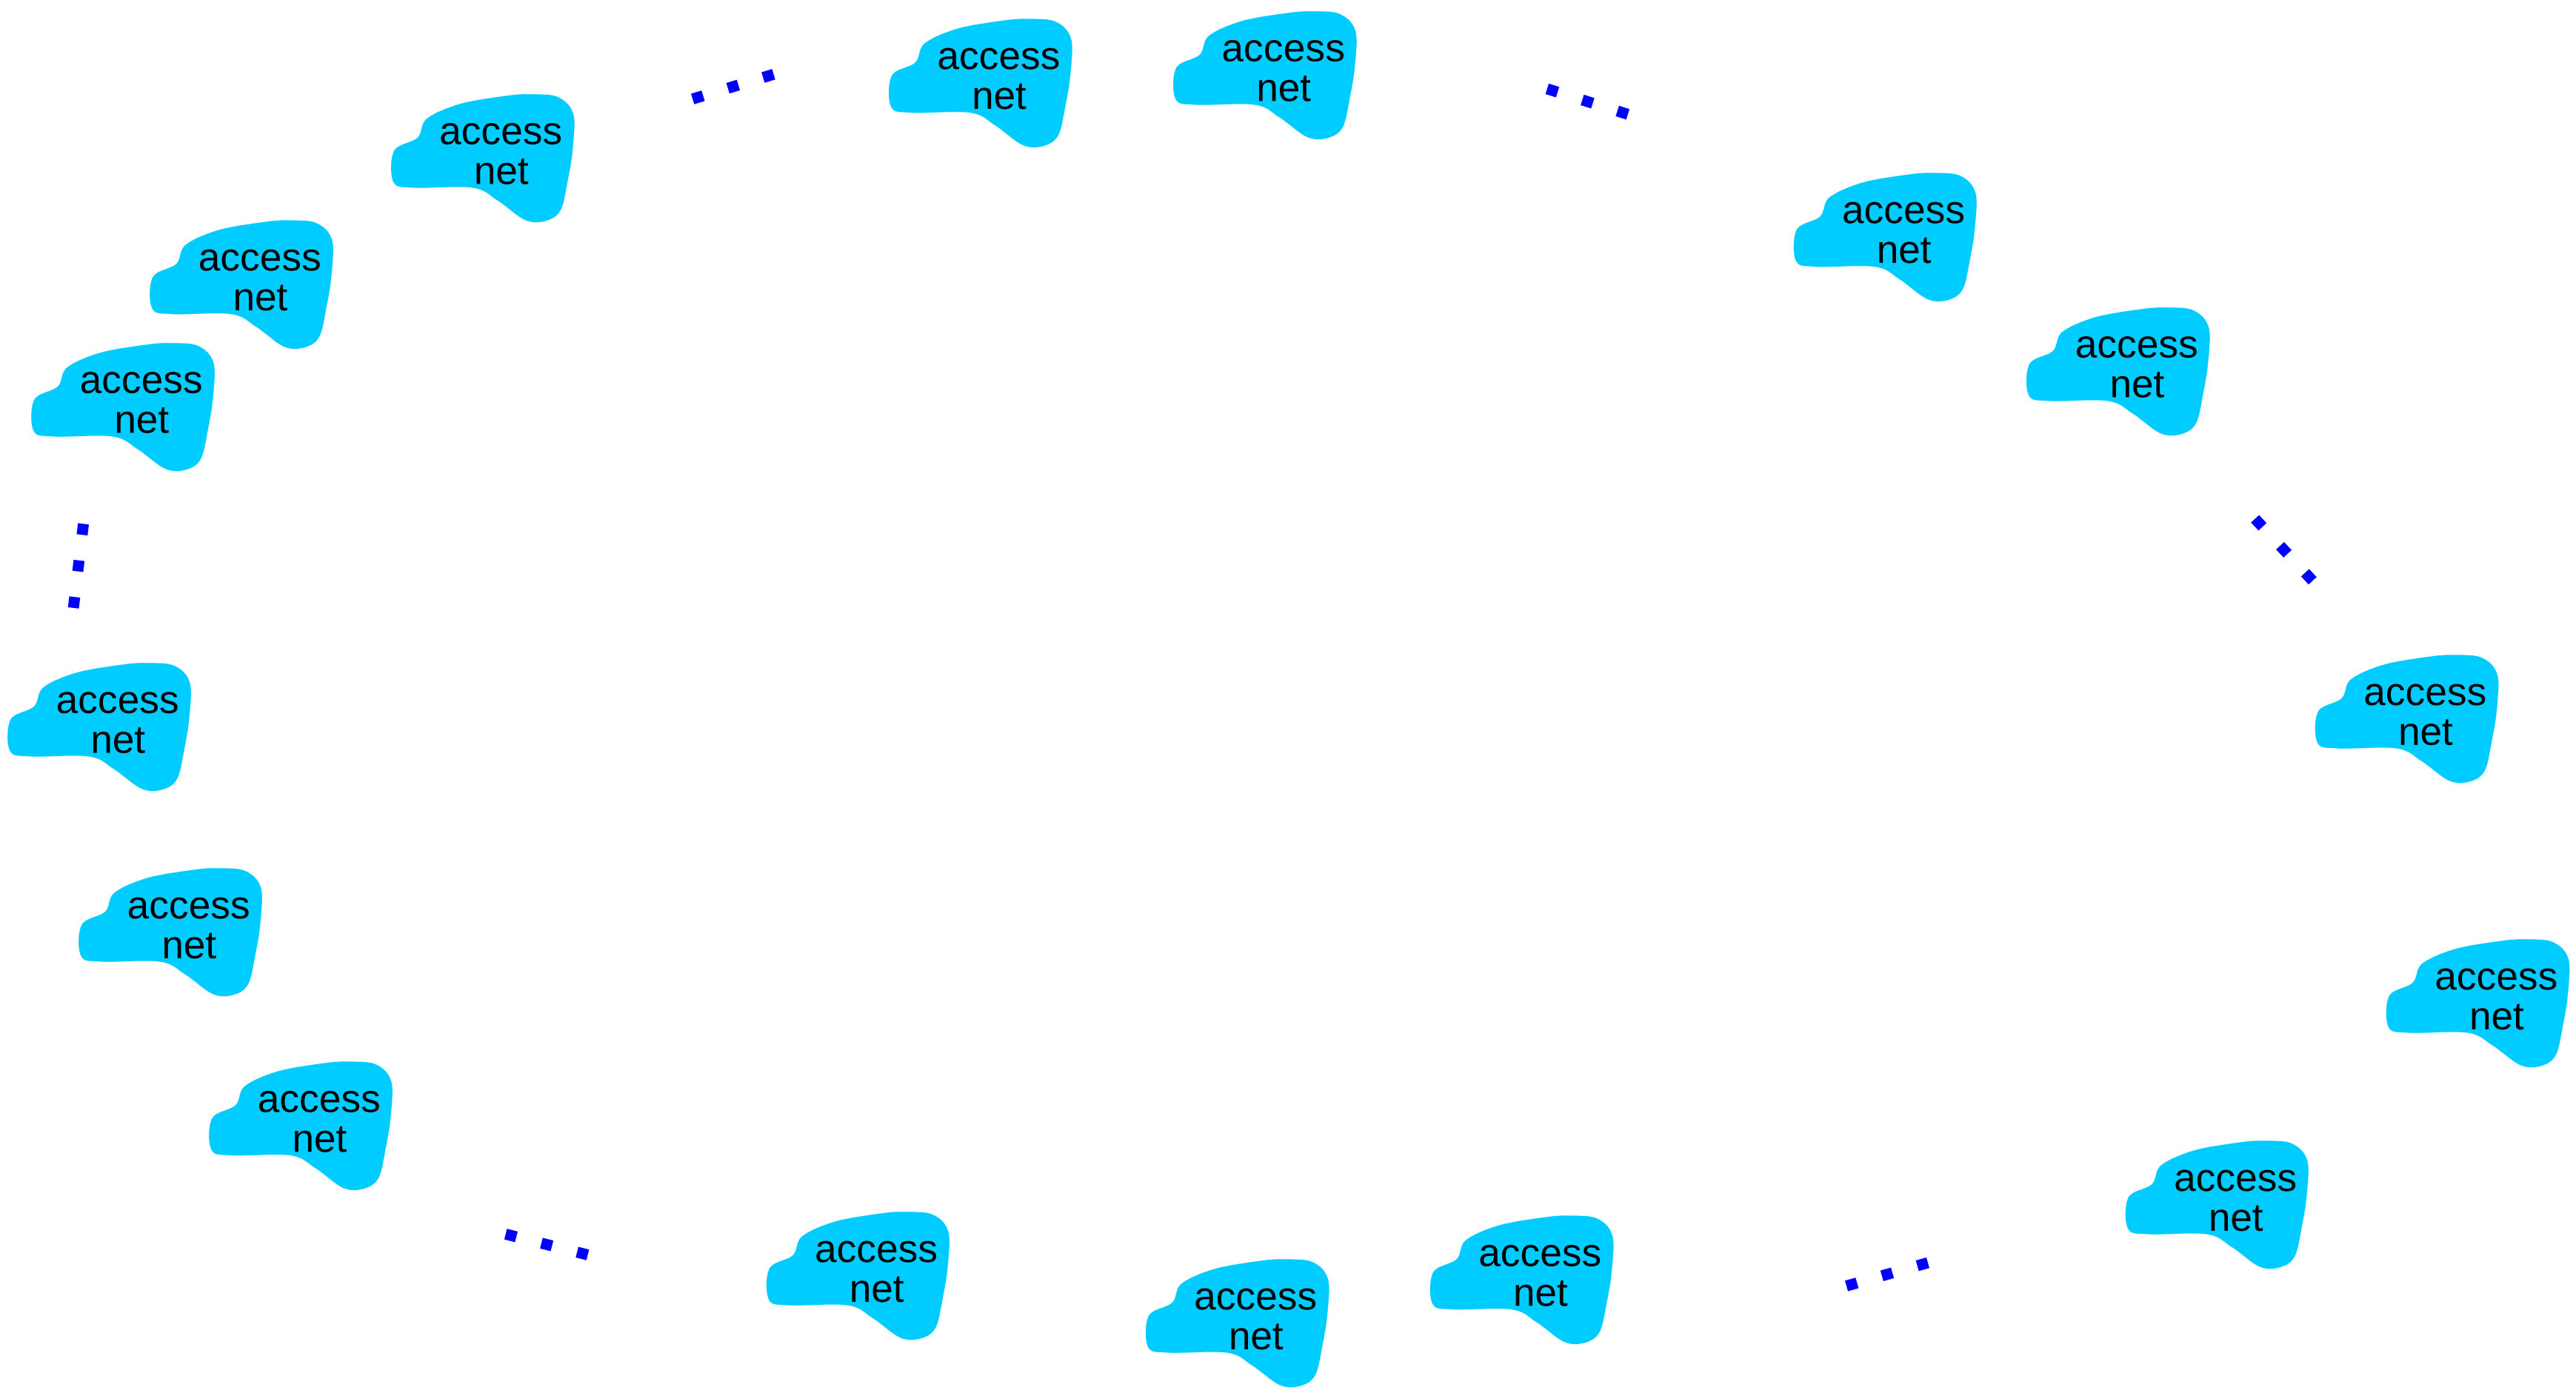

Internet structure: network of networks

Option: connect each access ISP to every other access ISP?

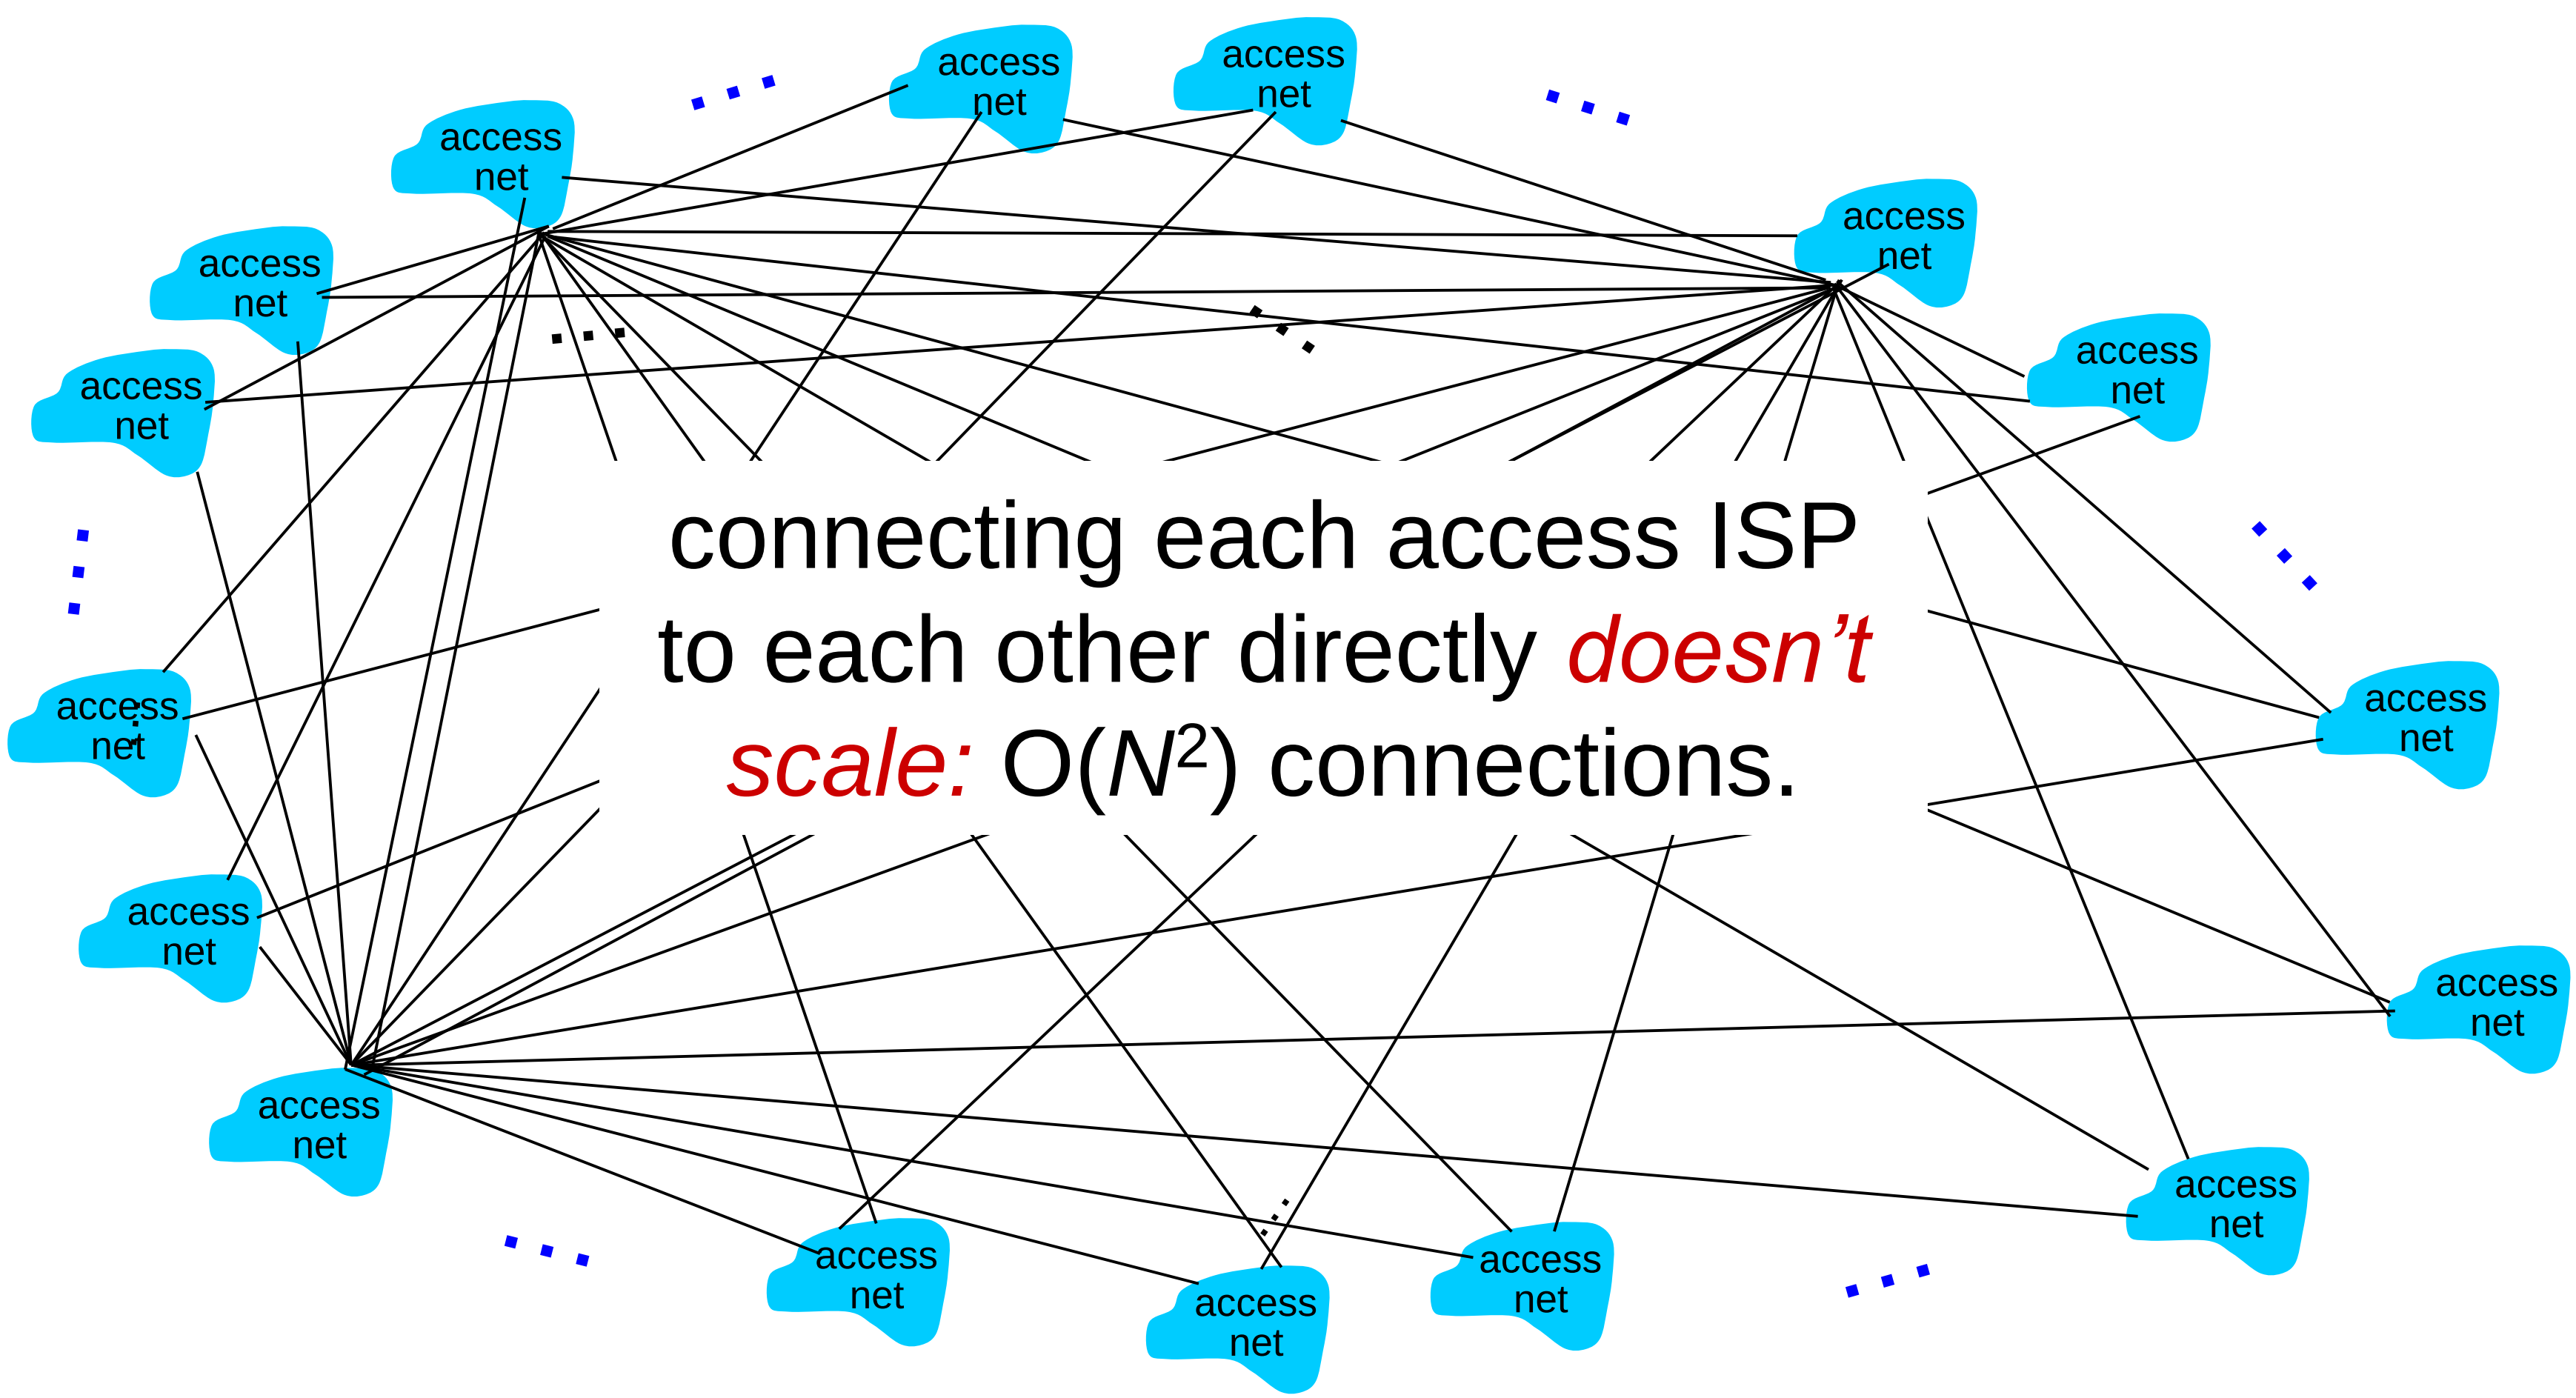

Internet structure: network of networks

Option: connect each access ISP to a global transit ISP? Customer and provider ISPs have economic agreement.

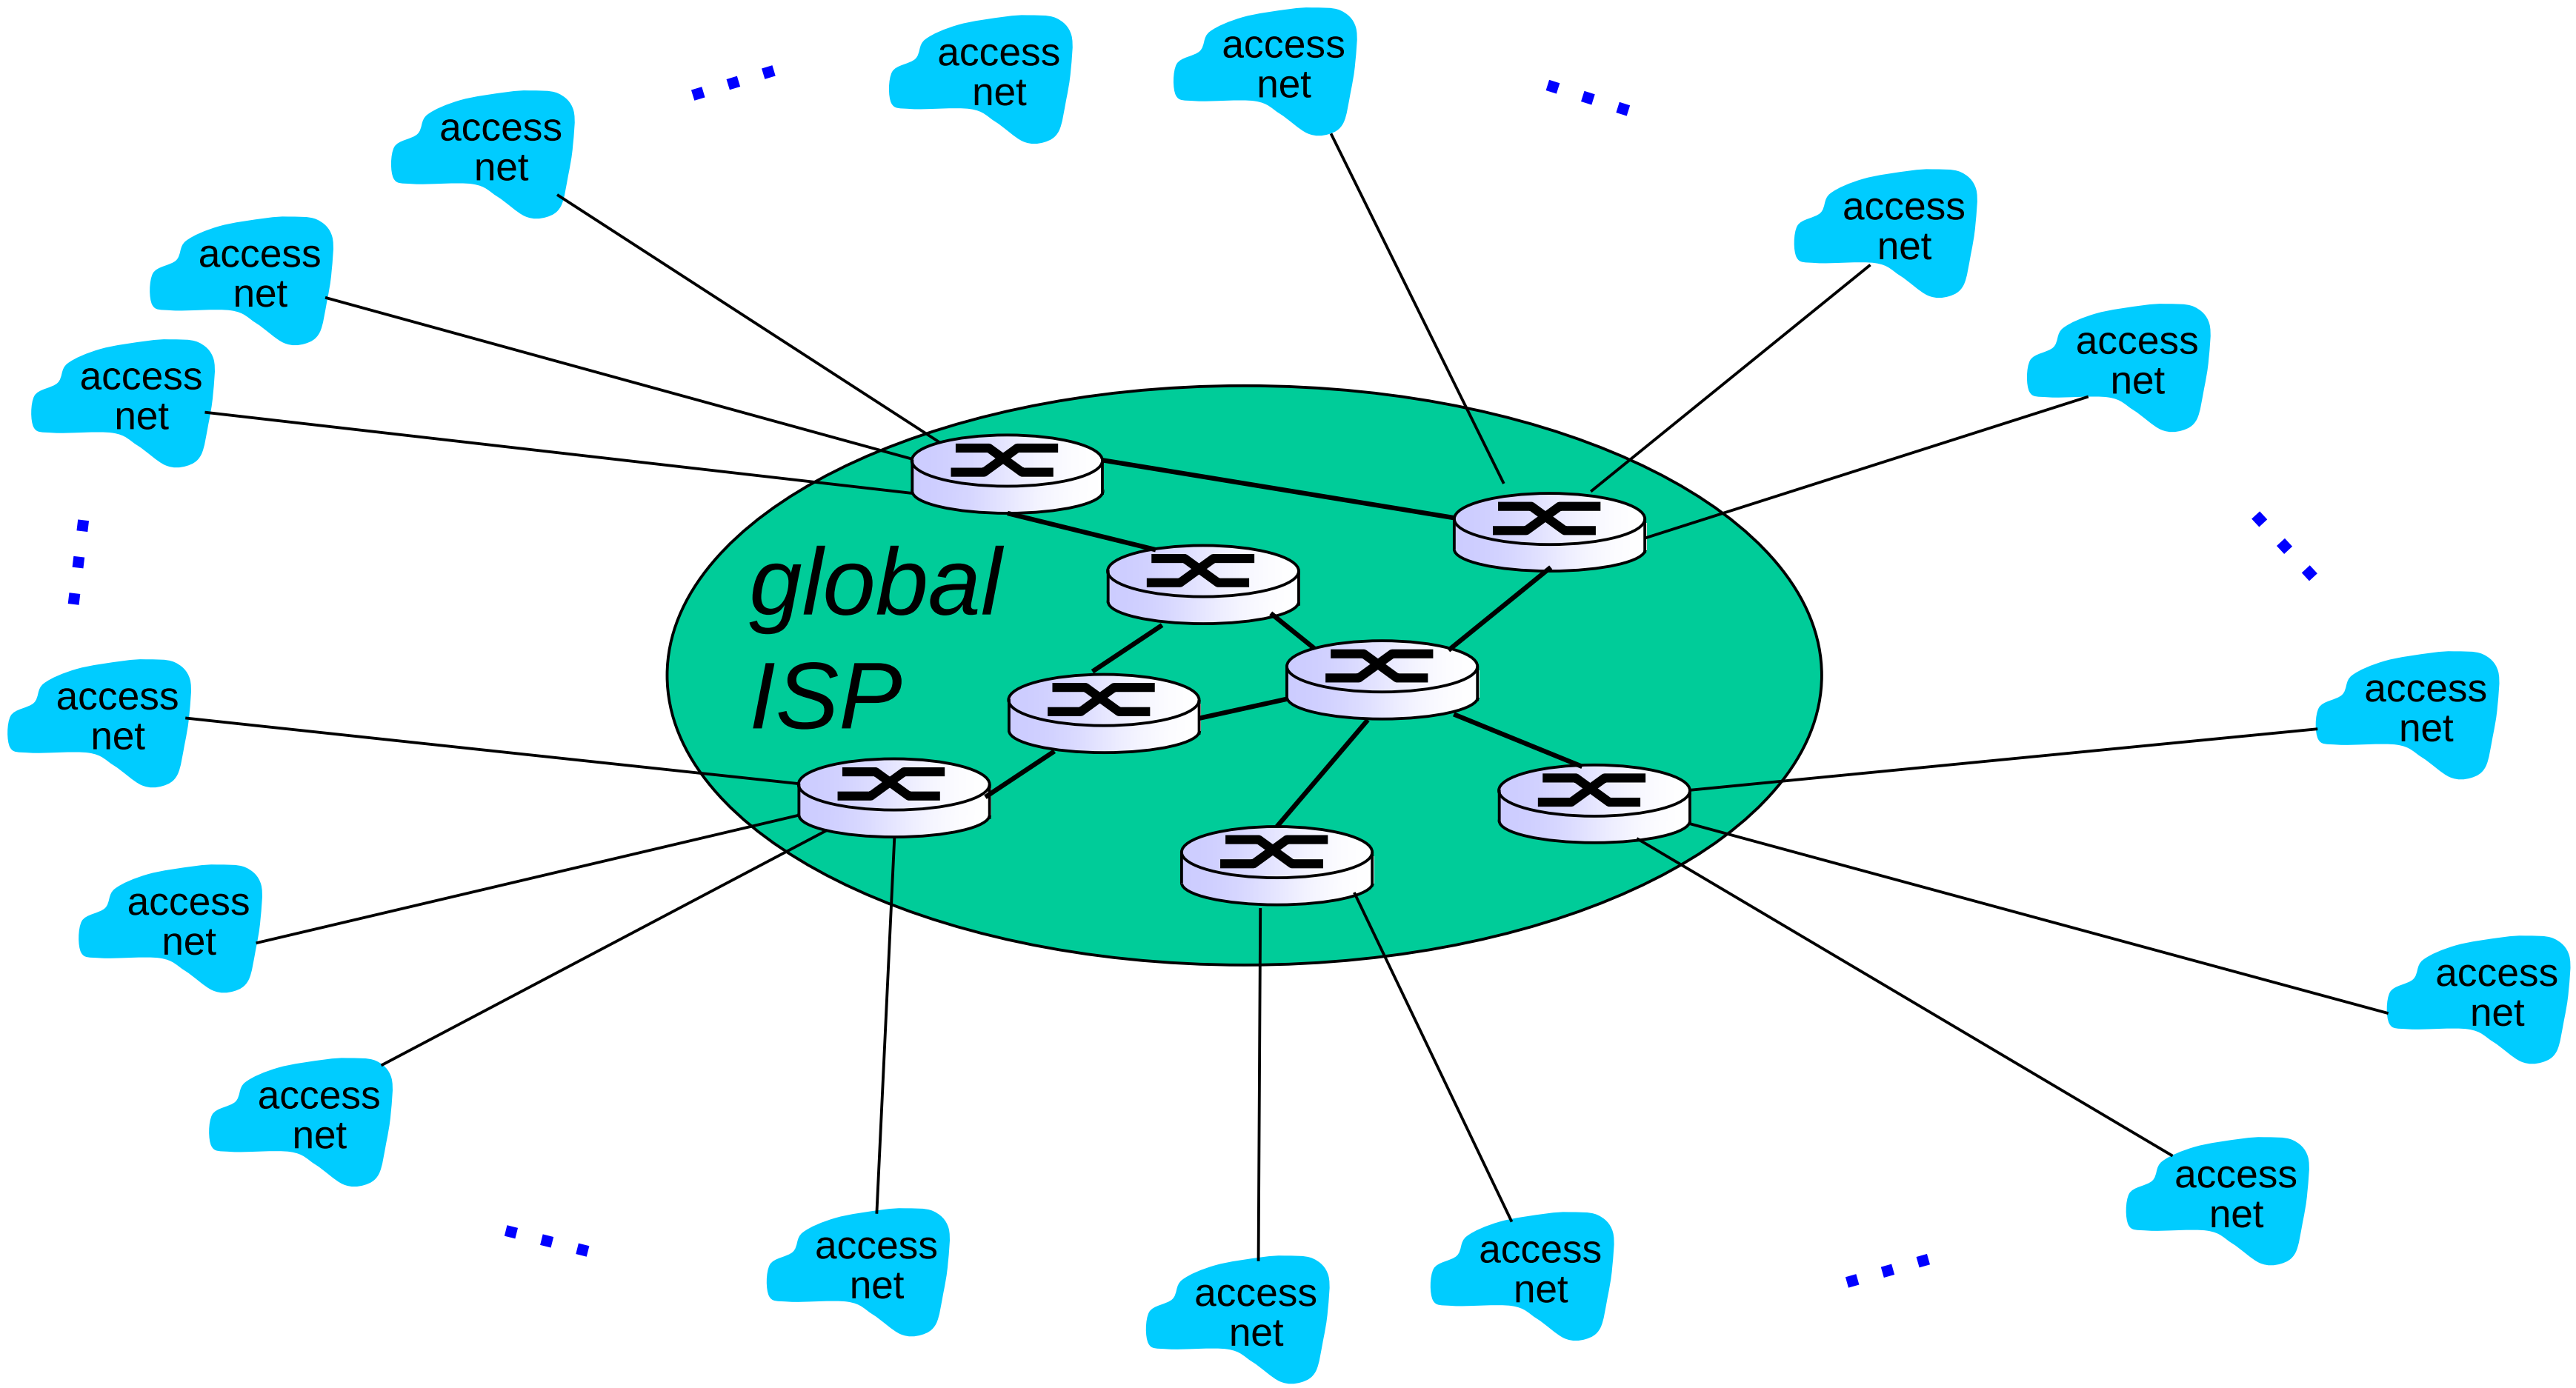

Internet structure: network of networks

But if one global ISP is viable business, there will be competitors ….

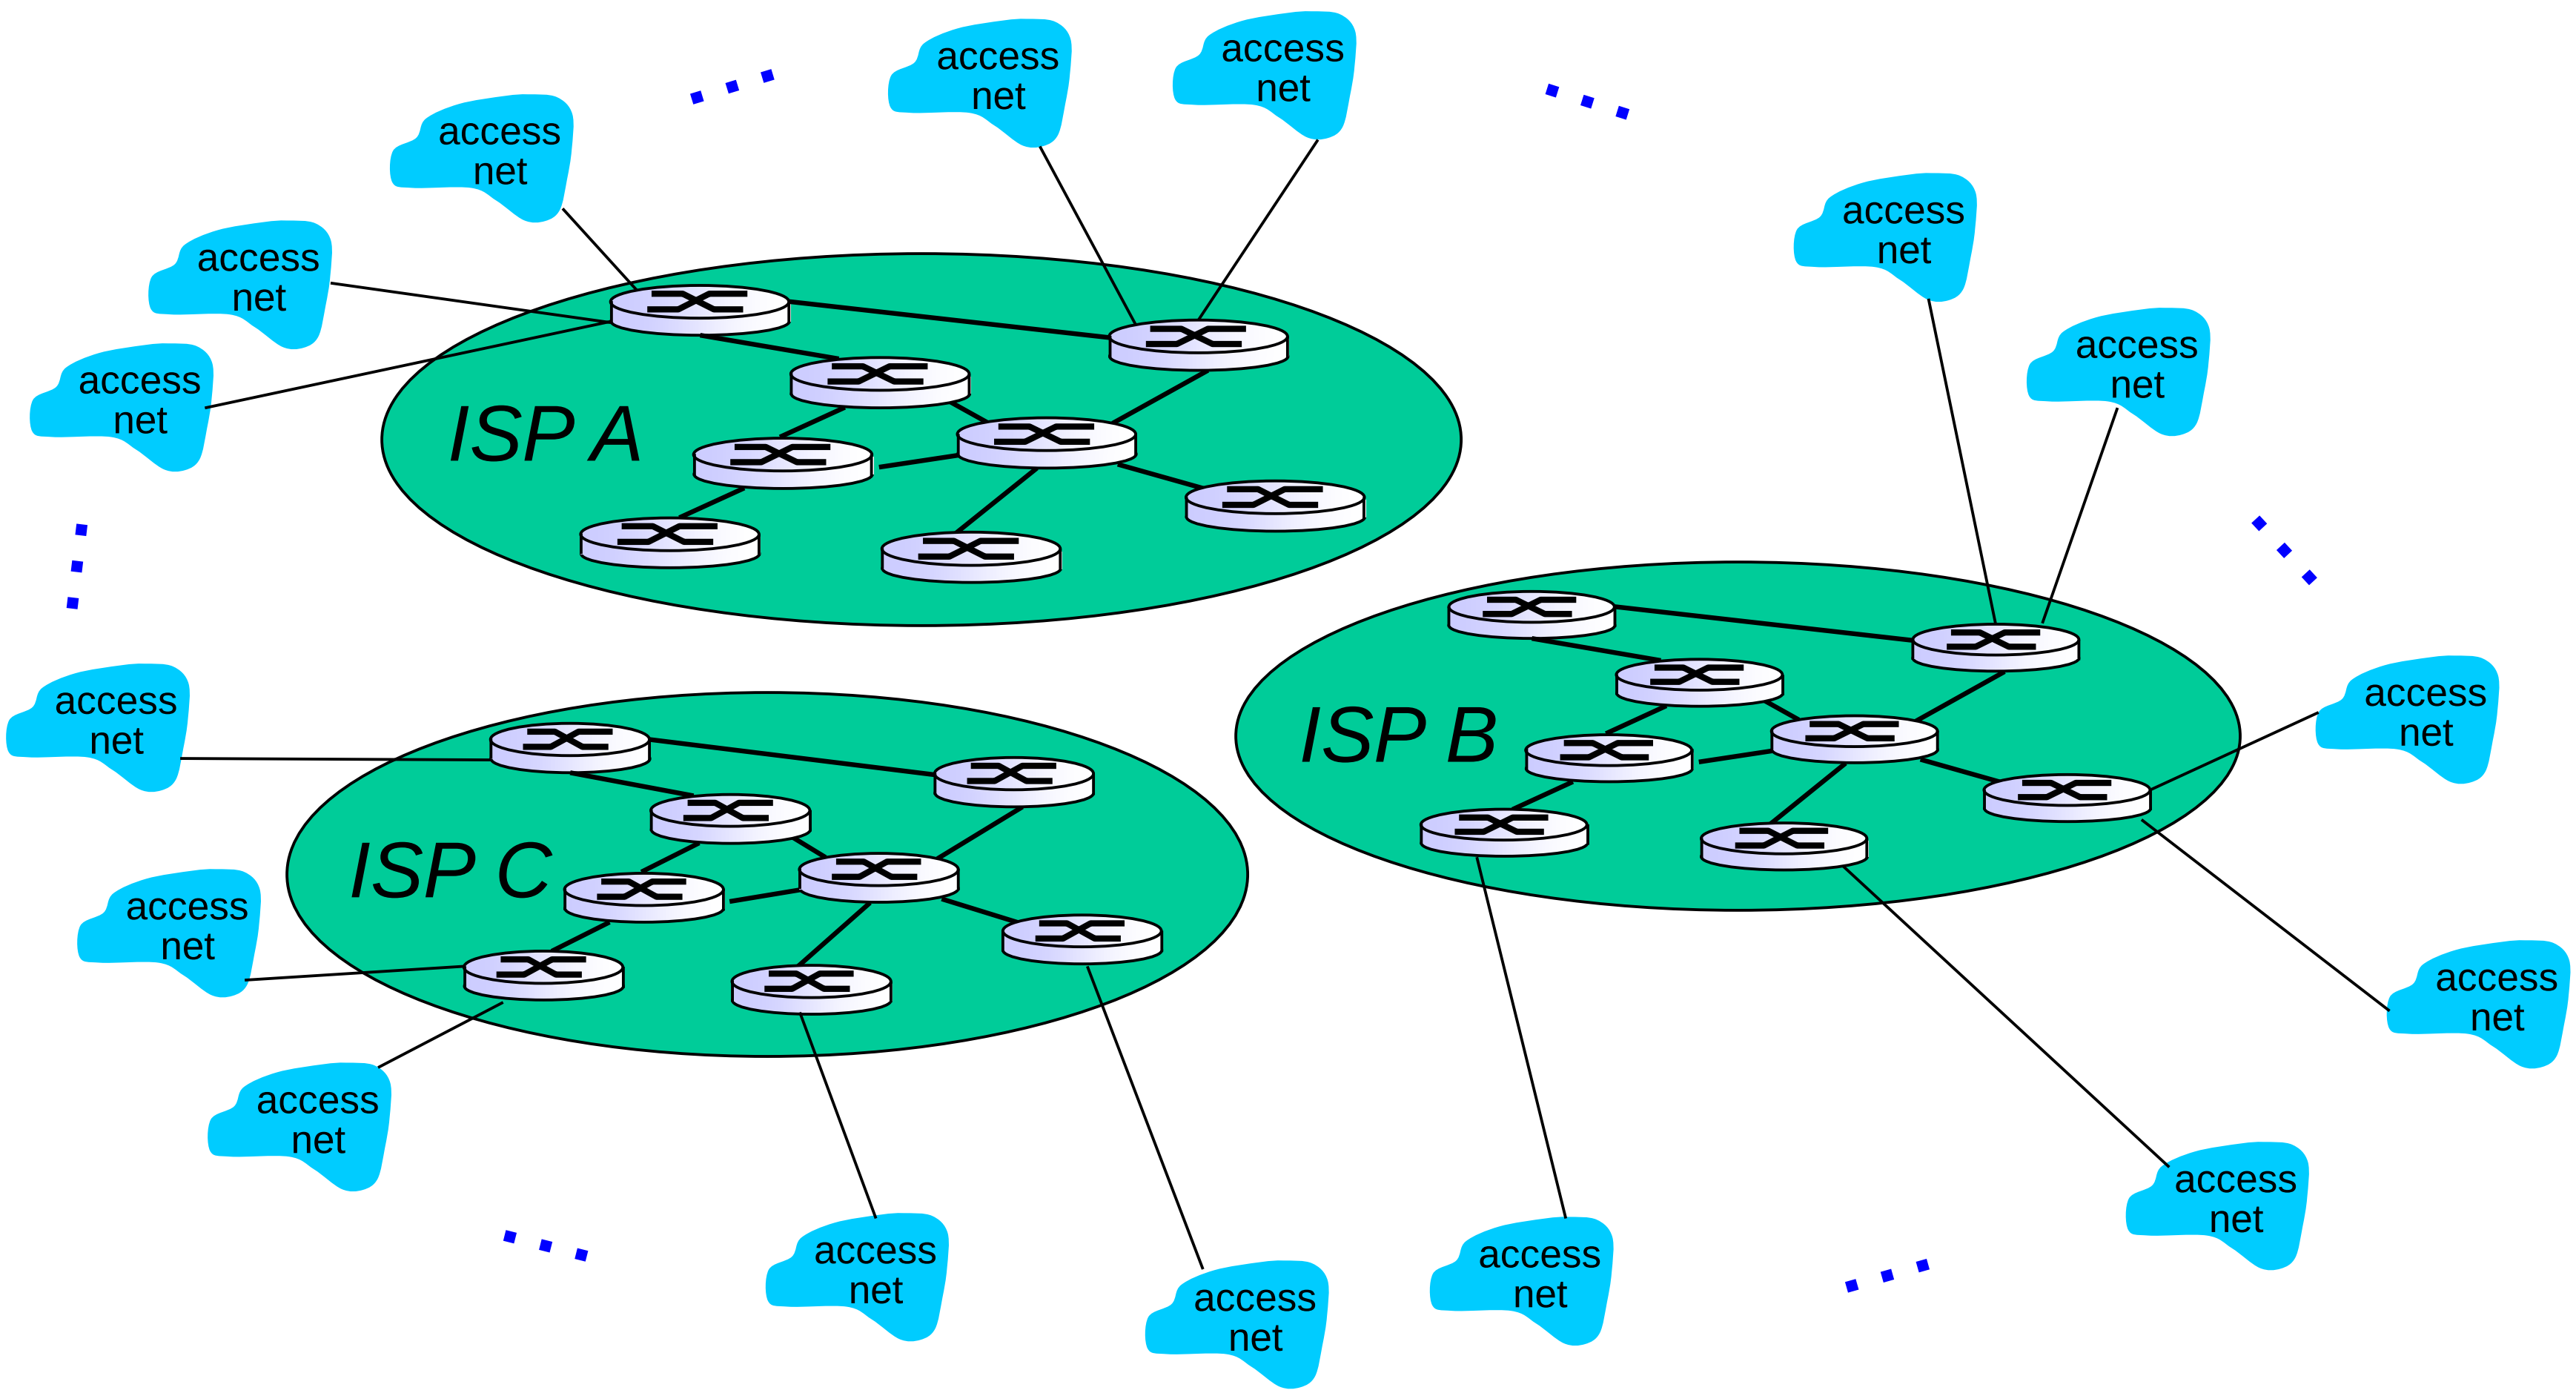

Internet structure: network of networks

But if one global ISP is viable business, there will be competitors …. which must be interconnected

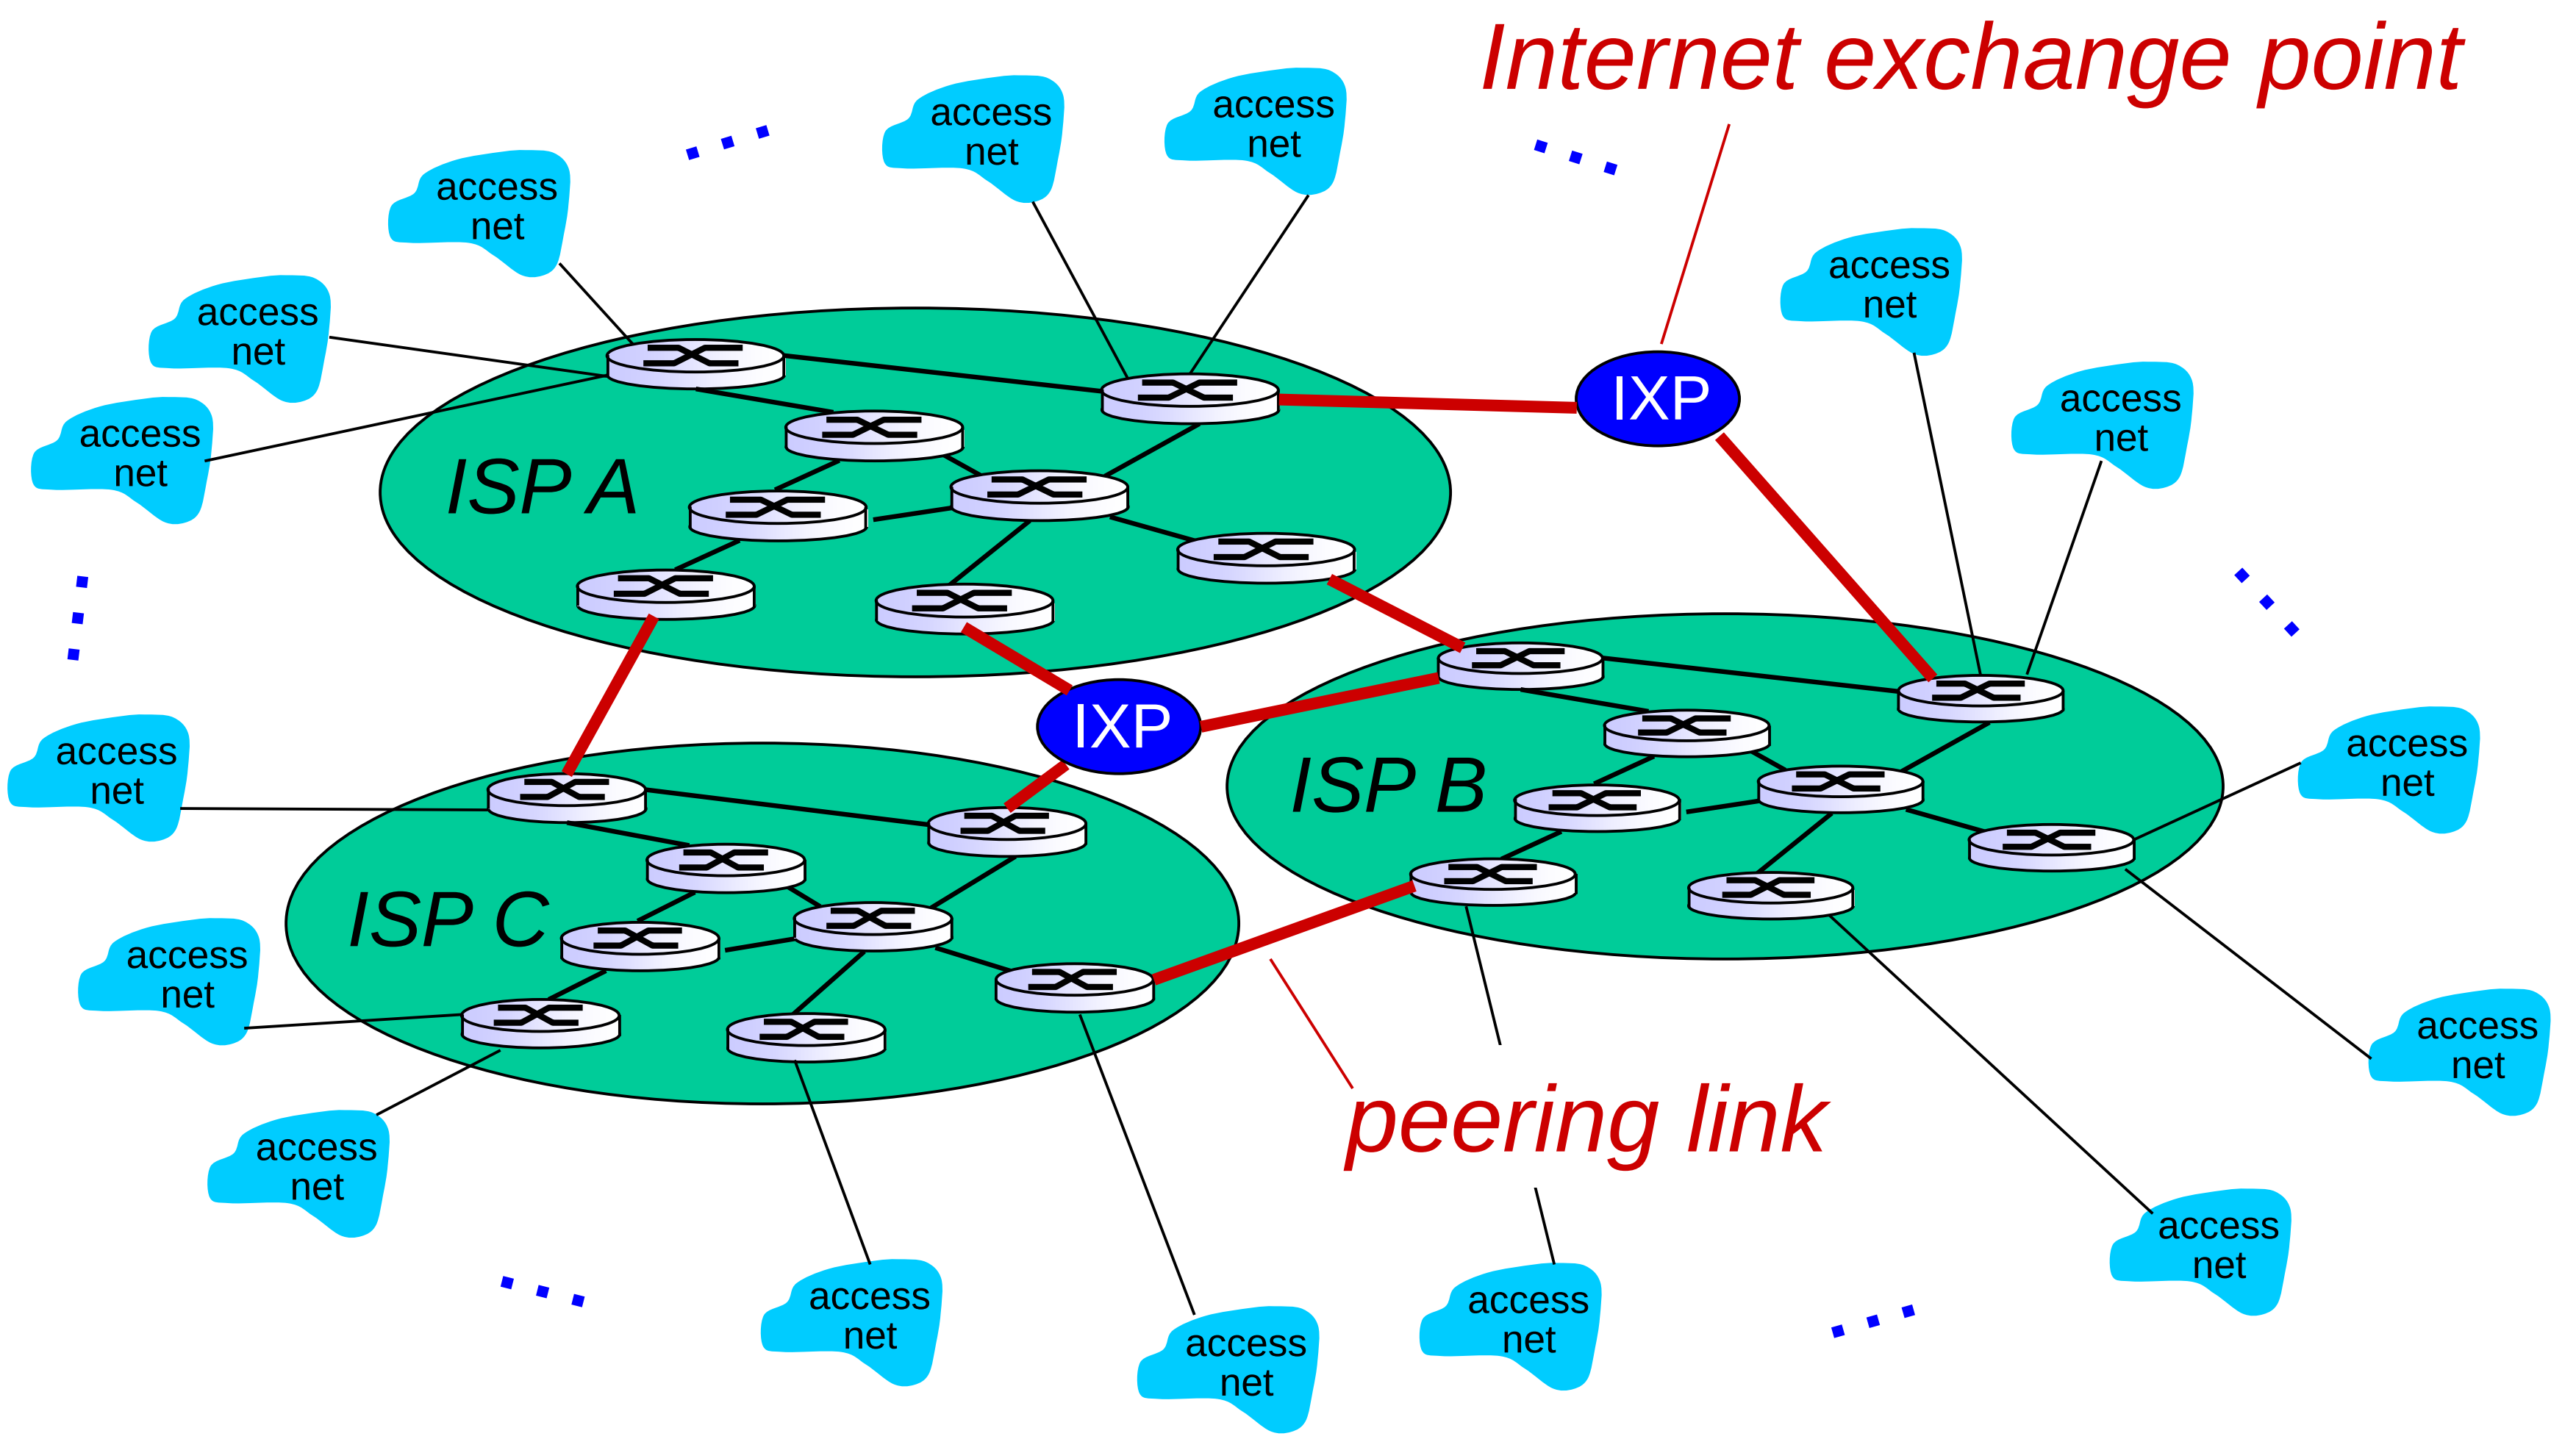

Internet structure: network of networks

… and regional networks may arise to connect access nets to ISPS

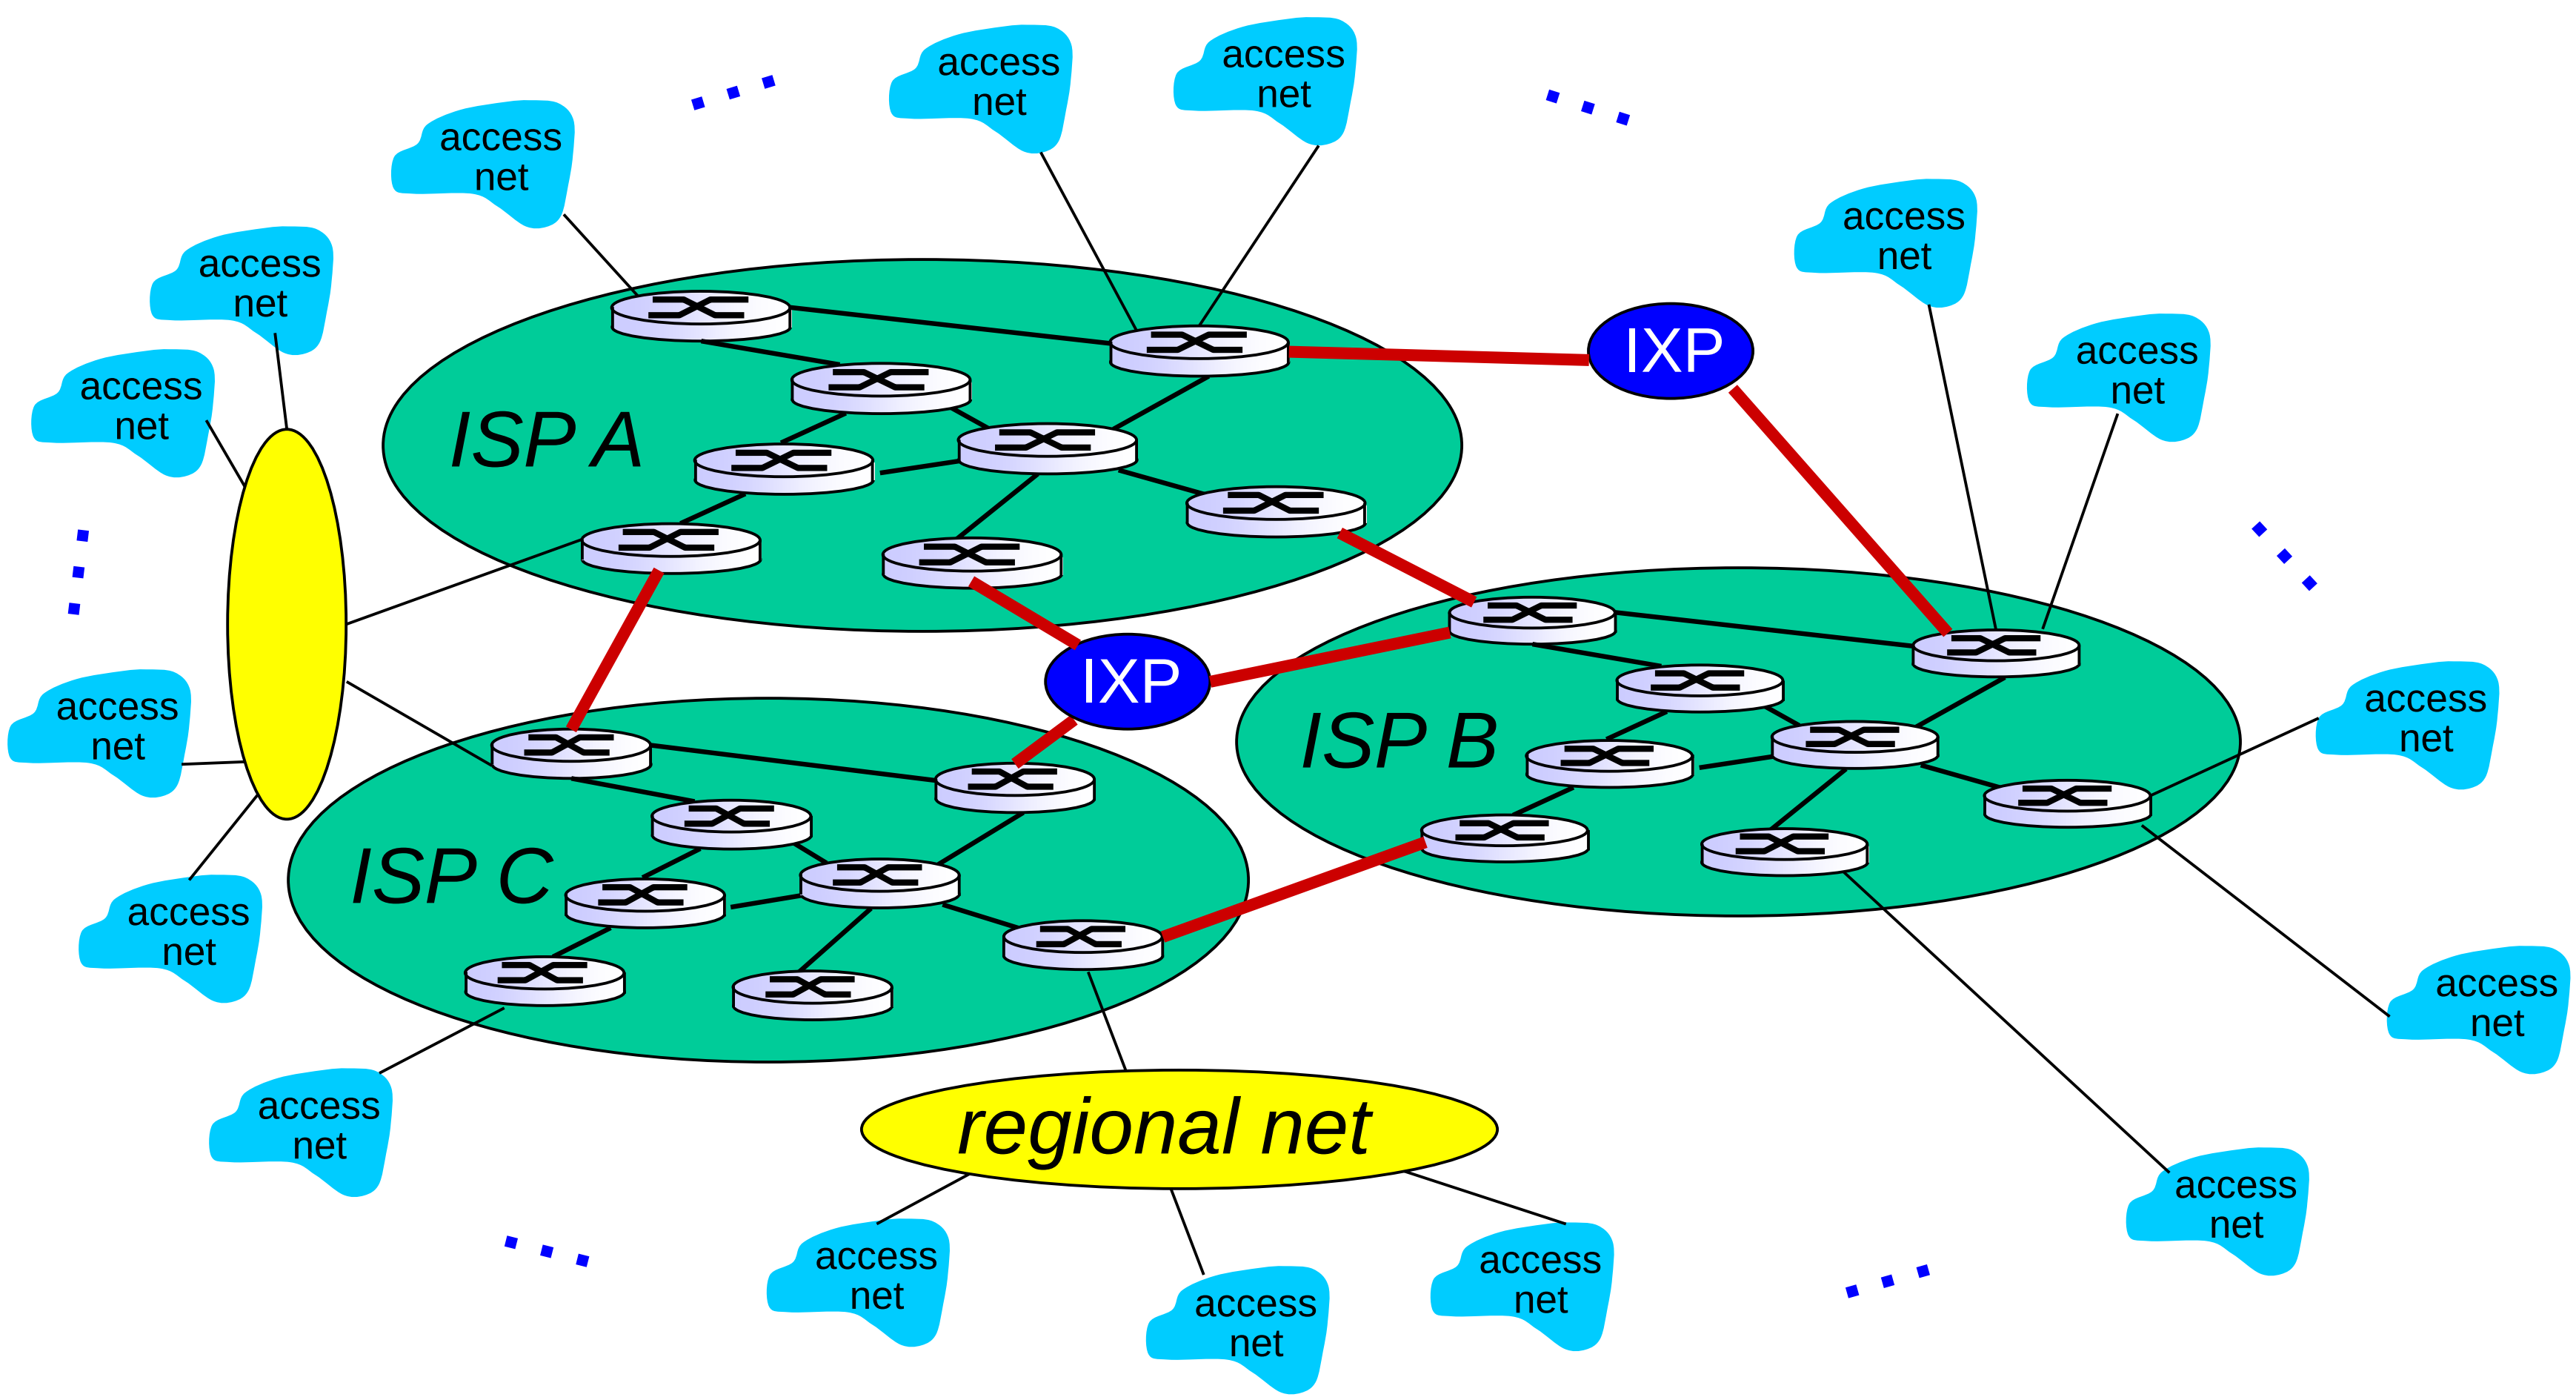

Internet structure: network of networks

… and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

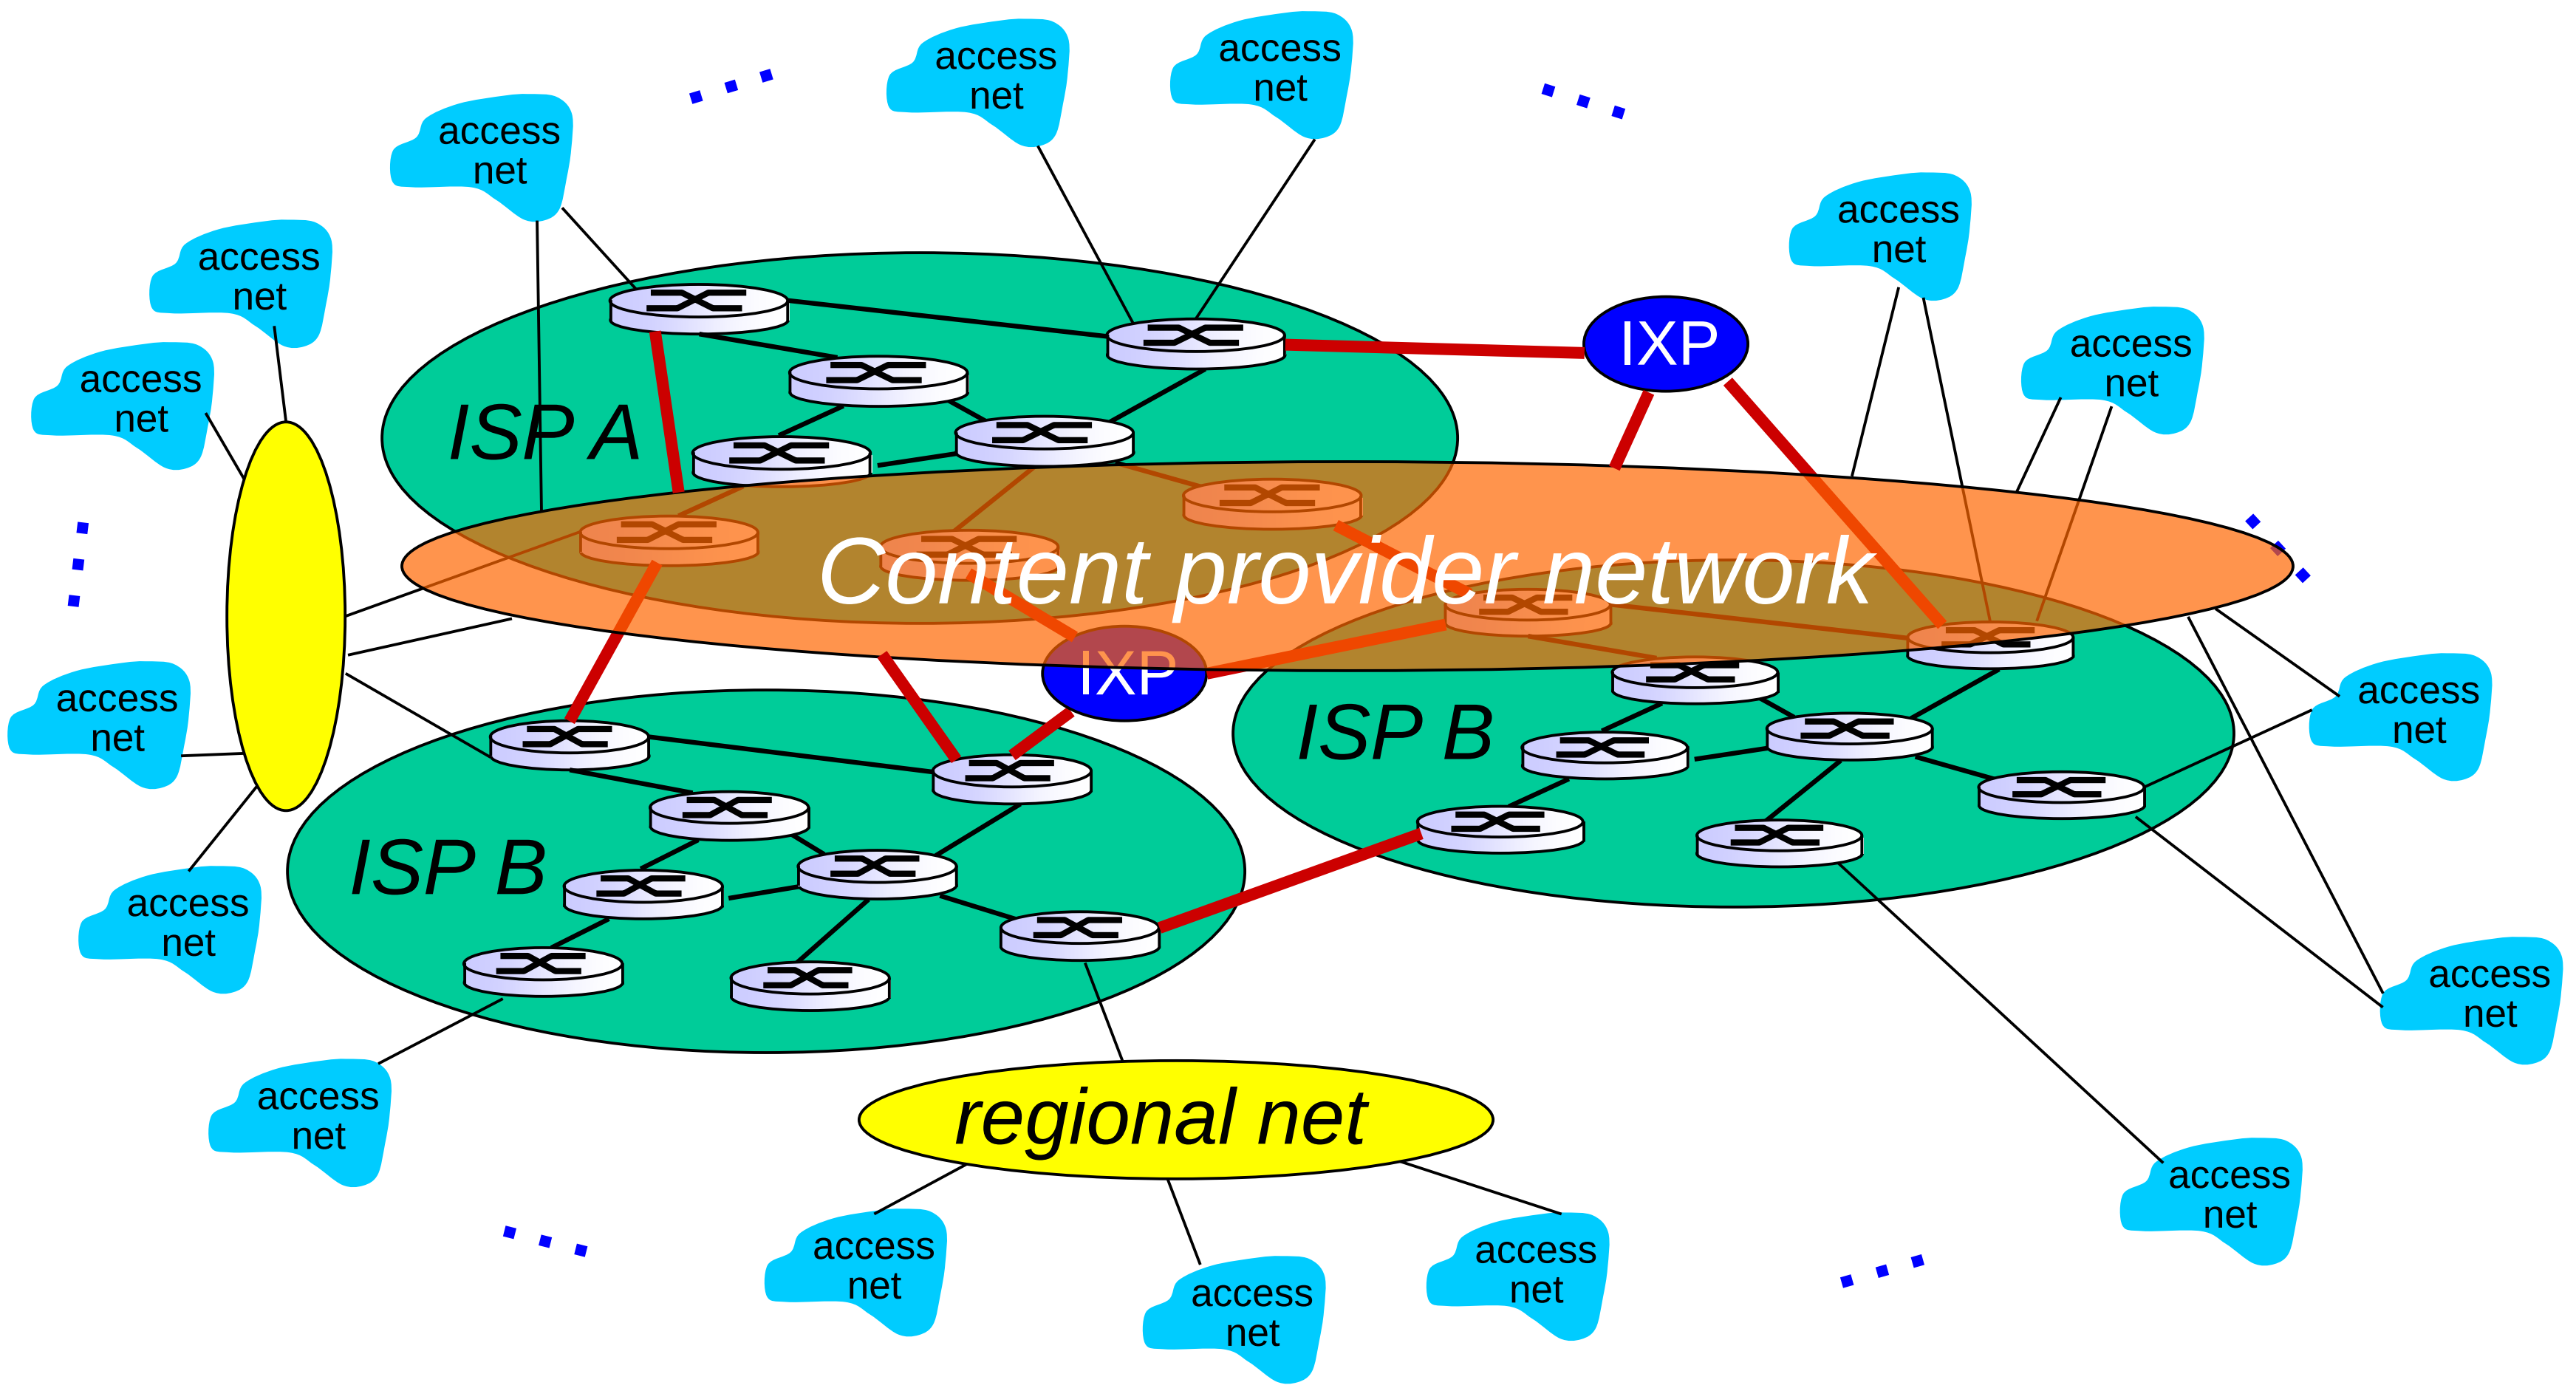

Internet structure: network of networks

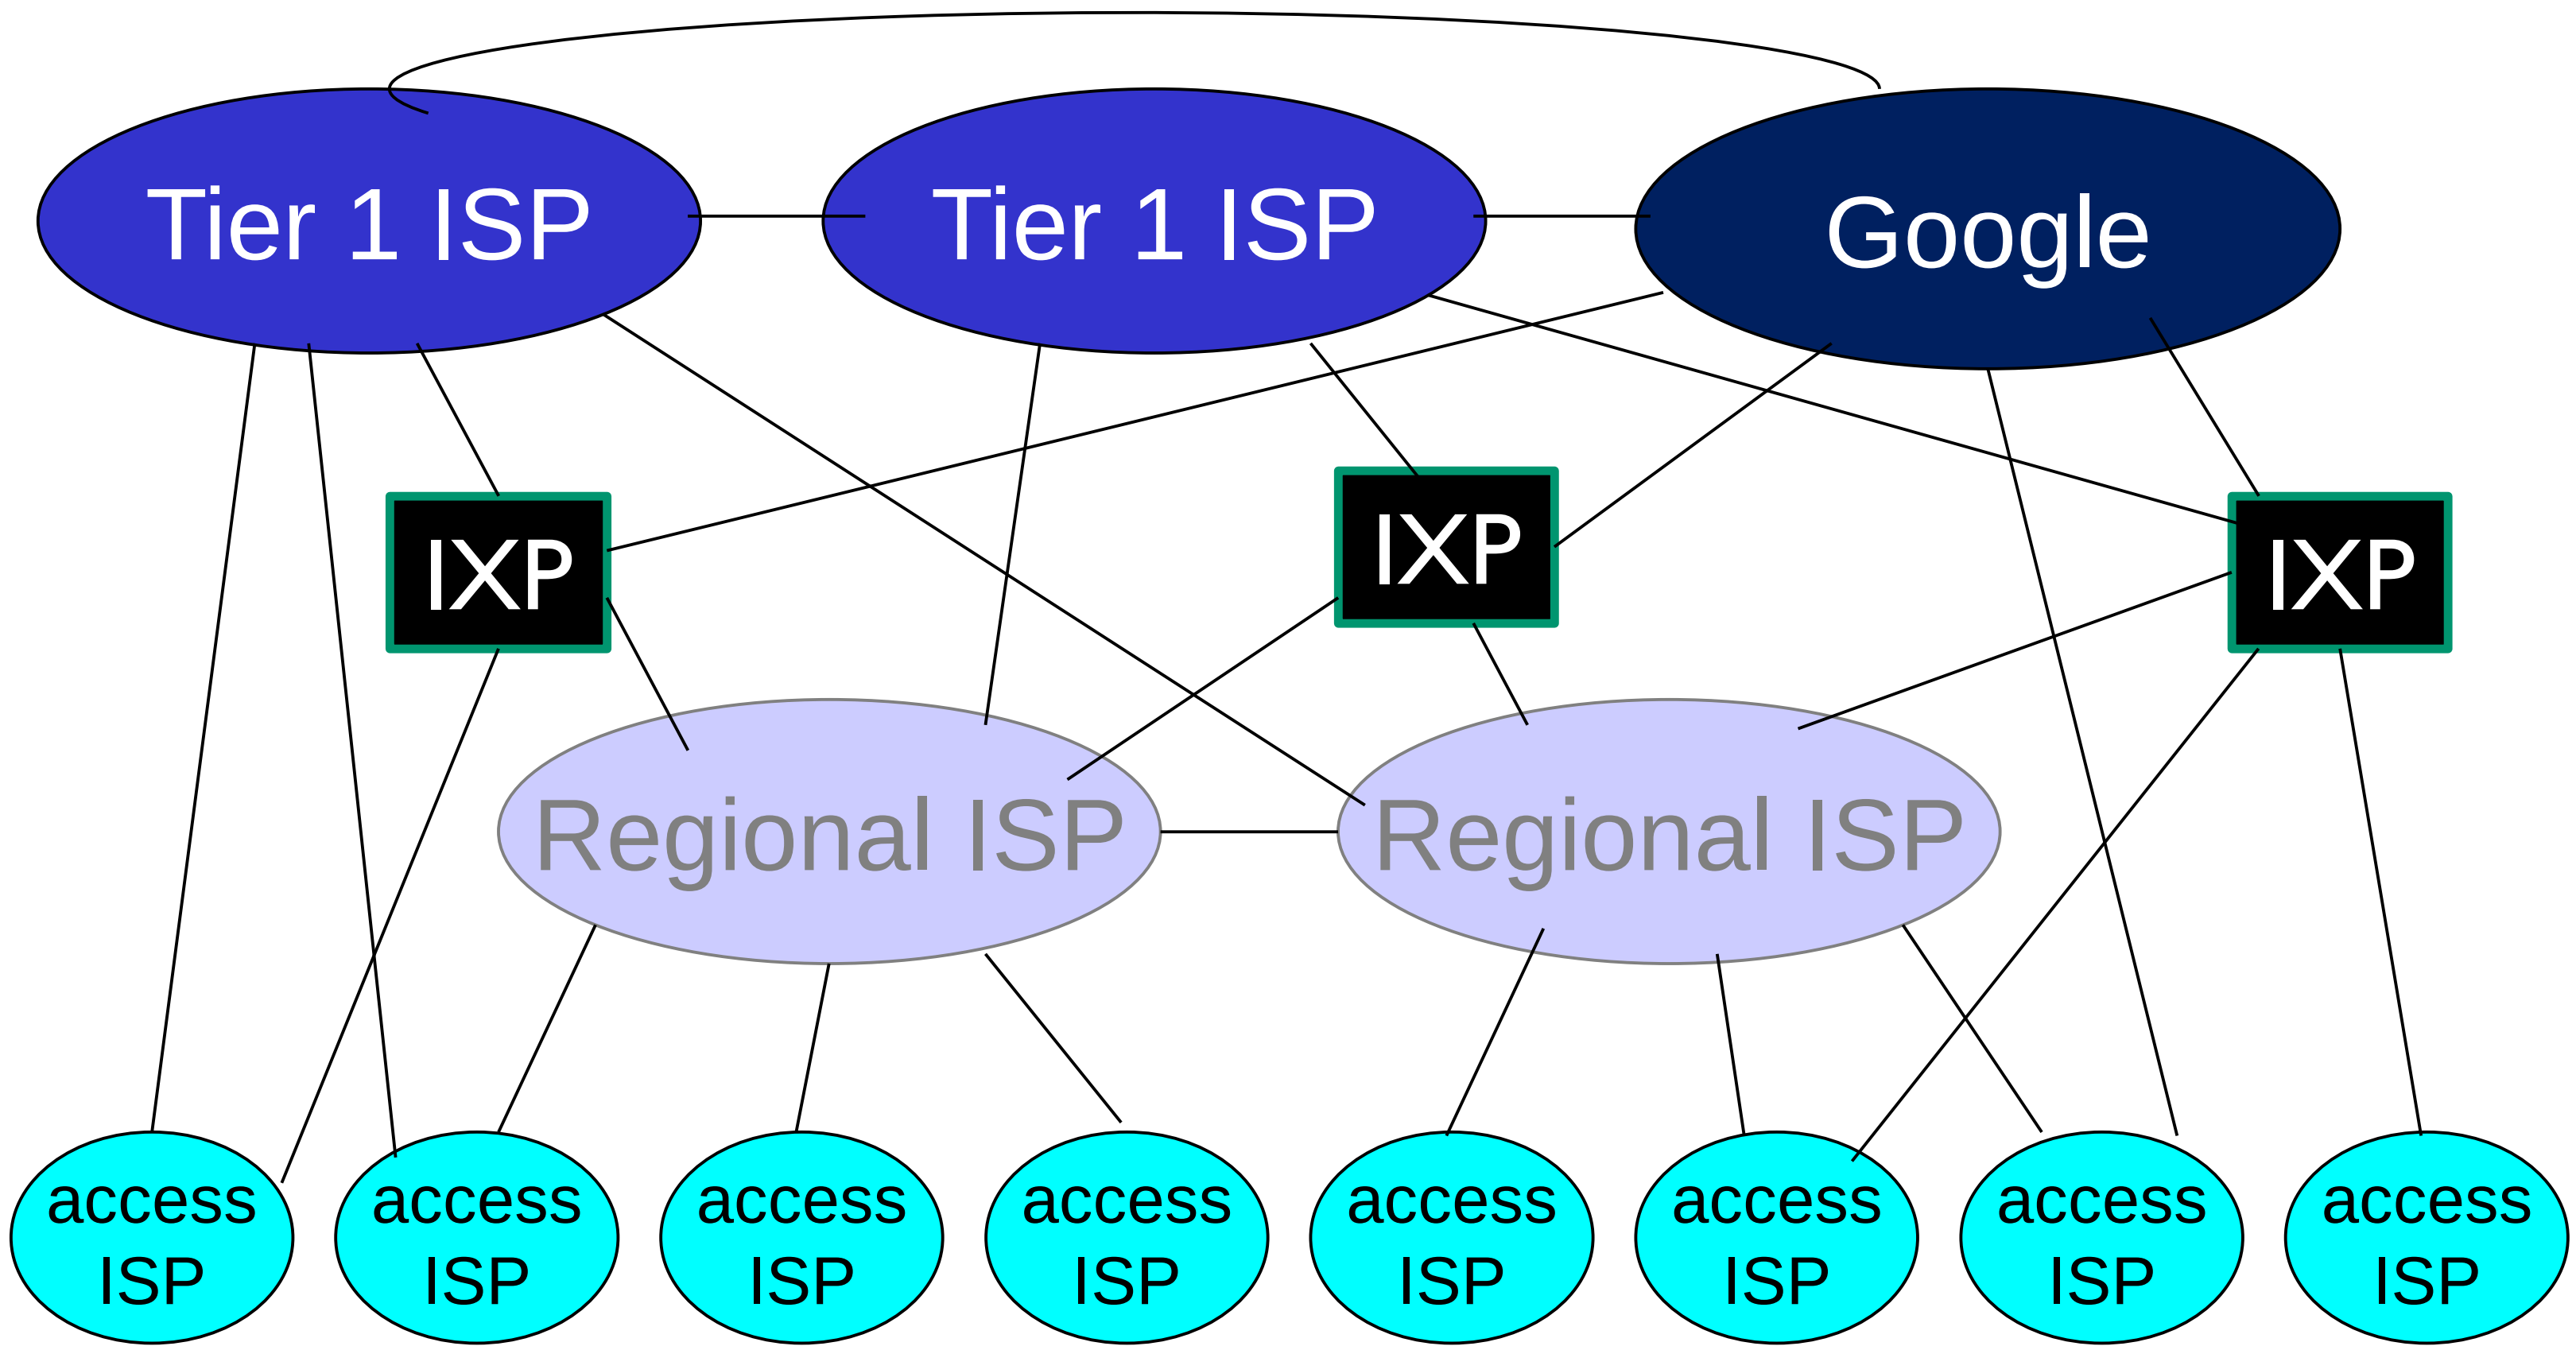

- at center: small # of well-connected large networks
  - "tier-1" commercial ISPs (e.g., Level 3, Sprint, AT&T, NTT), national & international coverage
  - content provider network (e.g, Google): private network that connects it data centers to Internet, often bypassing tier-1, regional ISPs

Tier-1 ISP: e.g., Sprint

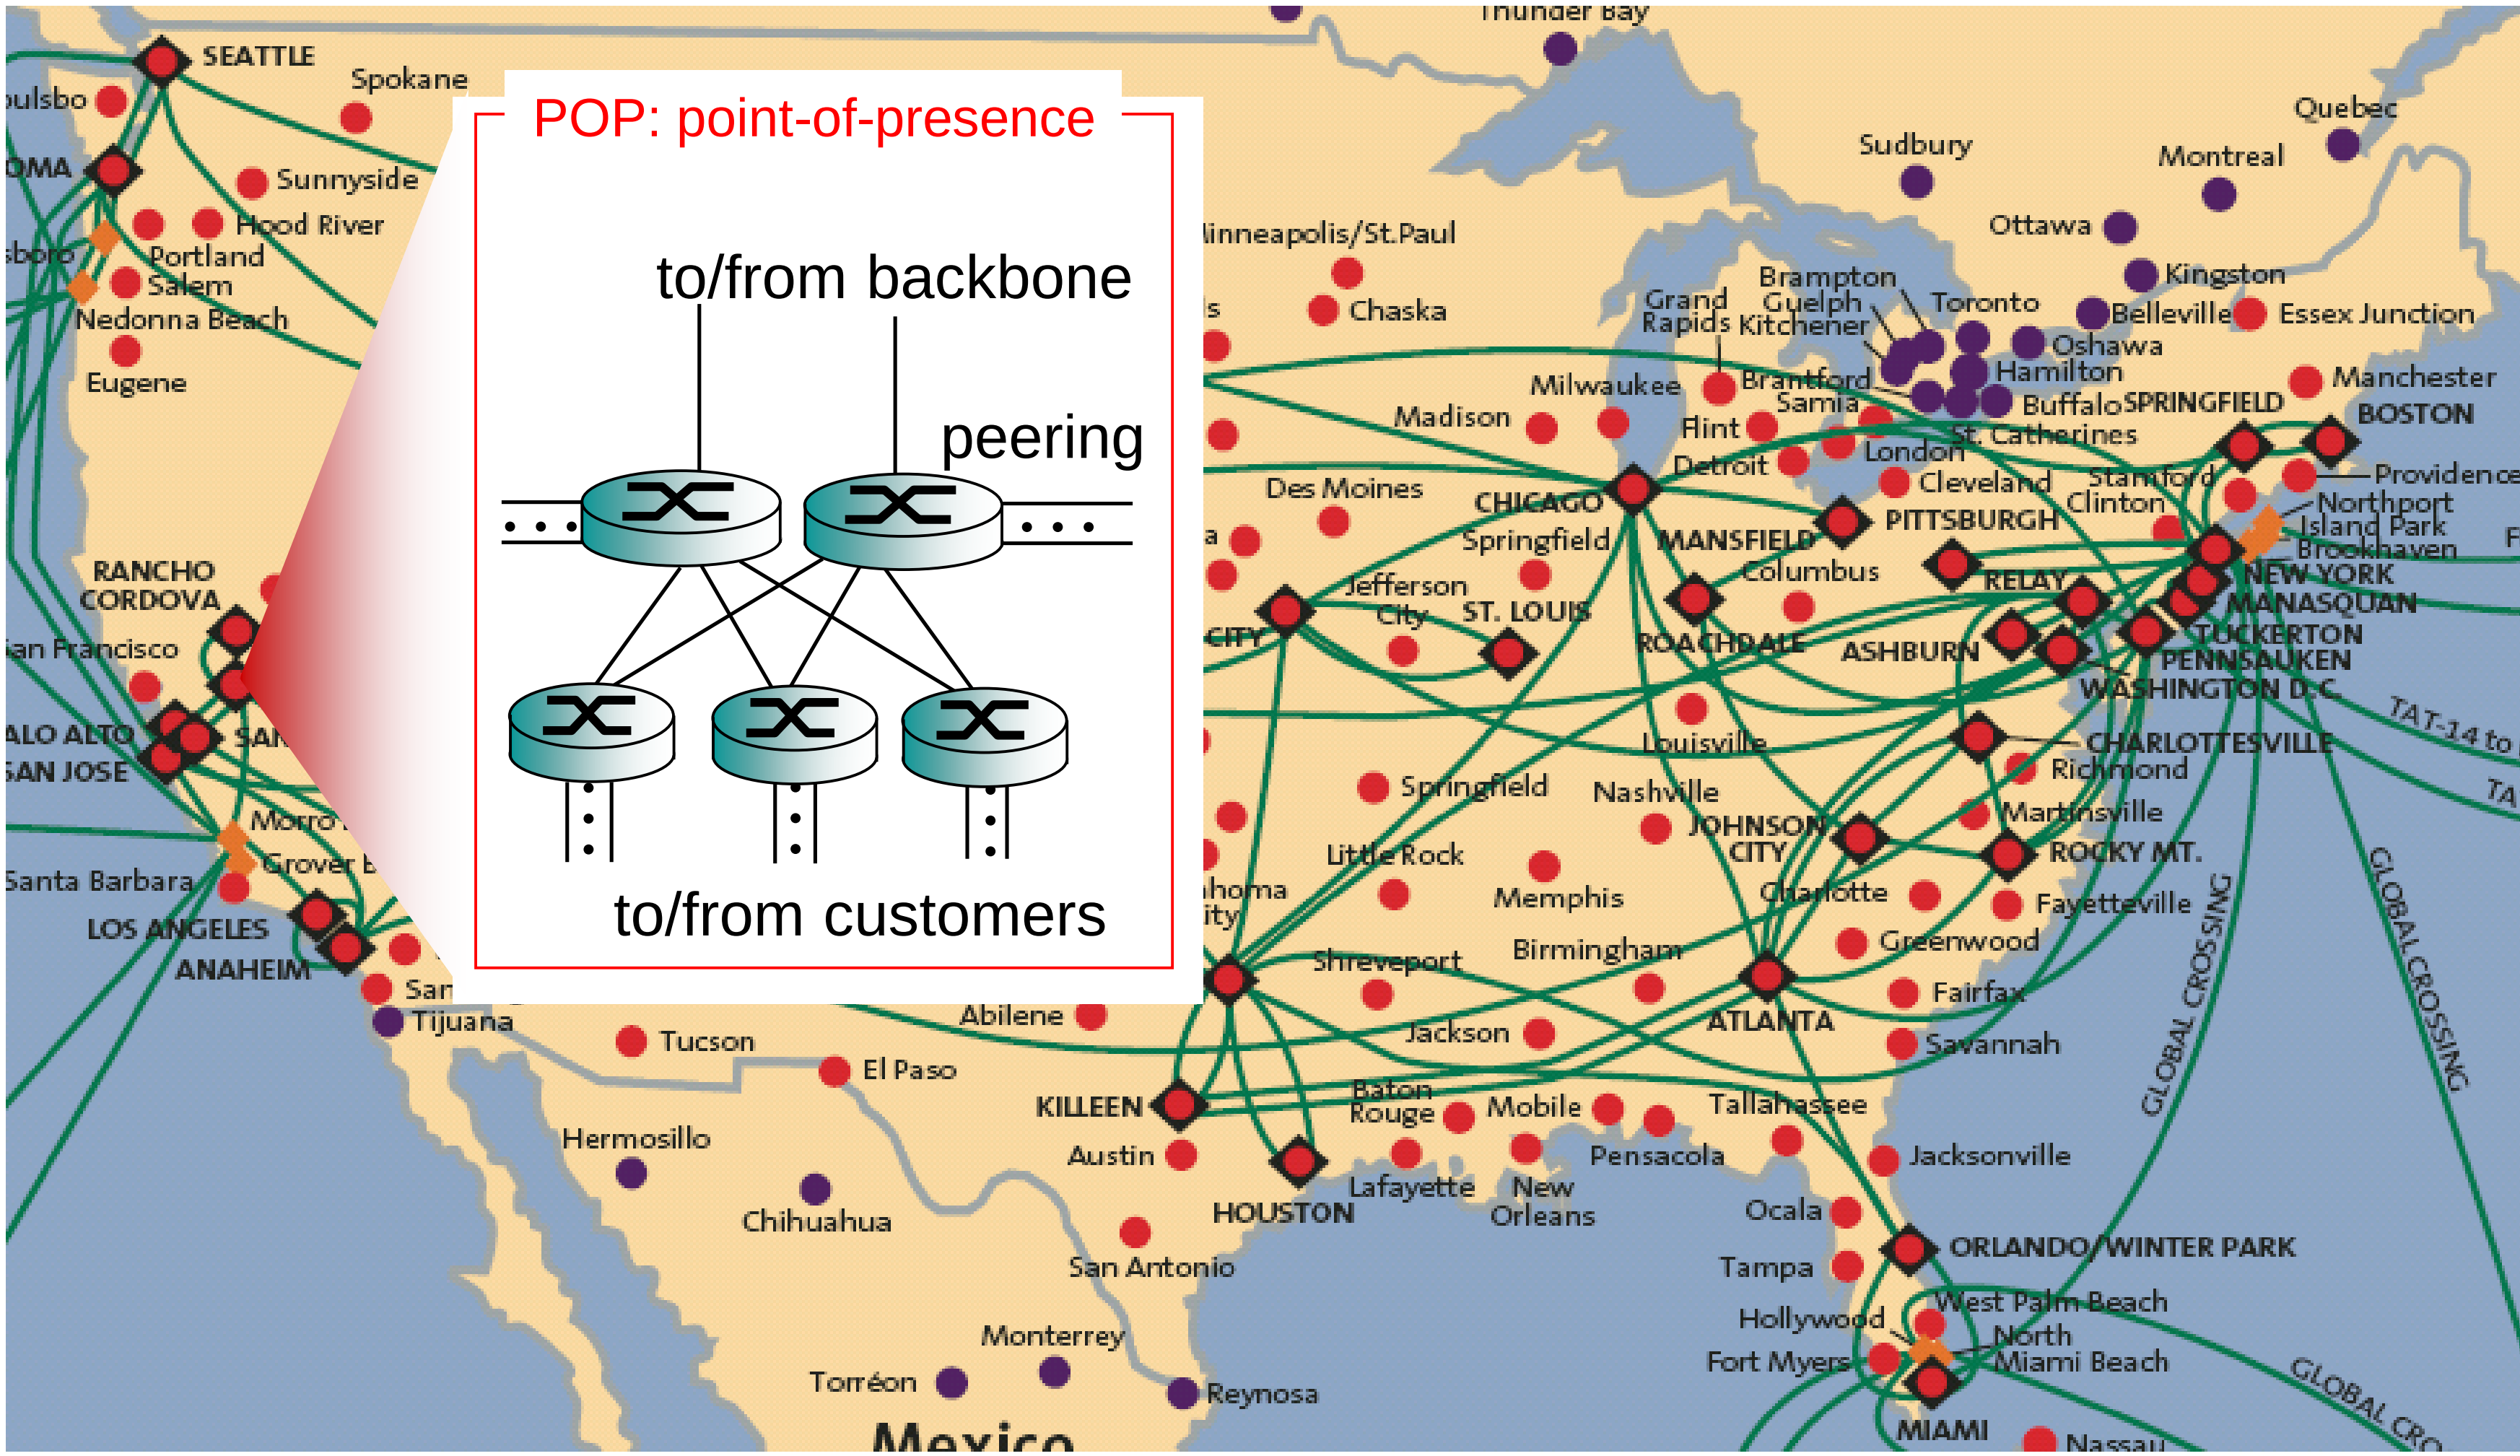

Chapter 1: roadmap

1.1 what *is* the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

How do loss and delay occur?

packets *queue* in router buffers

- packet arrival rate to link (temporarily) exceeds output link capacity
- packets queue, wait for turn

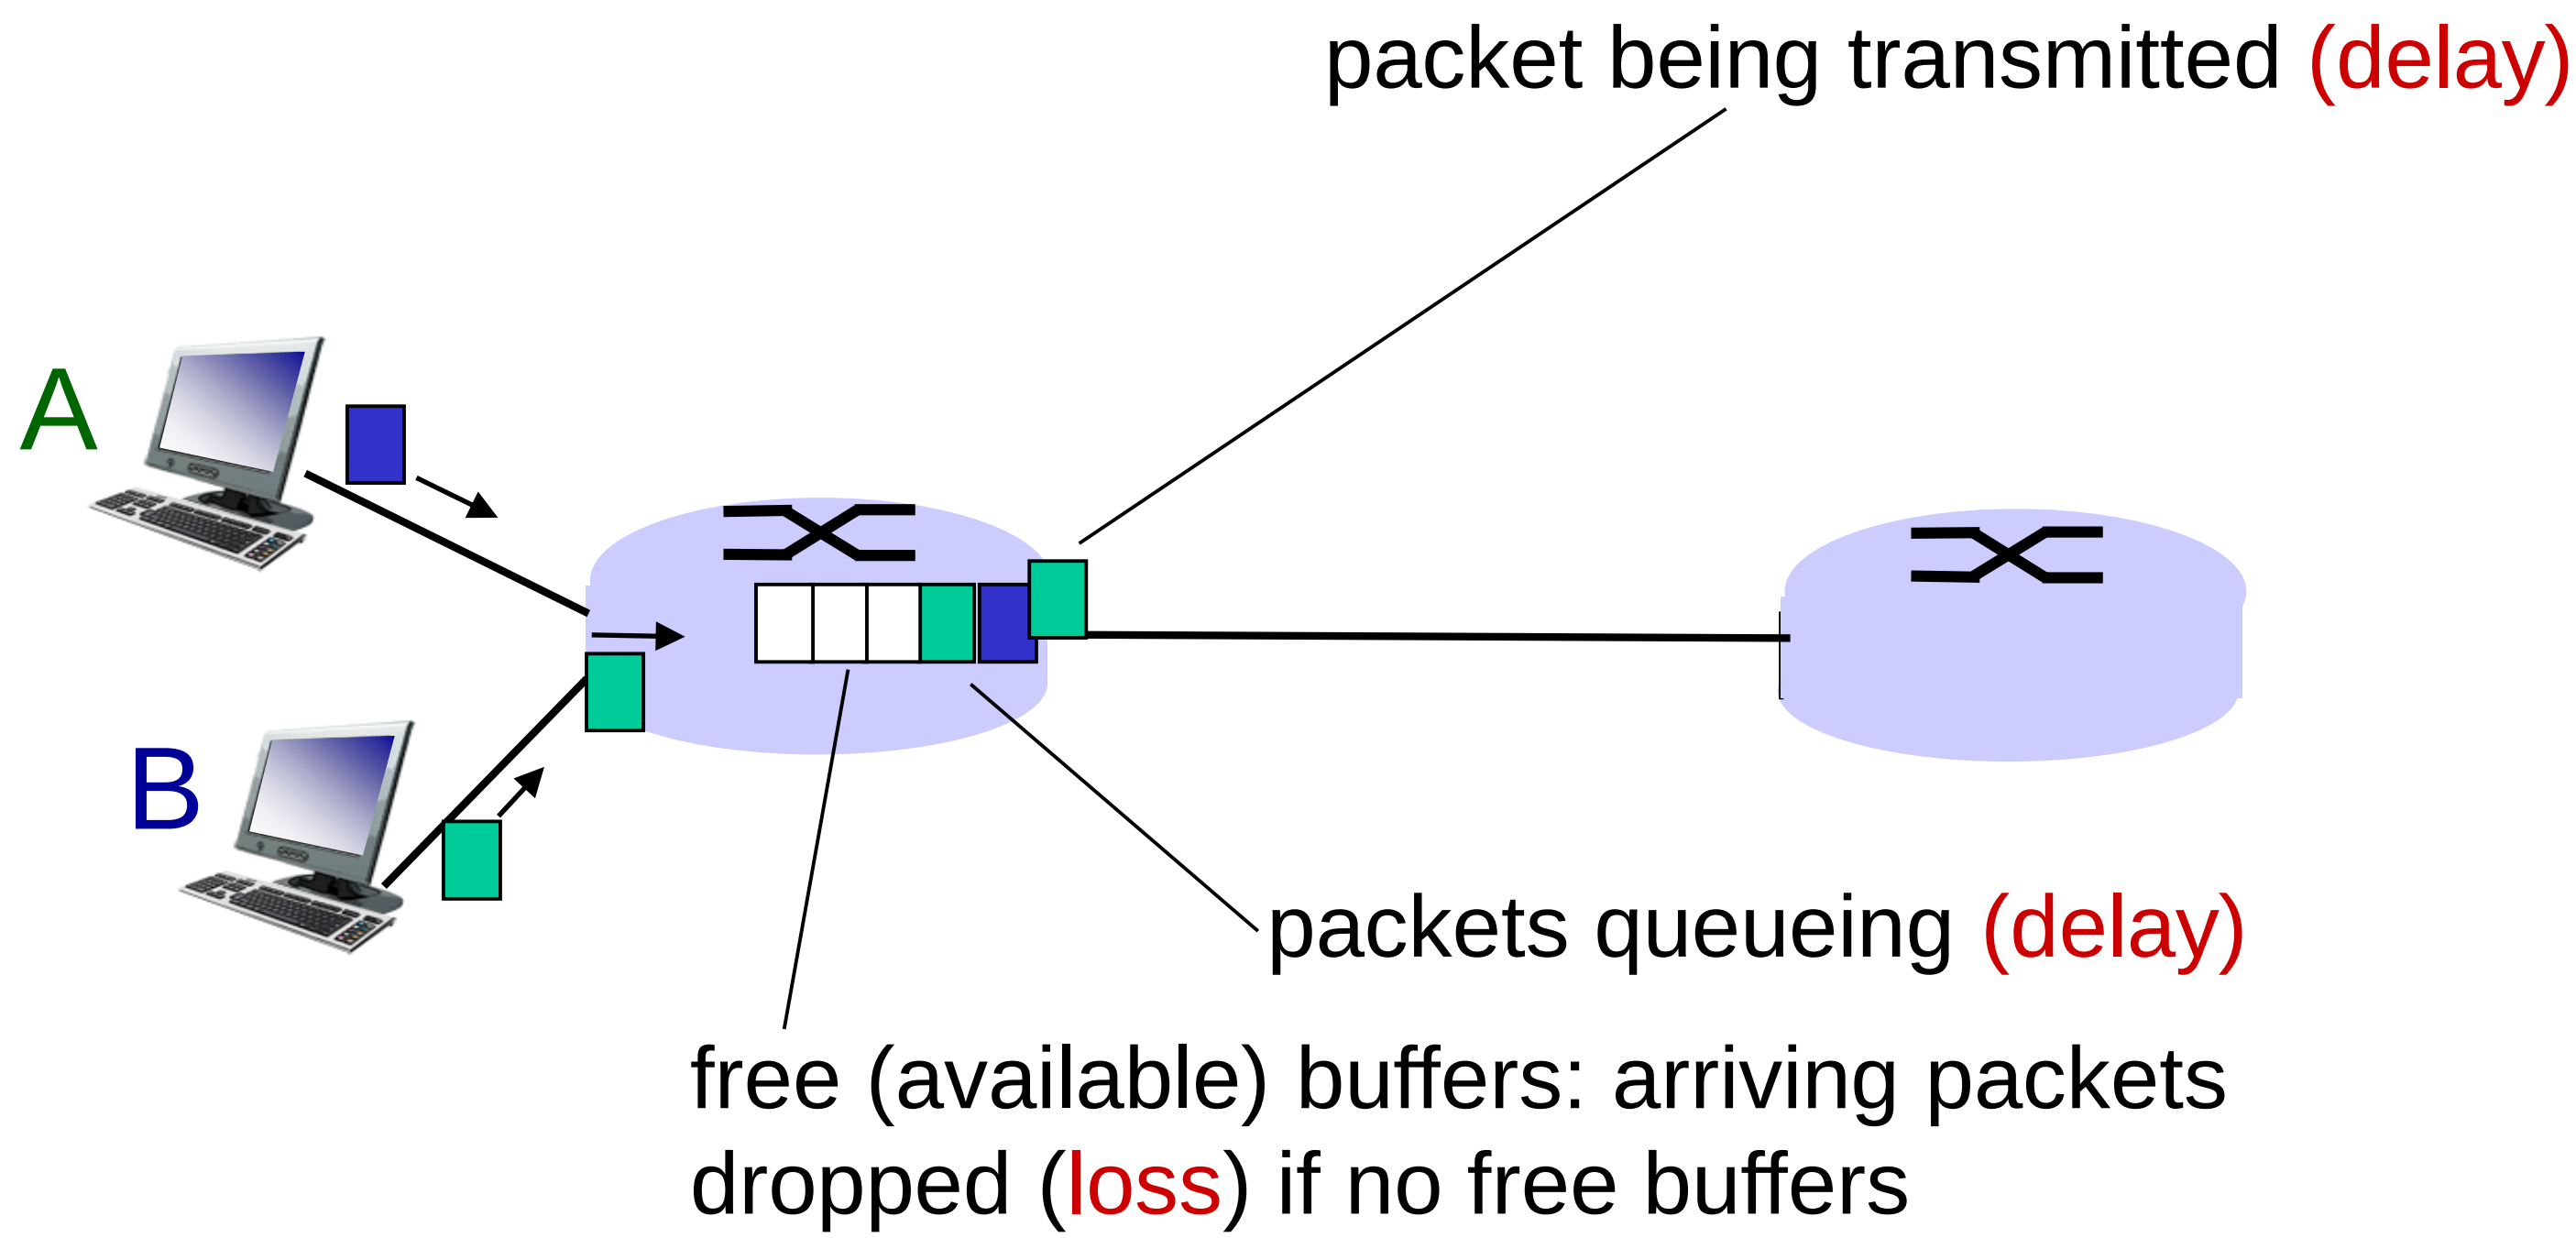

Four sources of packet delay

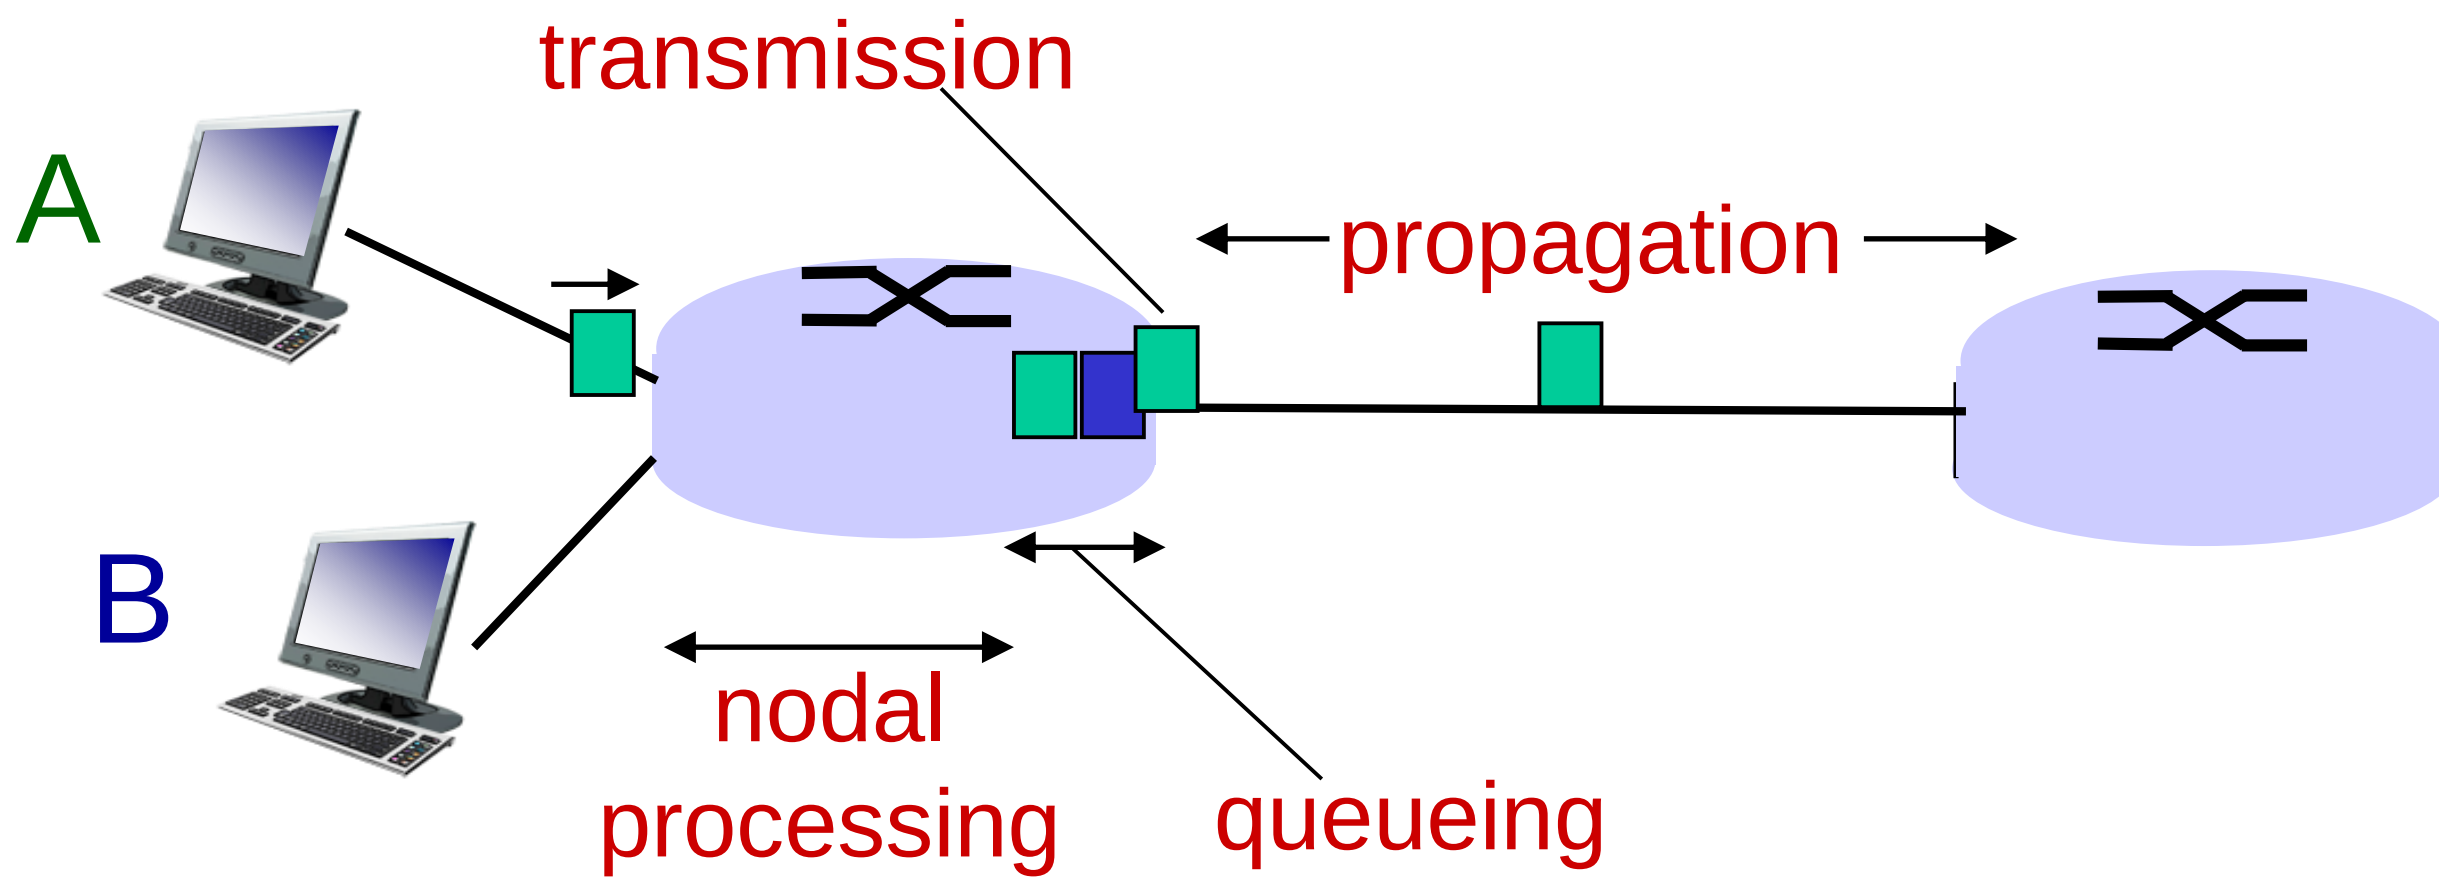

$$d_{nodal} = d_{proc} + d_{queue} + d_{trans} + d_{prop}$$

d_{proc}: nodal processing

- check bit errors
- determine output link
- typically < msec

d_{queue}: queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

Four sources of packet delay

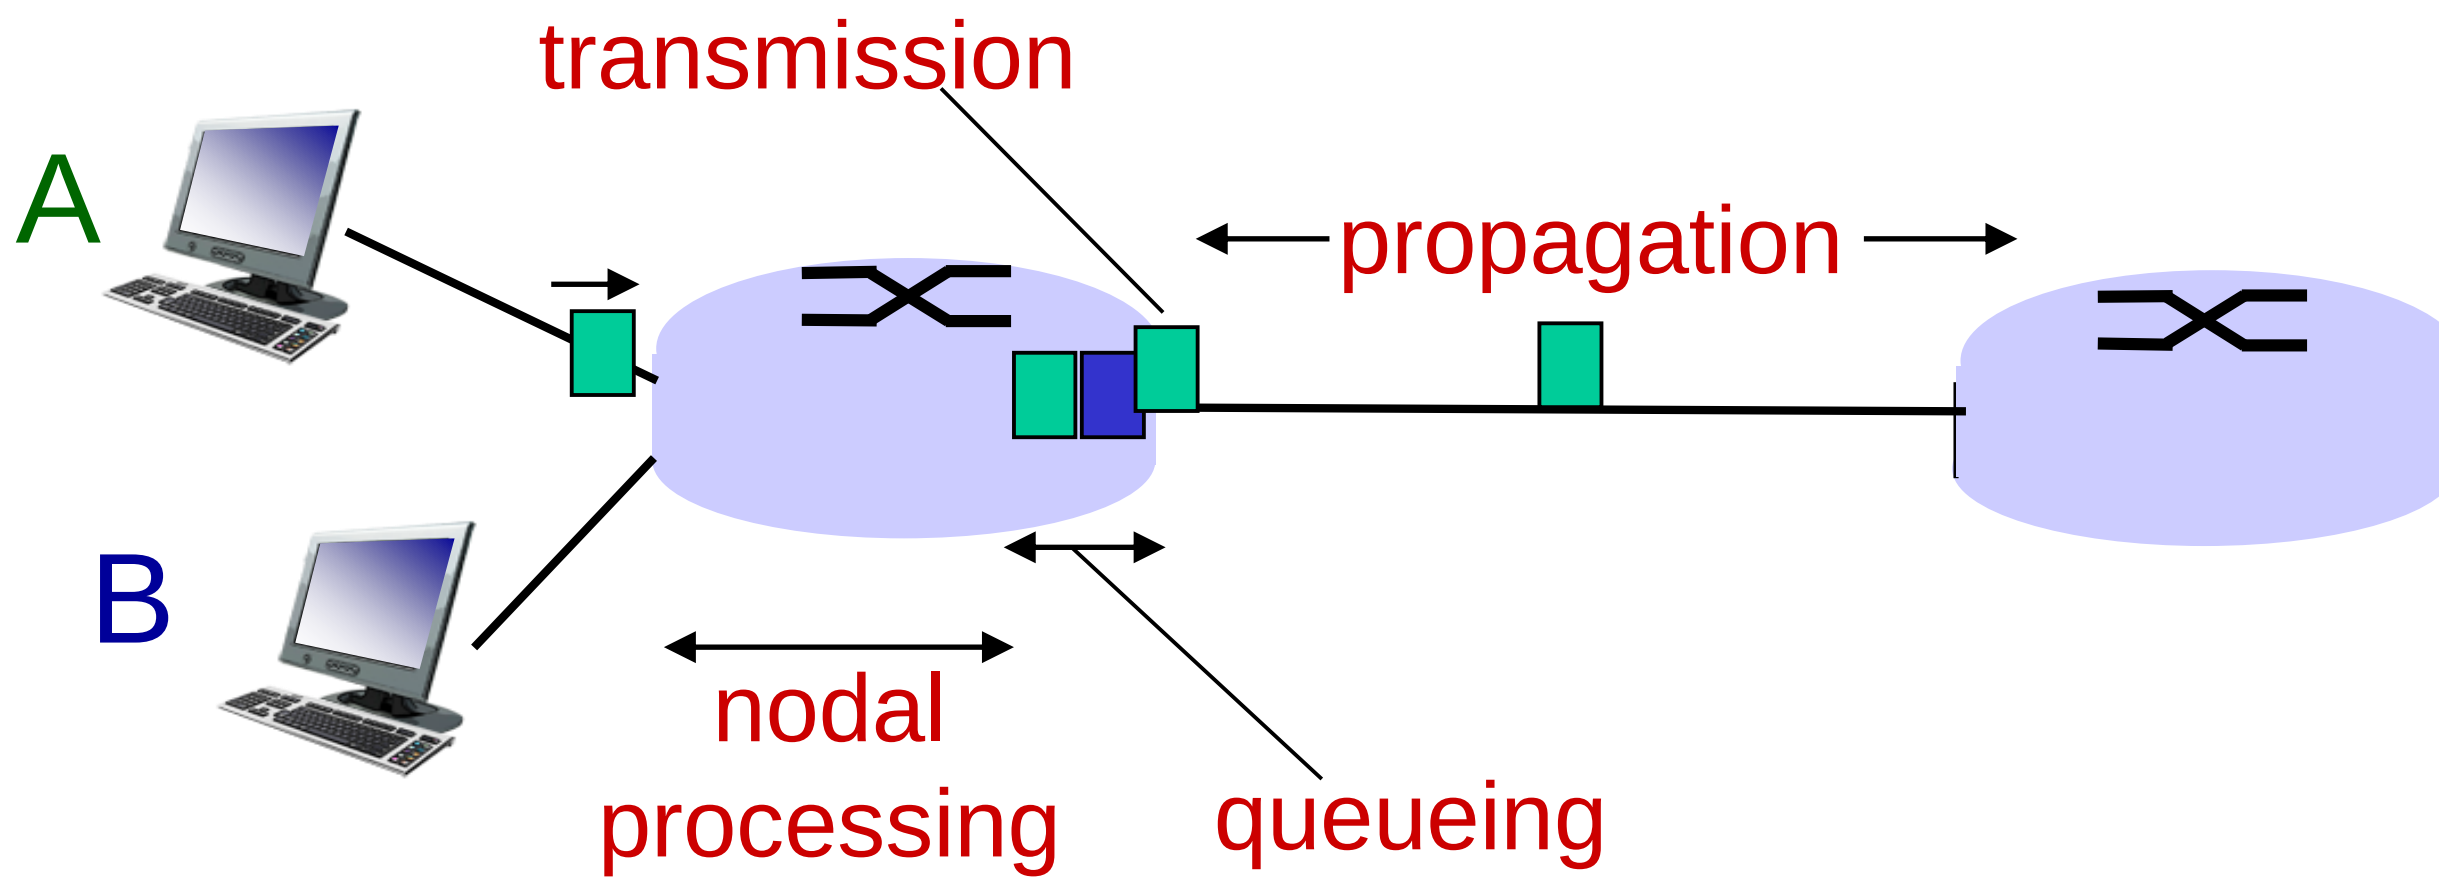

$$d_{nodal} = d_{proc} + d_{queue} + d_{trans} + d_{prop}$$

d_{trans}: transmission delay:

- *L*: packet length (bits)
- *R*: link *bandwidth (bps)*
- $d_{trans} = L/R$

d_{trans} and d_{prop} *very* different

d_{prop}: propagation delay:

- *d*: length of physical link
- *s*: propagation speed in medium ($\sim 2 \times 10^8$ m/sec)
- $d_{prop} = d/s$

Caravan analogy

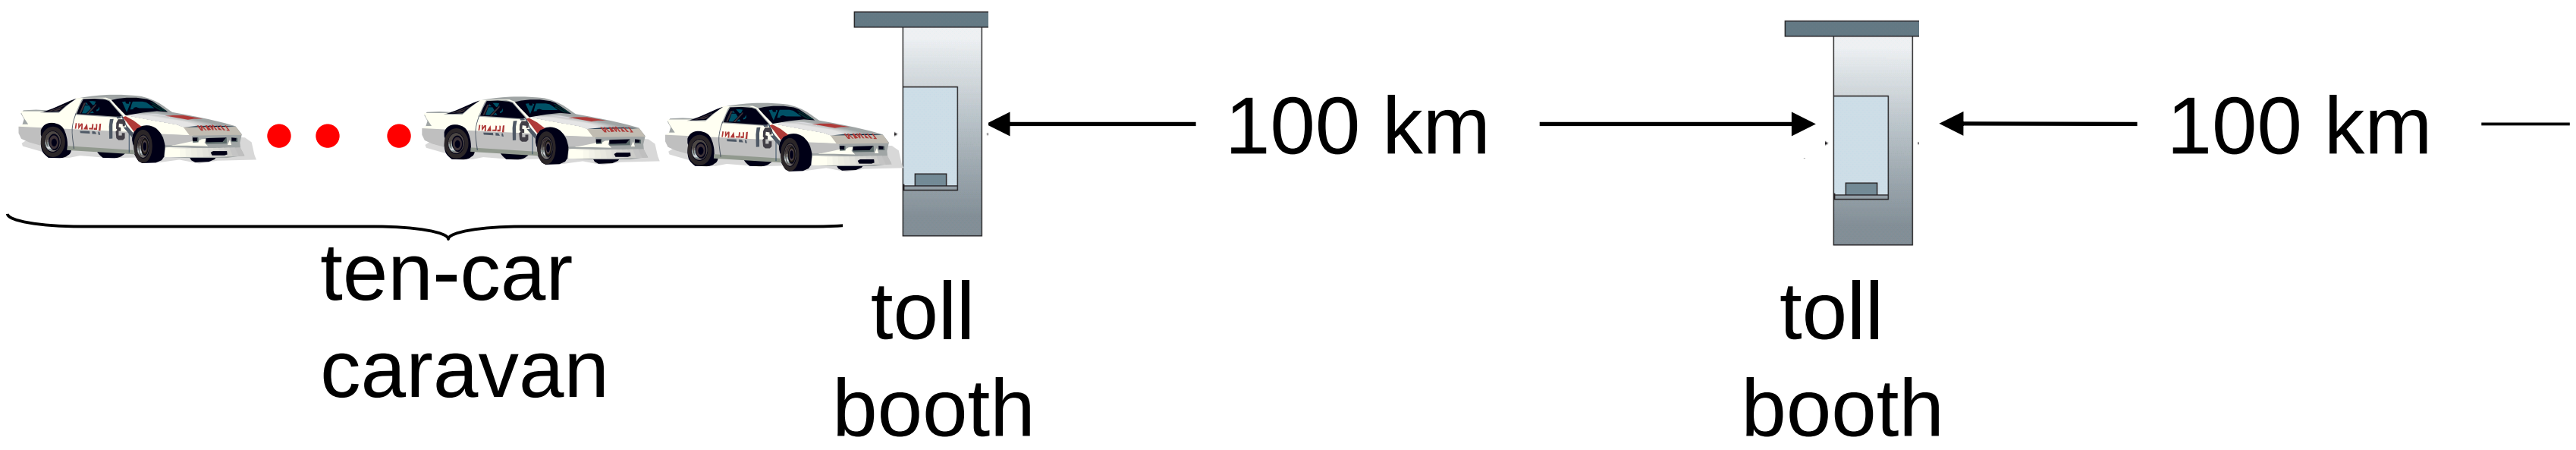

- cars "propagate" at 100 km/hr
- toll booth takes 12 sec to service car (bit transmission time)
- car~bit; caravan ~ packet
- Q: How long until caravan is lined up before 2nd toll booth?

- time to "push" entire caravan through toll booth onto highway = 12*10 = 120 sec
- time for last car to propagate from 1st to 2nd toll both: 100km/(100km/hr)= 1 hr
- *A:* 62 minutes

Caravan analogy (more)

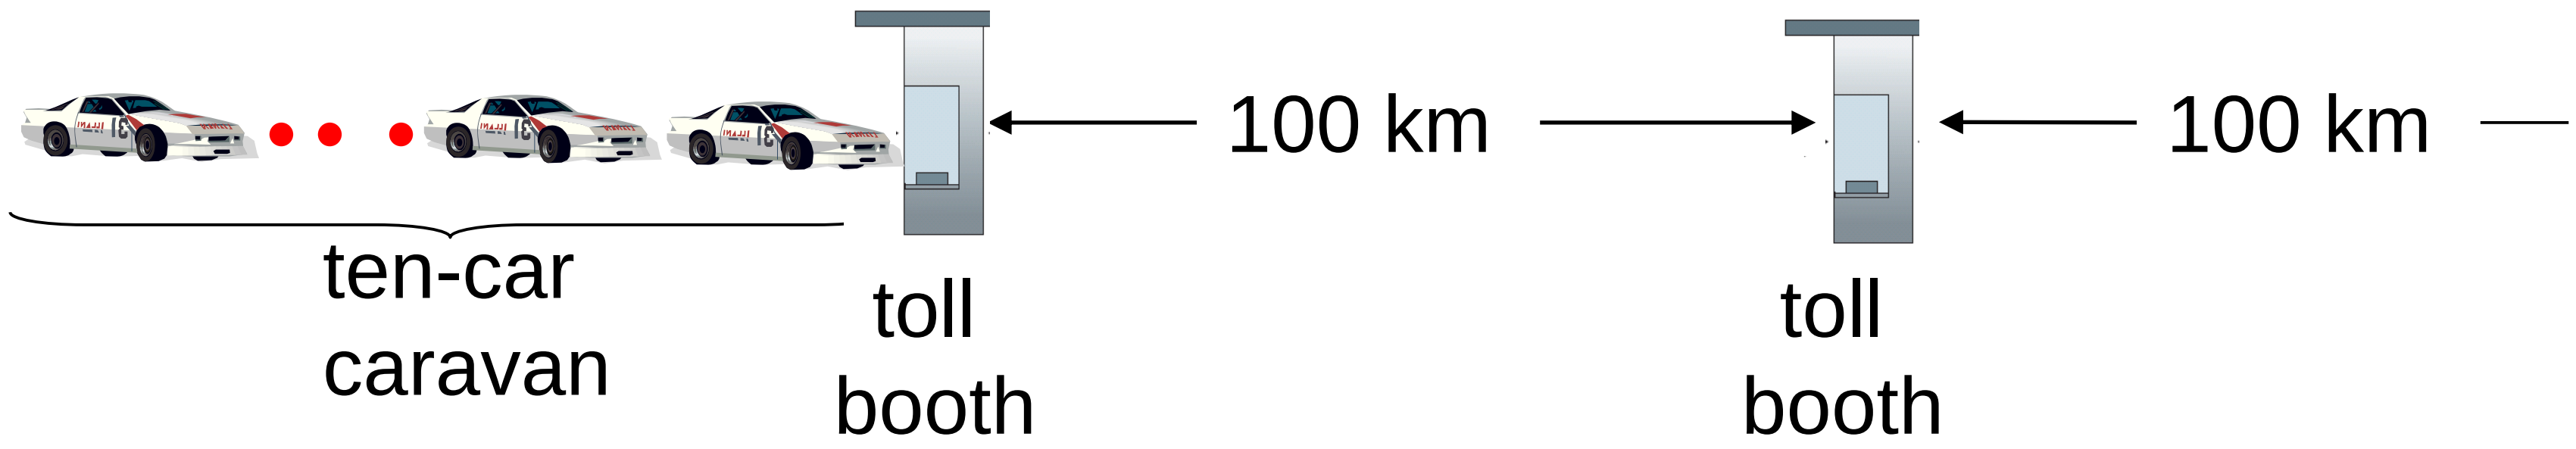

- suppose cars now "propagate" at 1000 km/hr
- and suppose toll booth now takes one min to service a car
- *Q:* Will cars arrive to 2nd booth before all cars serviced at first booth?
  - *A: Yes!* after 7 min, 1st car arrives at second booth; three cars still at 1st booth.

Queueing delay (revisited)

- *R:* link bandwidth (bps)
- *L:* packet length (bits)
- a: average packet arrival rate

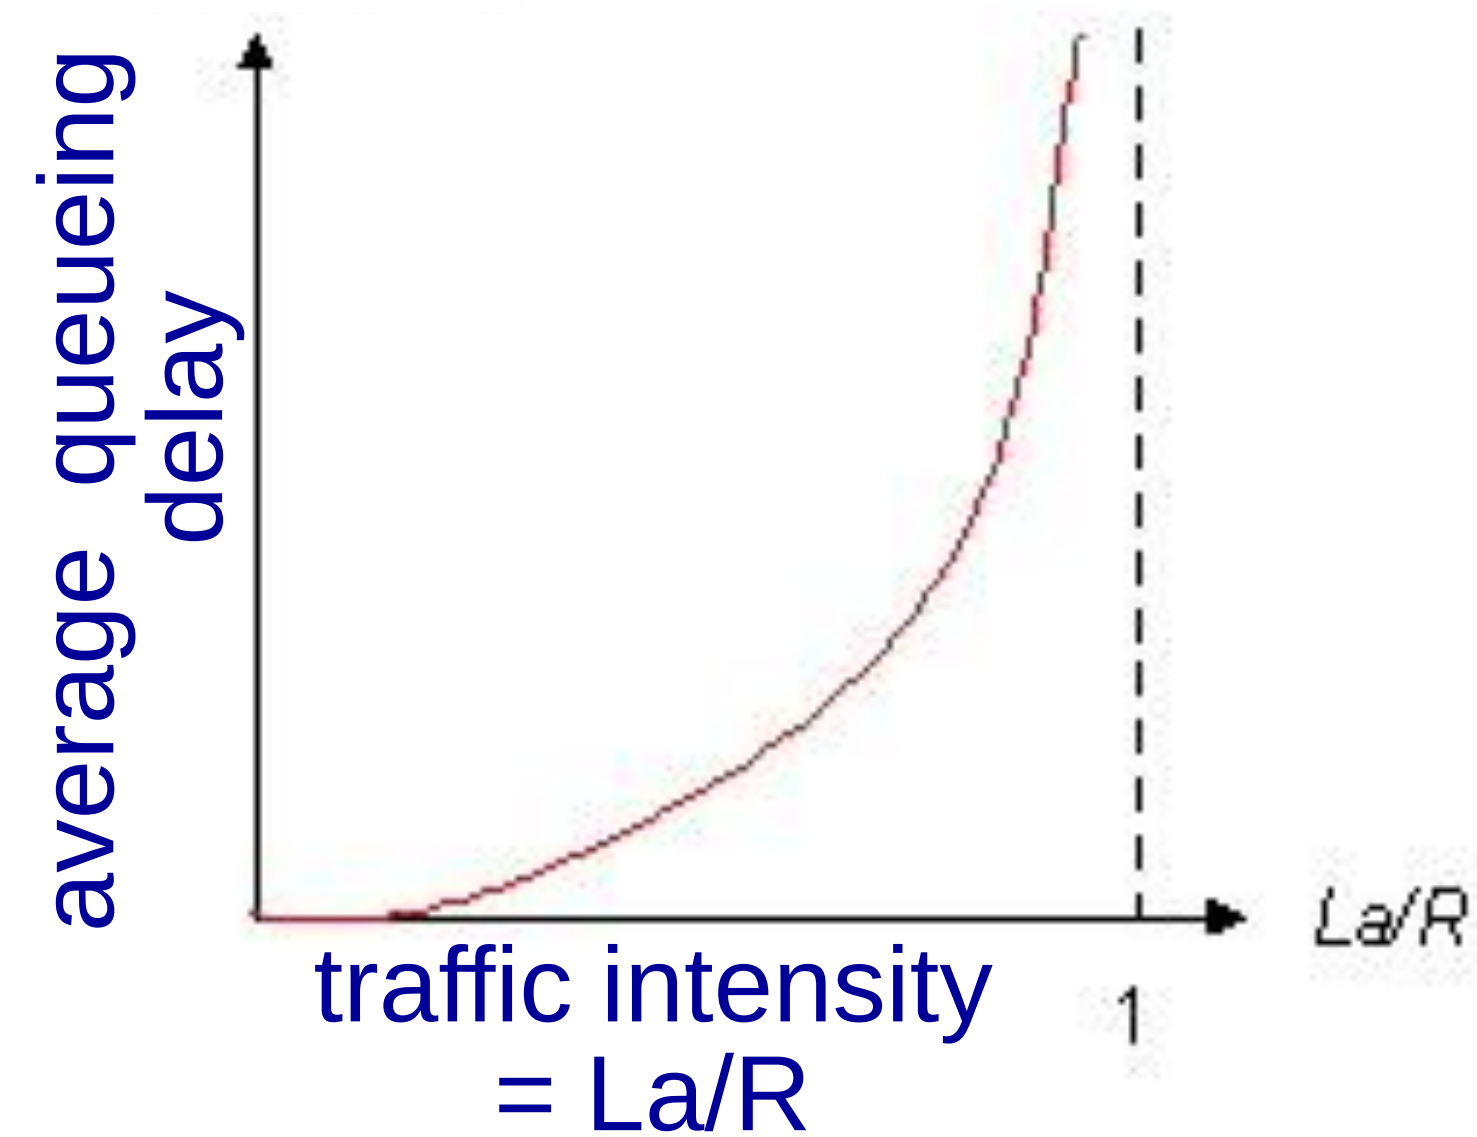

- *La/R* ~ 0: avg. queueing delay small
- *La/R* -> 1: avg. queueing delay large
- *La/R* > 1: more "work" arriving than can be serviced, average delay infinite!

La/R ~ 0

La/R -> 1

"Real" Internet delays and routes

- what do "real" Internet delay & loss look like?
- `traceroute` program: provides delay measurement from source to router along end-end Internet path towards destination. For all *i:*
  - sends three packets that will reach router *i* on path towards destination
  - router *i* will return packets to sender
  - sender times interval between transmission and reply.

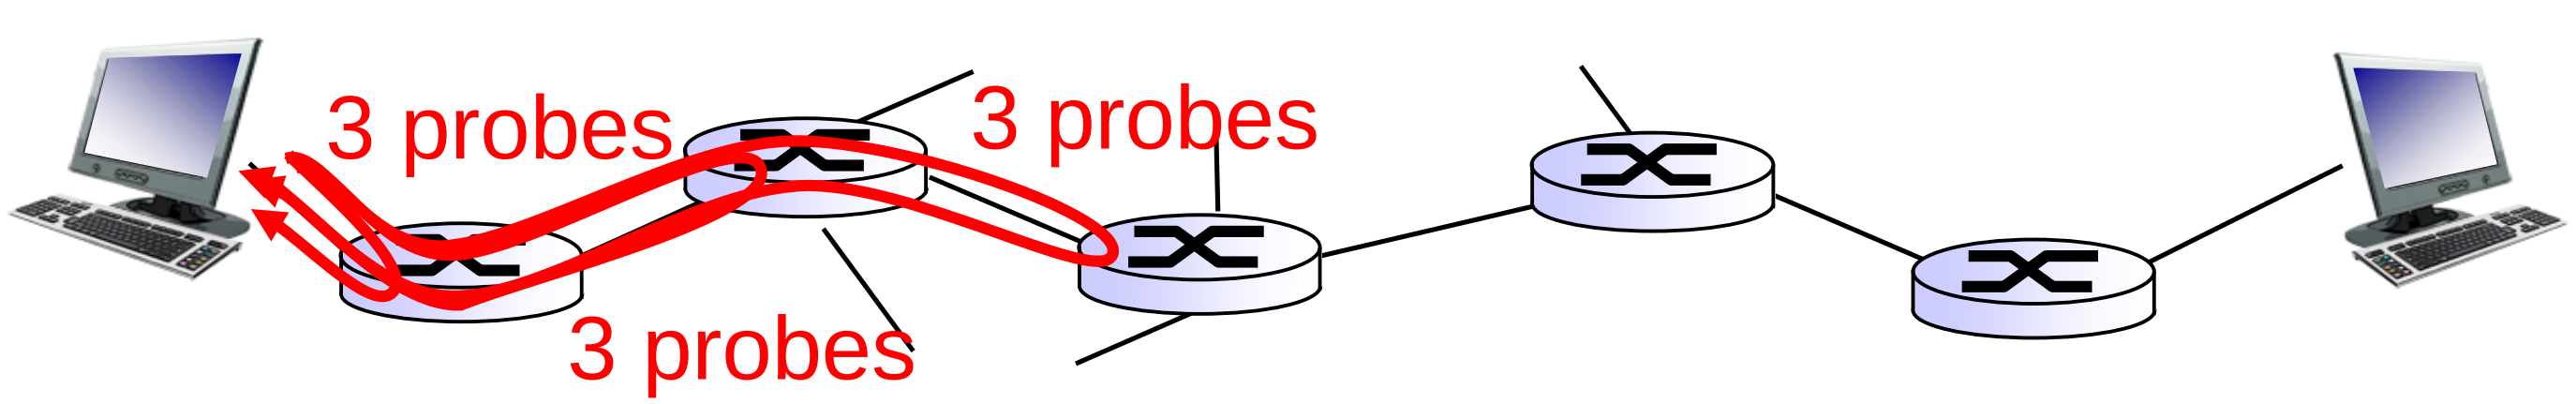

"Real" Internet delays, routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

3 delay measurements from gaia.cs.umass.edu to cs-gw.cs.umass.edu

```
1  cs-gw (128.119.240.254)  1 ms  1 ms  2 ms
2  border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145)  1 ms  1 ms  2 ms
3  cht-vbns.gw.umass.edu (128.119.3.130)  6 ms 5 ms 5 ms
4  jn1-at1-0-0-19.wor.vbns.net (204.147.132.129)  16 ms 11 ms 13 ms
5  jn1-so7-0-0-0.wae.vbns.net (204.147.136.136)  21 ms 18 ms 18 ms
6  abilene-vbns.abilene.ucaid.edu (198.32.11.9)  22 ms  18 ms  22 ms
7  nycm-wash.abilene.ucaid.edu (198.32.8.46)  22 ms  22 ms  22 ms
8  62.40.103.253 (62.40.103.253)  104 ms 109 ms 106 ms
9  de2-1.de1.de.geant.net (62.40.96.129)  109 ms 102 ms 104 ms
10  de.fr1.fr.geant.net (62.40.96.50)  113 ms 121 ms 114 ms
11  renater-gw.fr1.fr.geant.net (62.40.103.54)  112 ms  114 ms  112 ms
12  nio-n2.cssi.renater.fr (193.51.206.13)  111 ms  114 ms  116 ms
13  nice.cssi.renater.fr (195.220.98.102)  123 ms  125 ms  124 ms
14  r3t2-nice.cssi.renater.fr (195.220.98.110)  126 ms  126 ms  124 ms
15  eurecom-valbonne.r3t2.ft.net (193.48.50.54)  135 ms  128 ms  133 ms
16  194.214.211.25 (194.214.211.25)  126 ms  128 ms  126 ms
17  * * *
18  * * *
19  fantasia.eurecom.fr (193.55.113.142)  132 ms  128 ms  136 ms
```

trans-oceanic link

* means no response (probe lost, router not replying)

* Do some traceroutes from exotic countries at www.traceroute.org

Packet loss

- queue (aka buffer) preceding link in buffer has finite capacity
- packet arriving to full queue dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not at all

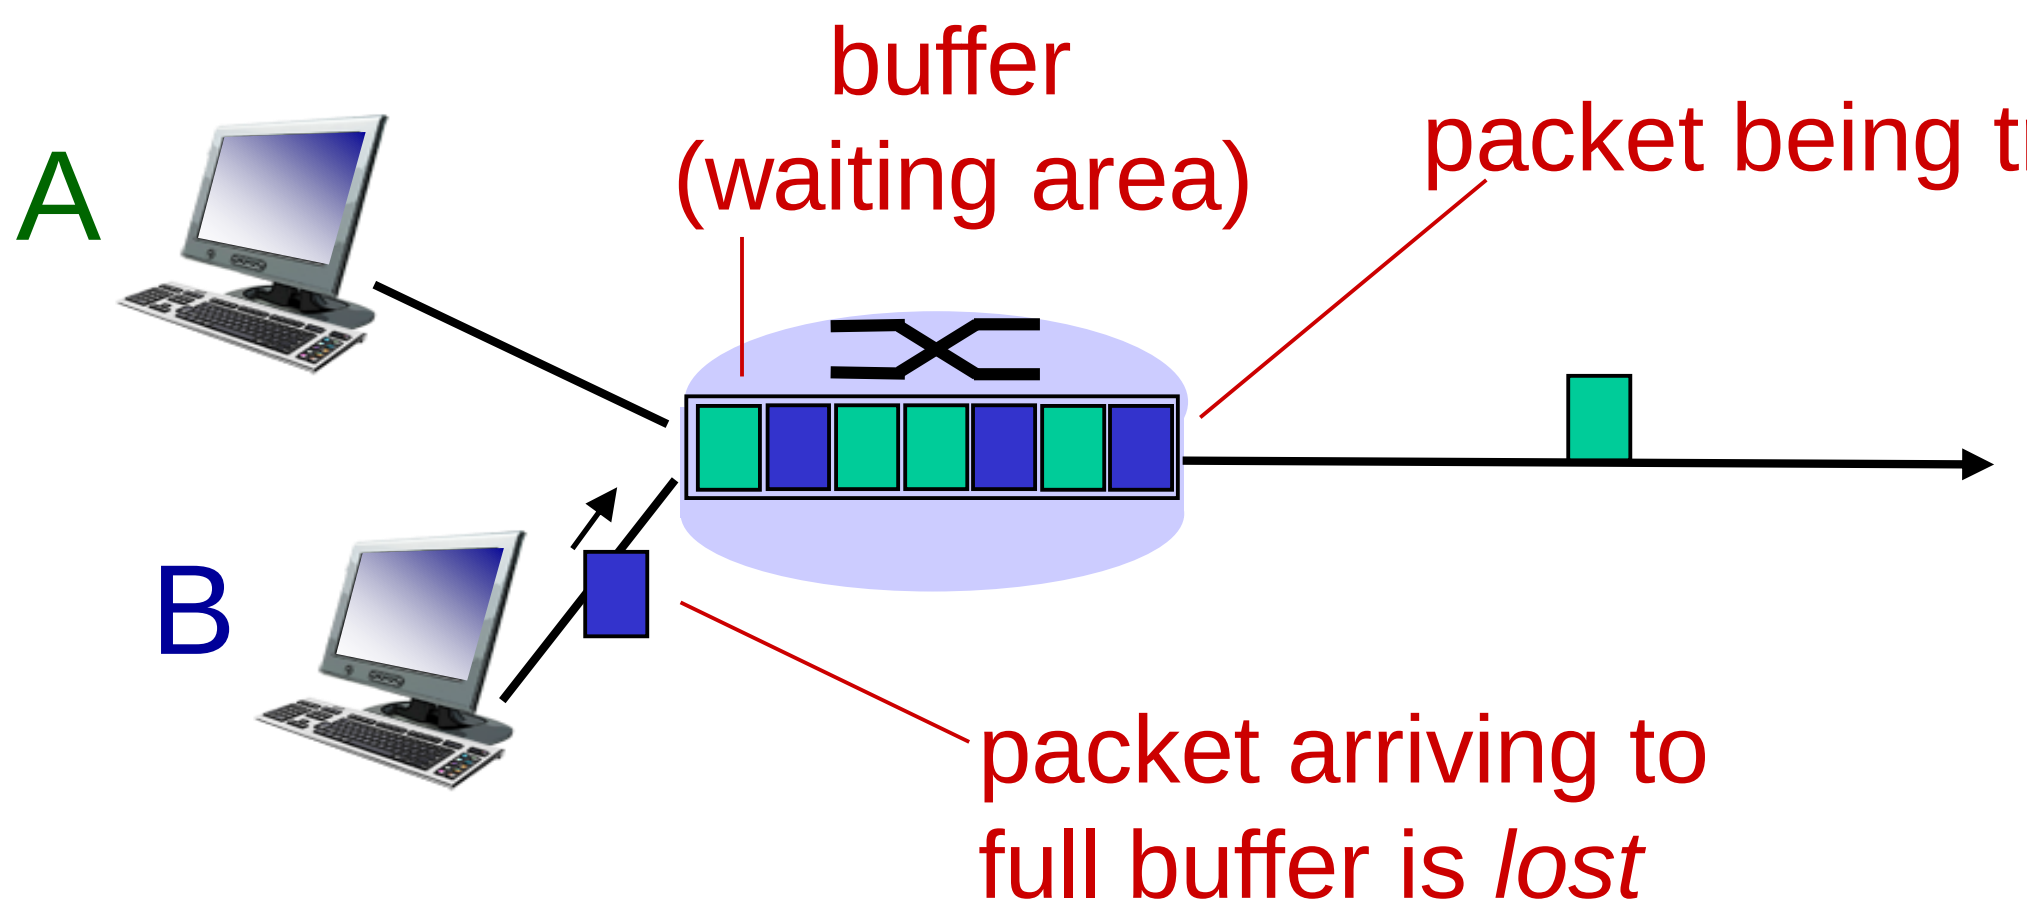

Throughput

- *throughput:* rate (bits/time unit) at which bits transferred between sender/receiver
  - *instantaneous:* rate at given point in time
  - *average:* rate over longer period of time

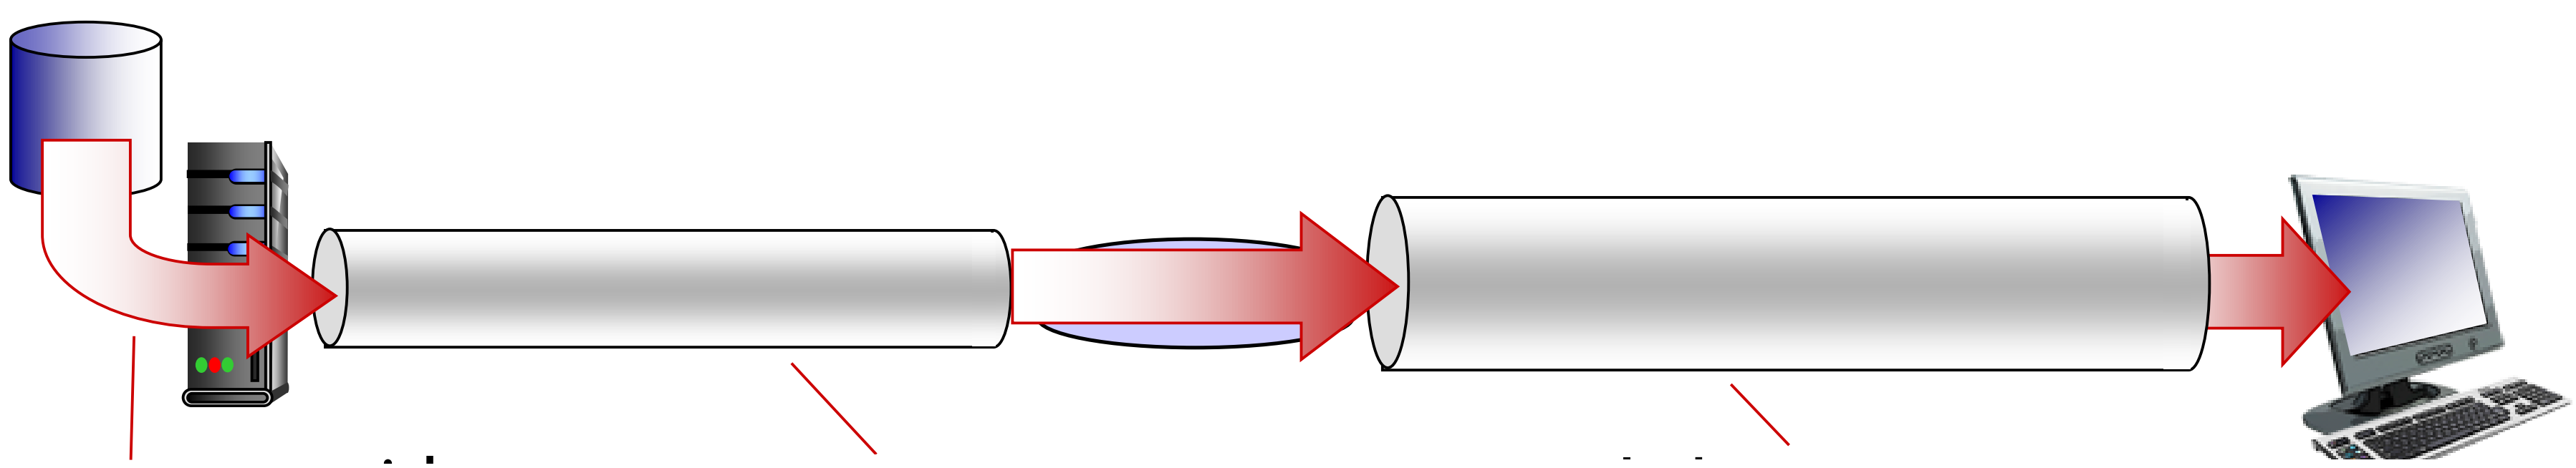

Throughput (more)

- $R_s < R_c$ What is average end-end throughput?

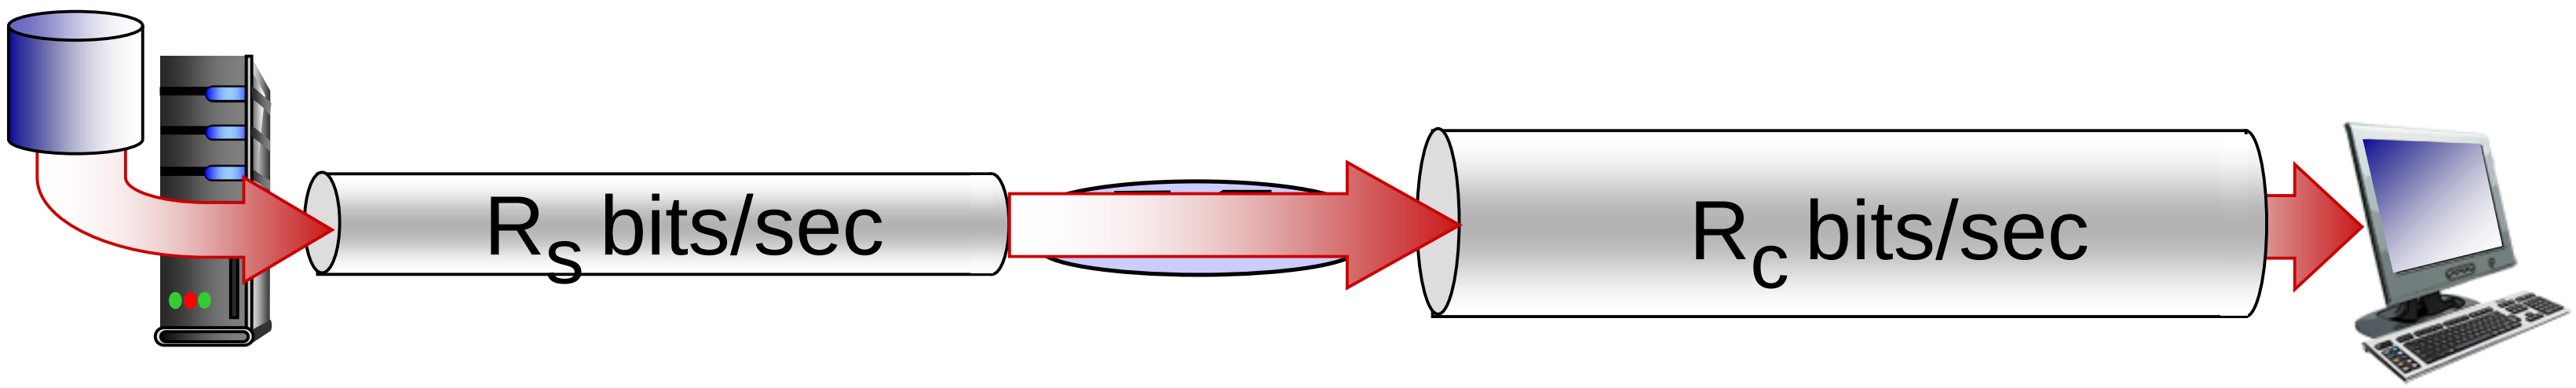

- $R_s > R_c$ What is average end-end throughput?

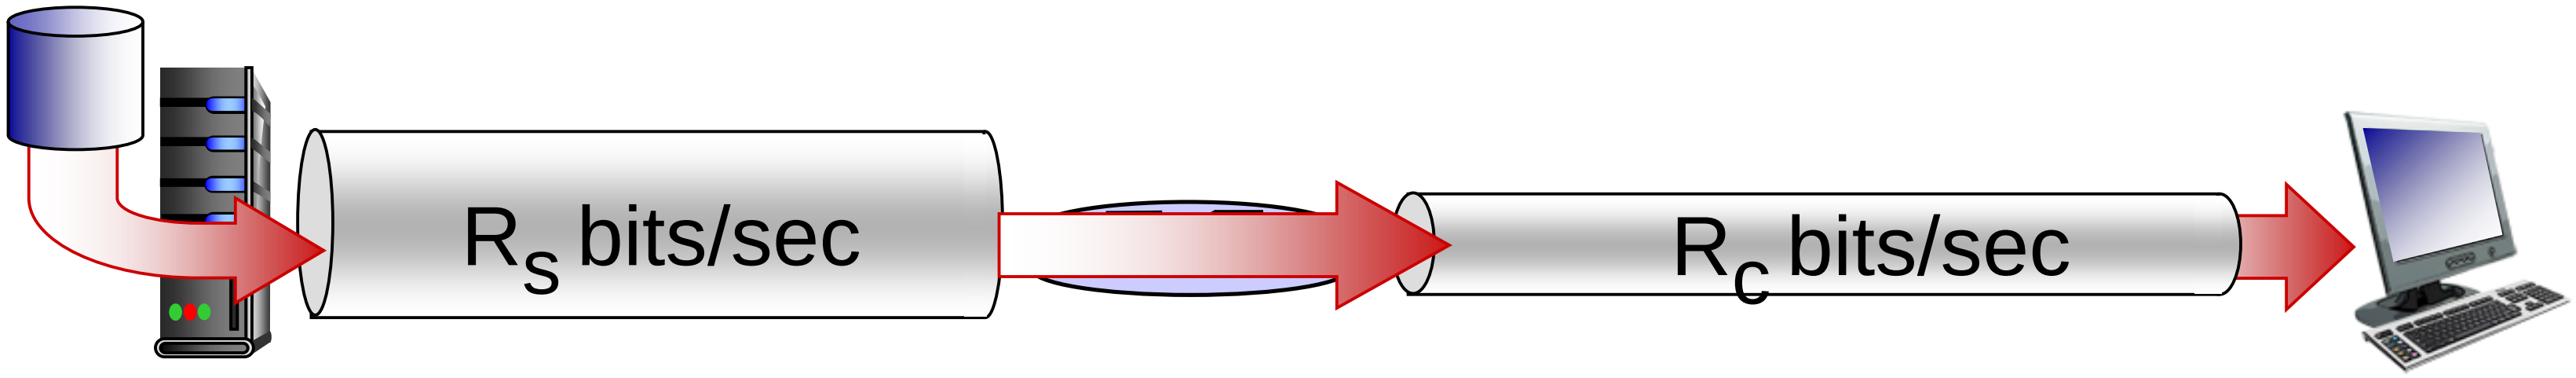

bottleneck link

link on end-end path that constrains end-end throughput

Throughput: Internet scenario

- per-connection end-end throughput: $\min(R_c, R_s, R/10)$
- in practice: R_c or R_s is often bottleneck

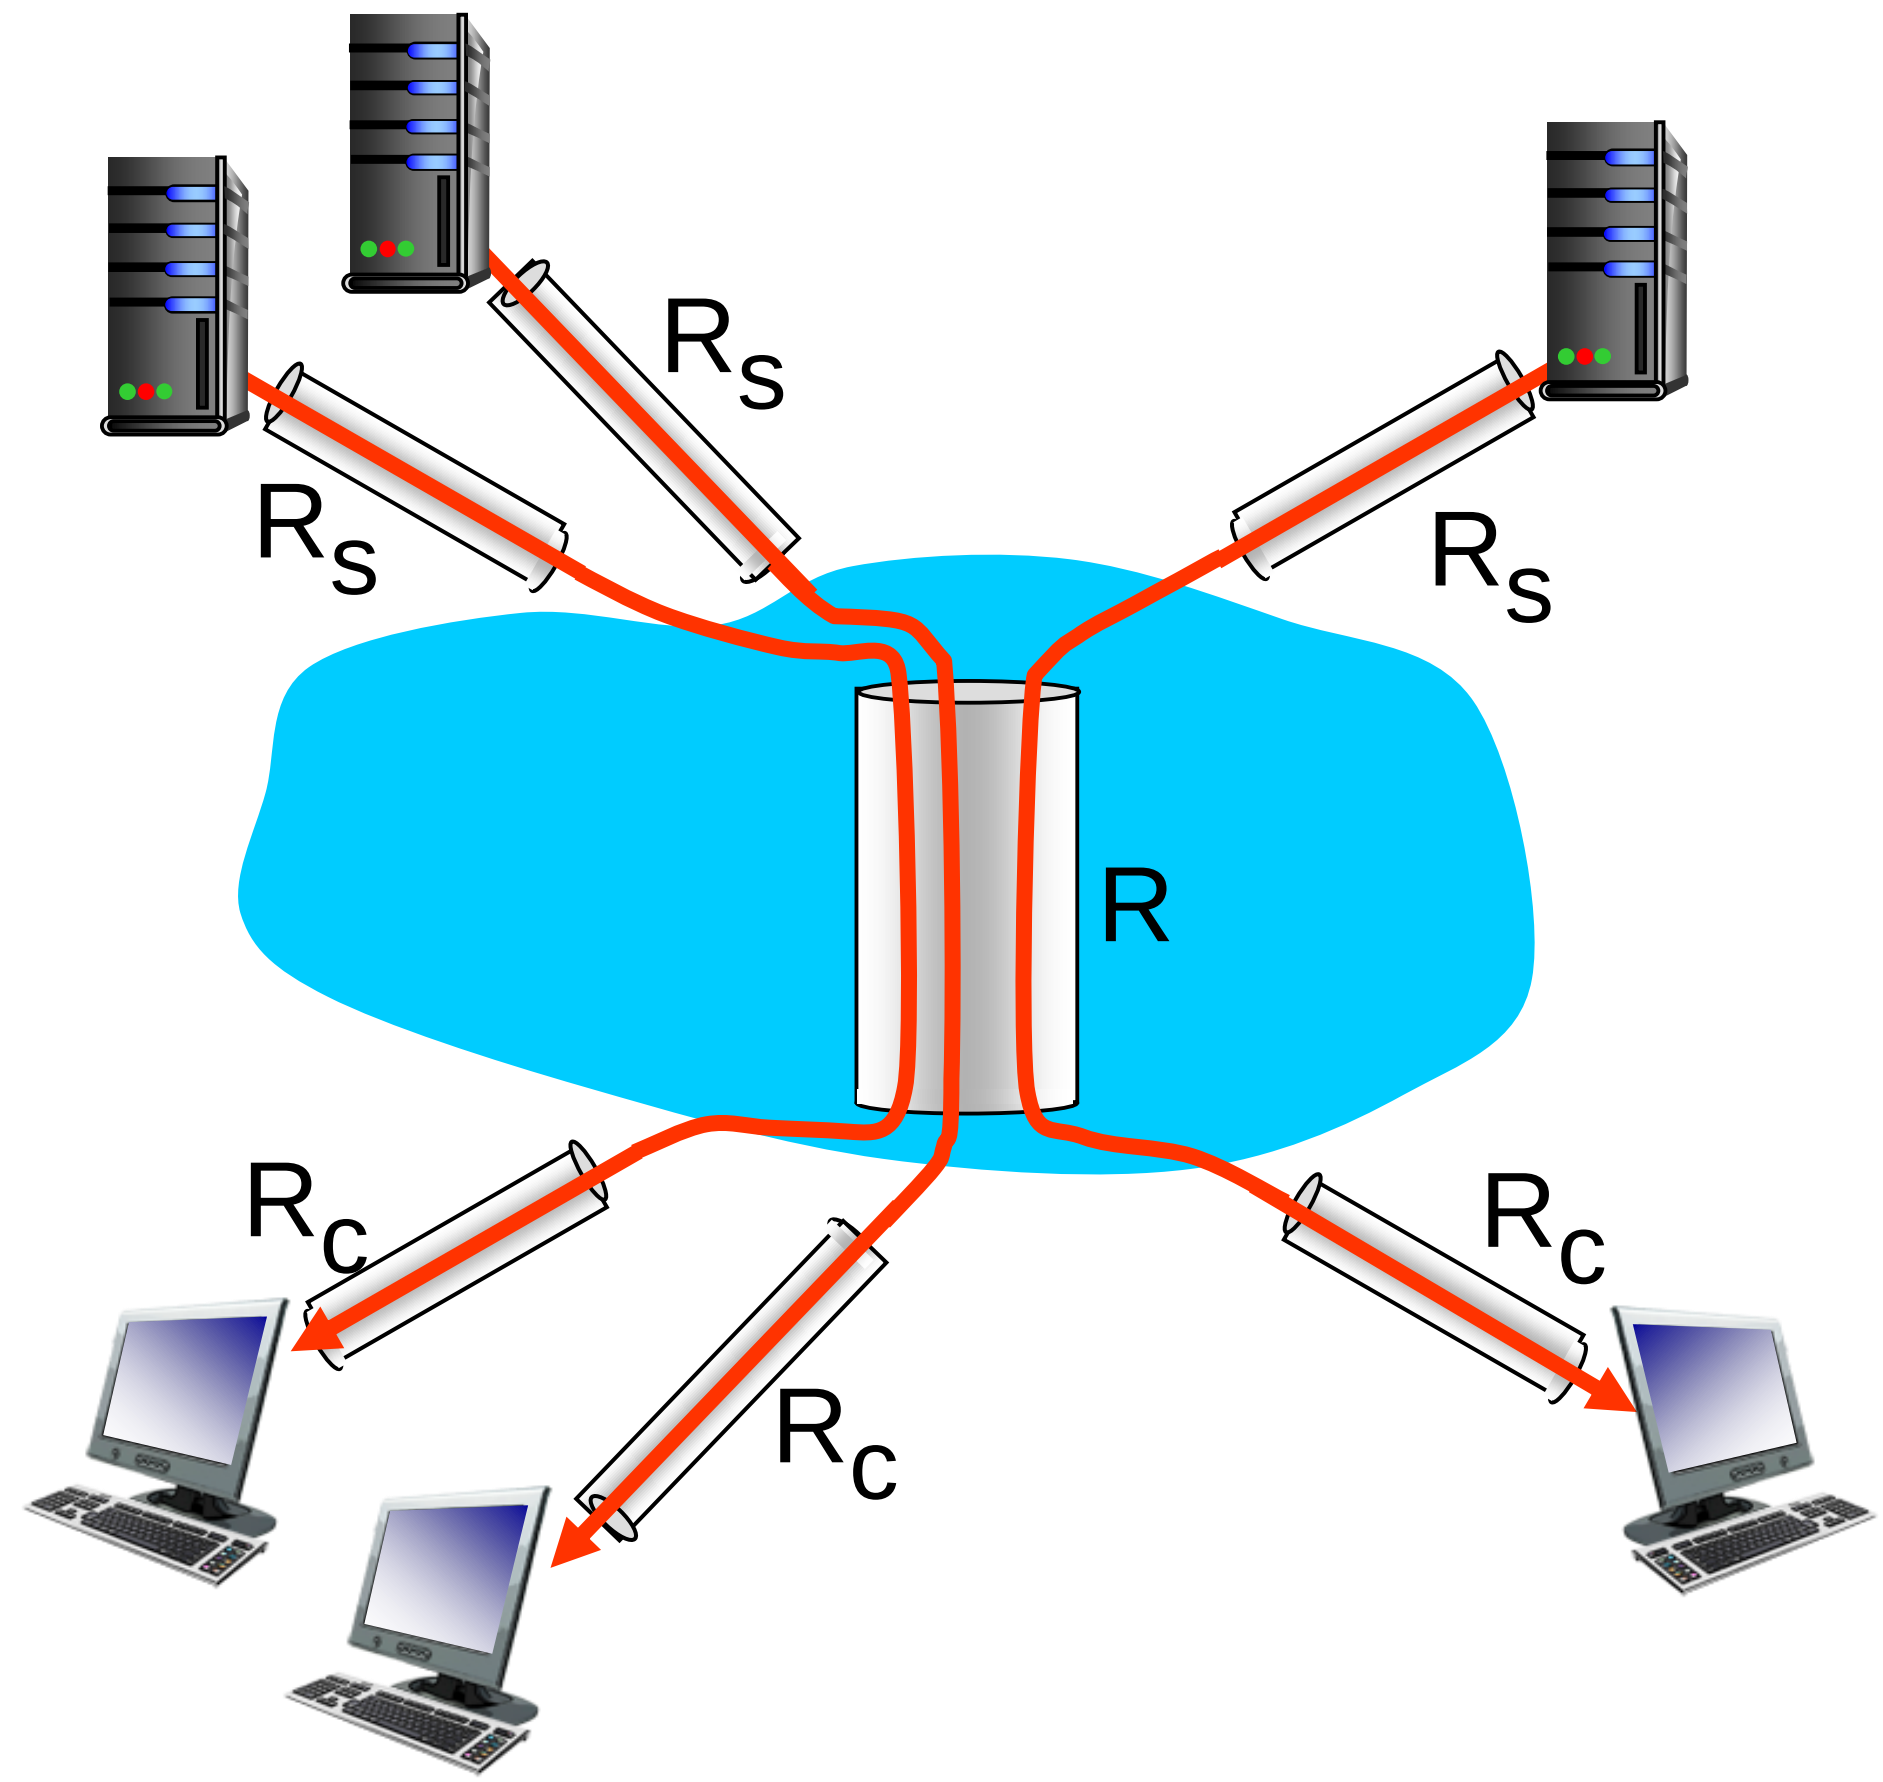

10 connections (fairly) share backbone bottleneck link R bits/sec

Chapter 1: roadmap

1.1 what *is* the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

Protocol "layers"

Networks are complex, with many "pieces":

- hosts
- routers
- links of various media
- applications
- protocols
- hardware, software

Question:

is there any hope of *organizing* structure of network?

…. or at least our discussion of networks?

Organization of air travel

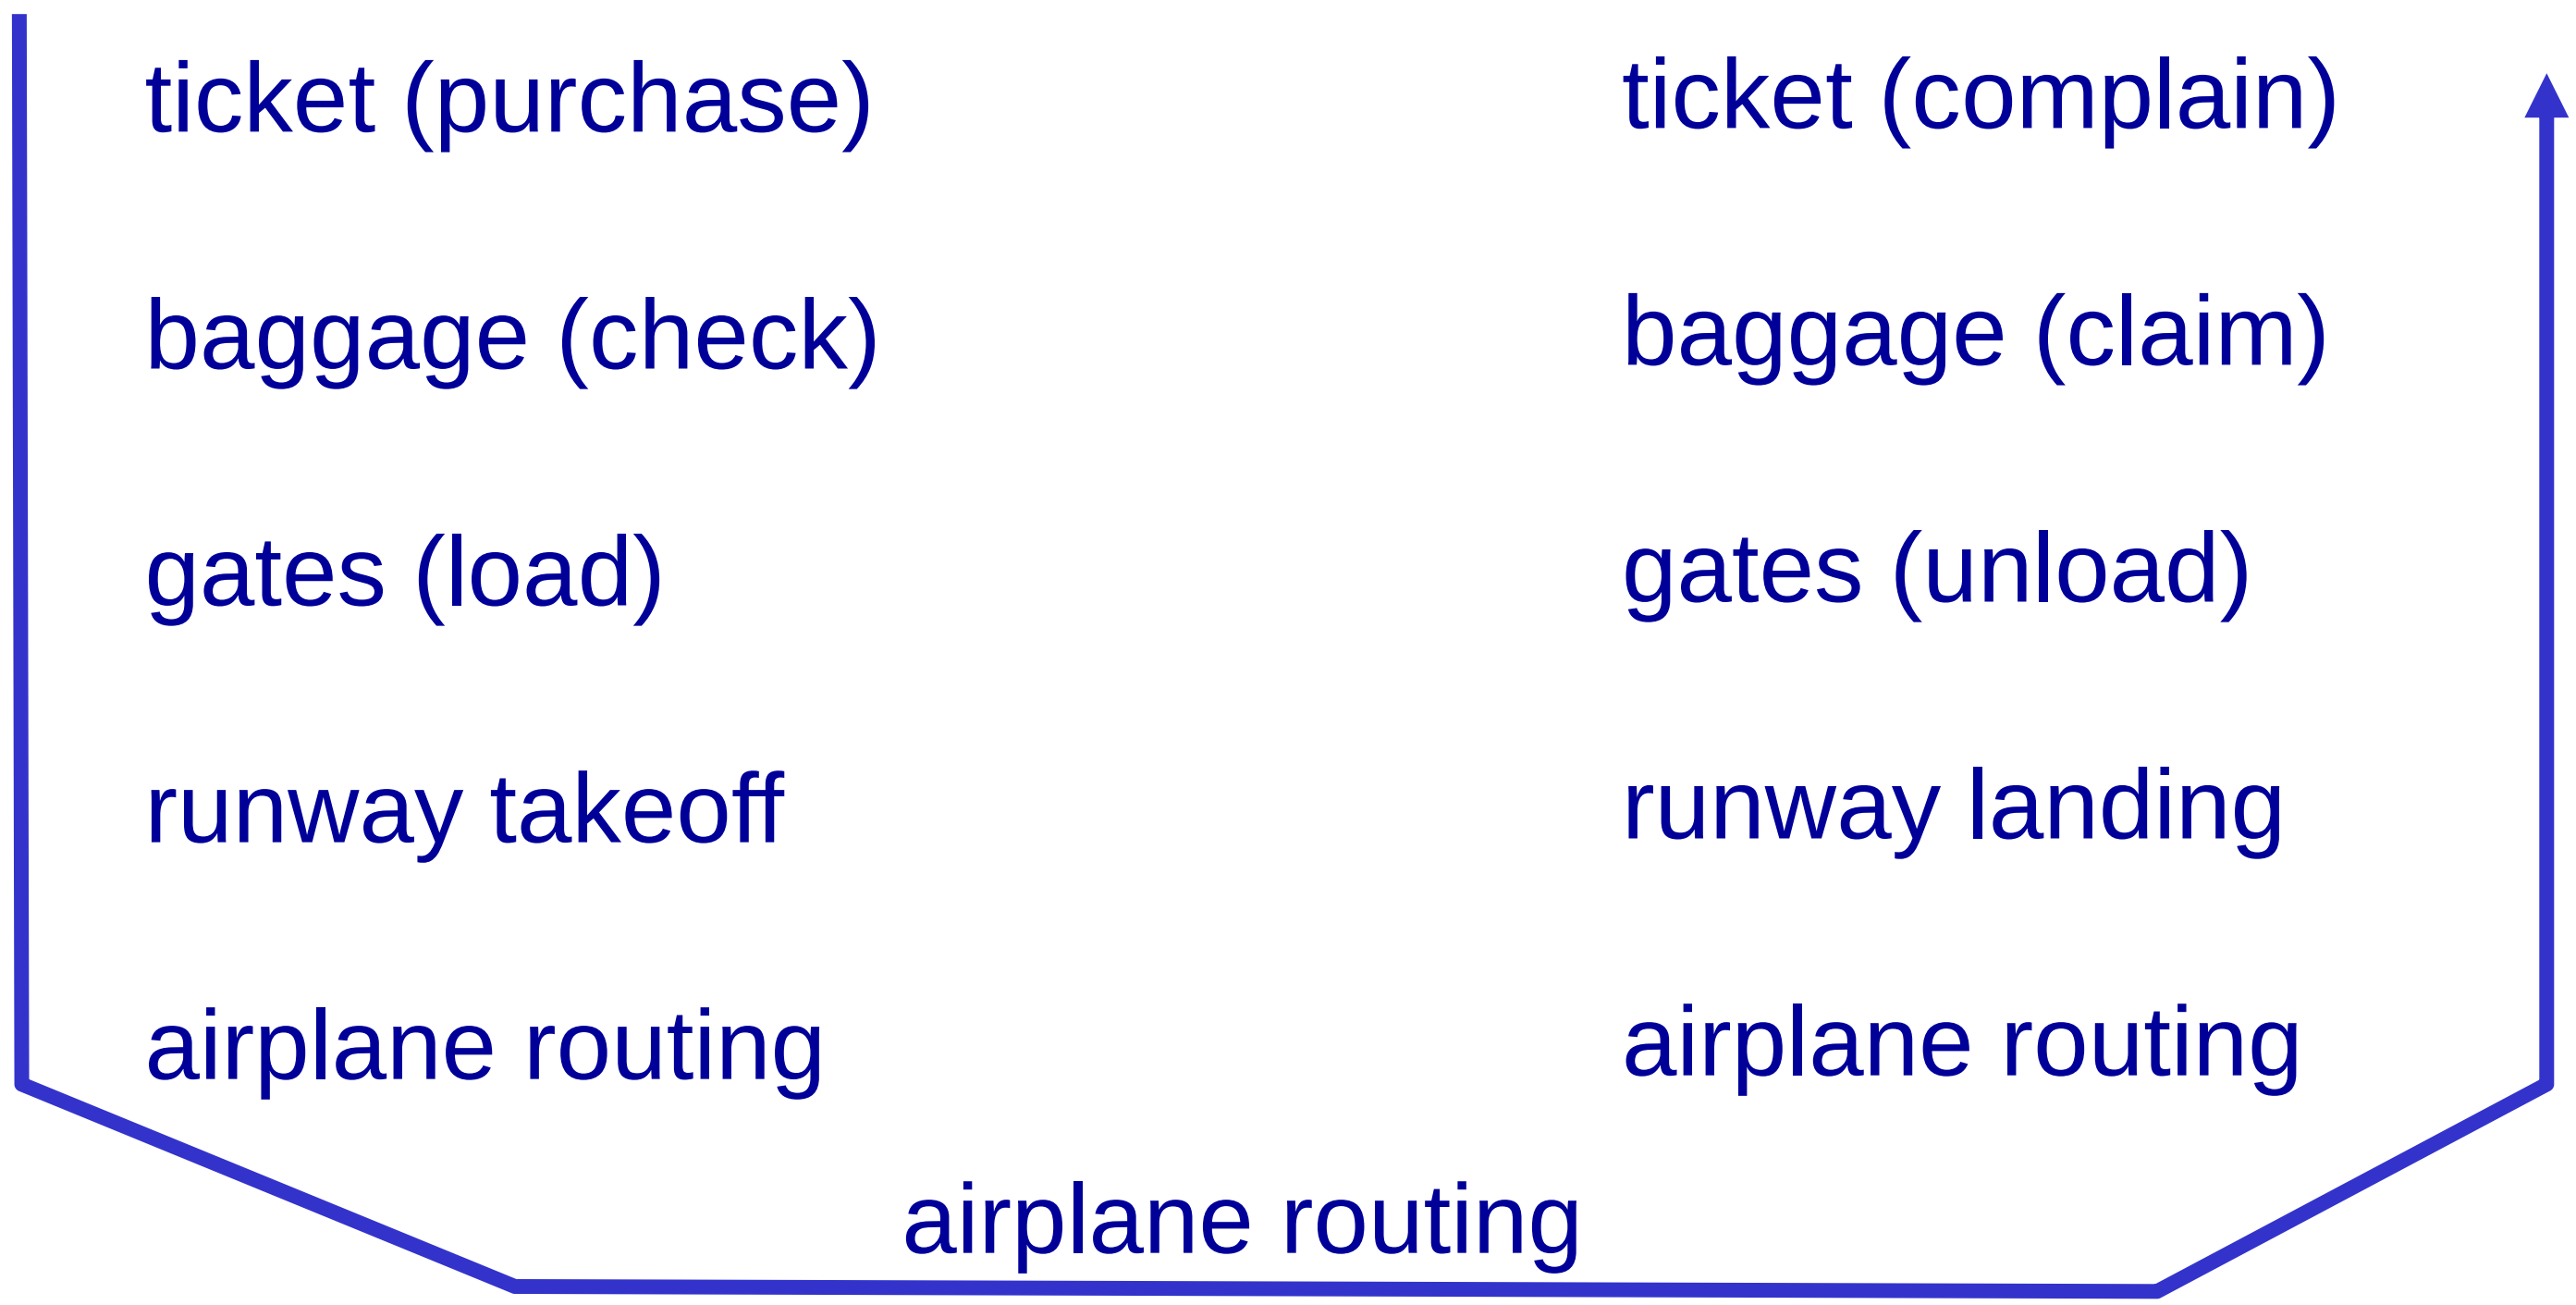

- a series of steps

Layering of airline functionality

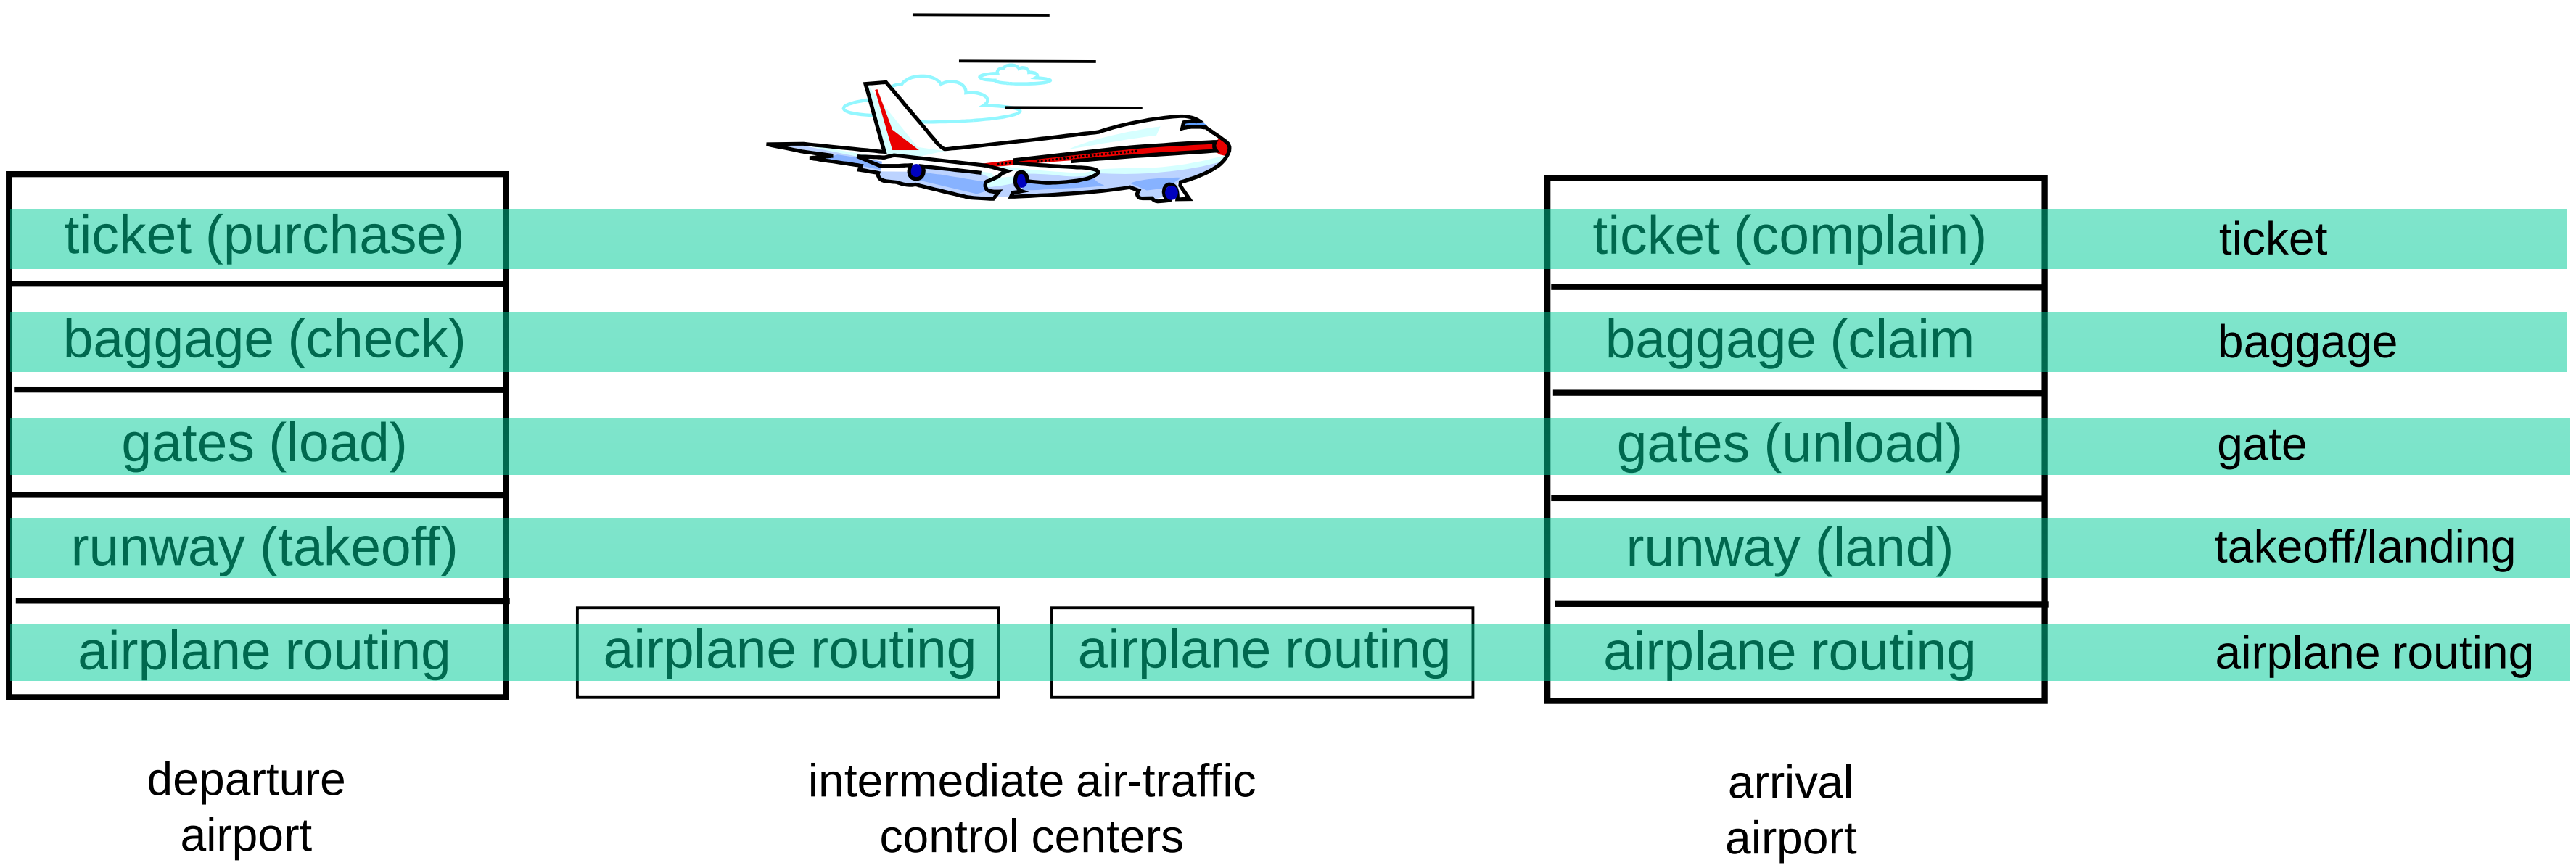

layers: each layer implements a service

- via its own internal-layer actions
- relying on services provided by layer below

Why layering?

dealing with complex systems:

- explicit structure allows identification, relationship of complex system's pieces
  - layered *reference model* for discussion
- modularization eases maintenance, updating of system
  - change of implementation of layer's service transparent to rest of system
  - e.g., change in gate procedure doesn't affect rest of system
- layering considered harmful?

Internet protocol stack

- *application:* supporting network applications
  - FTP, SMTP, HTTP
- *transport:* process-process data transfer
  - TCP, UDP
- *network:* routing of datagrams from source to destination
  - IP, routing protocols
- *link:* data transfer between neighboring network elements
  - Ethernet, 802.11 (WiFi), PPP
- *physical:* bits "on the wire"

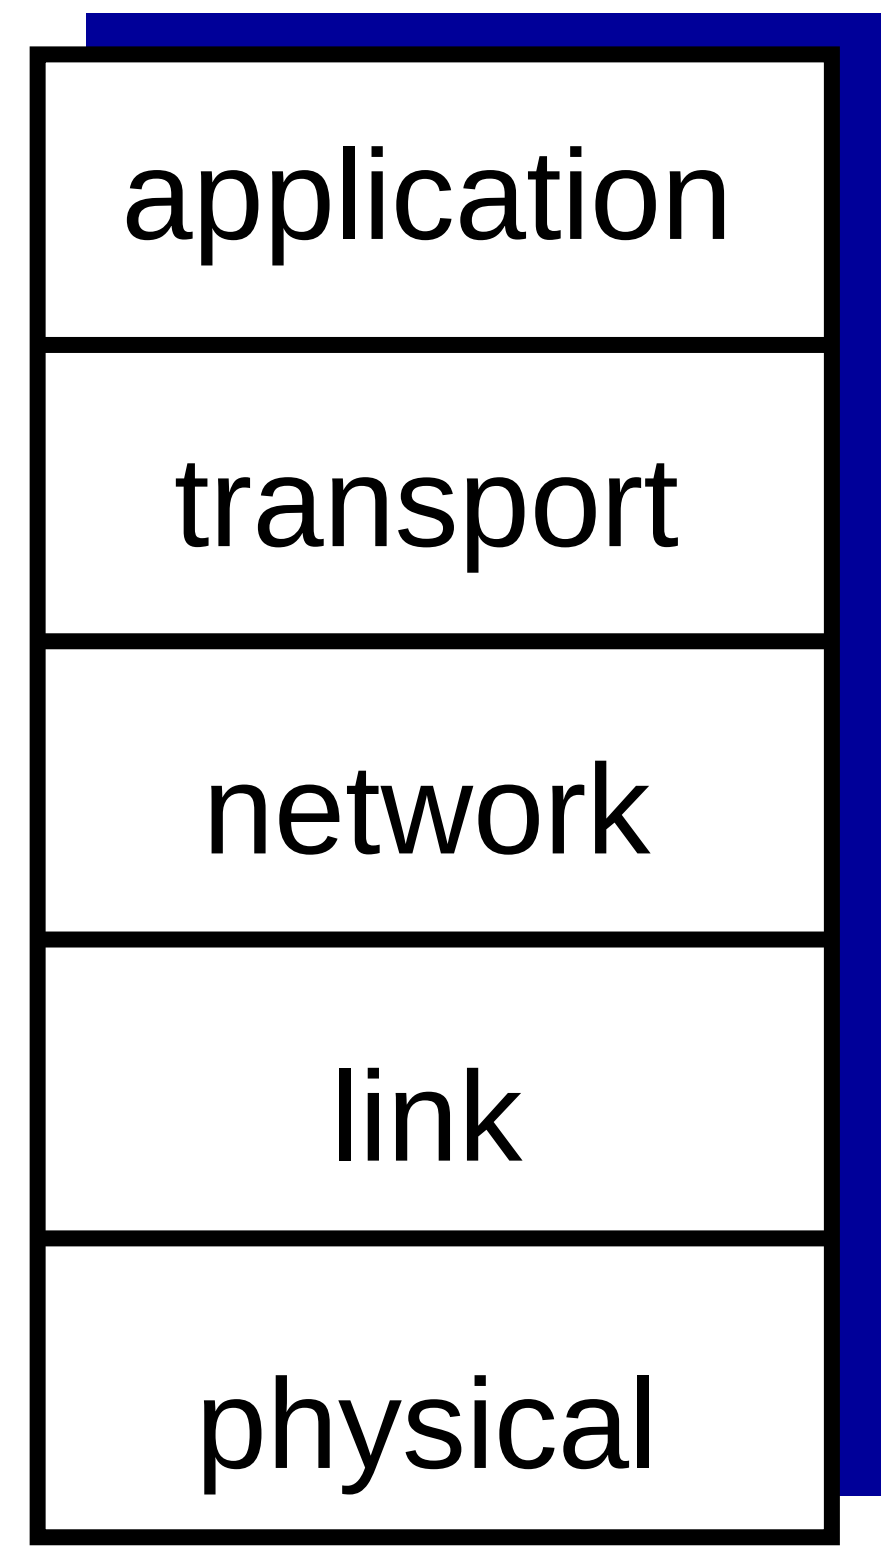

ISO/OSI reference model

- *presentation:* allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- *session:* synchronization, checkpointing, recovery of data exchange
- Internet stack "missing" these layers!
  - these services, *if needed*, must be implemented in application
  - needed?

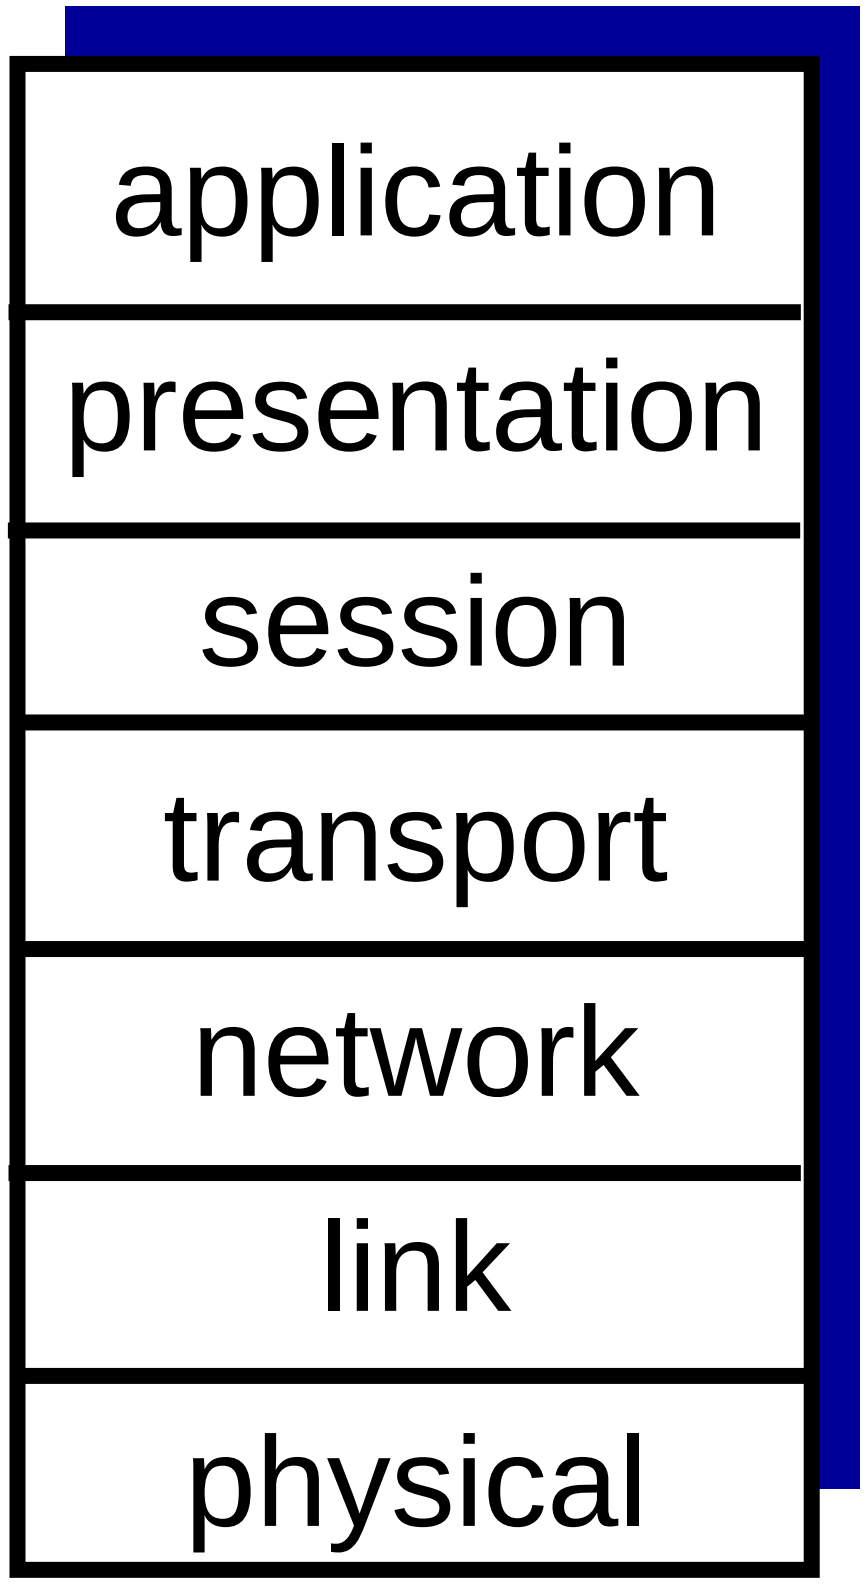

Encapsulation

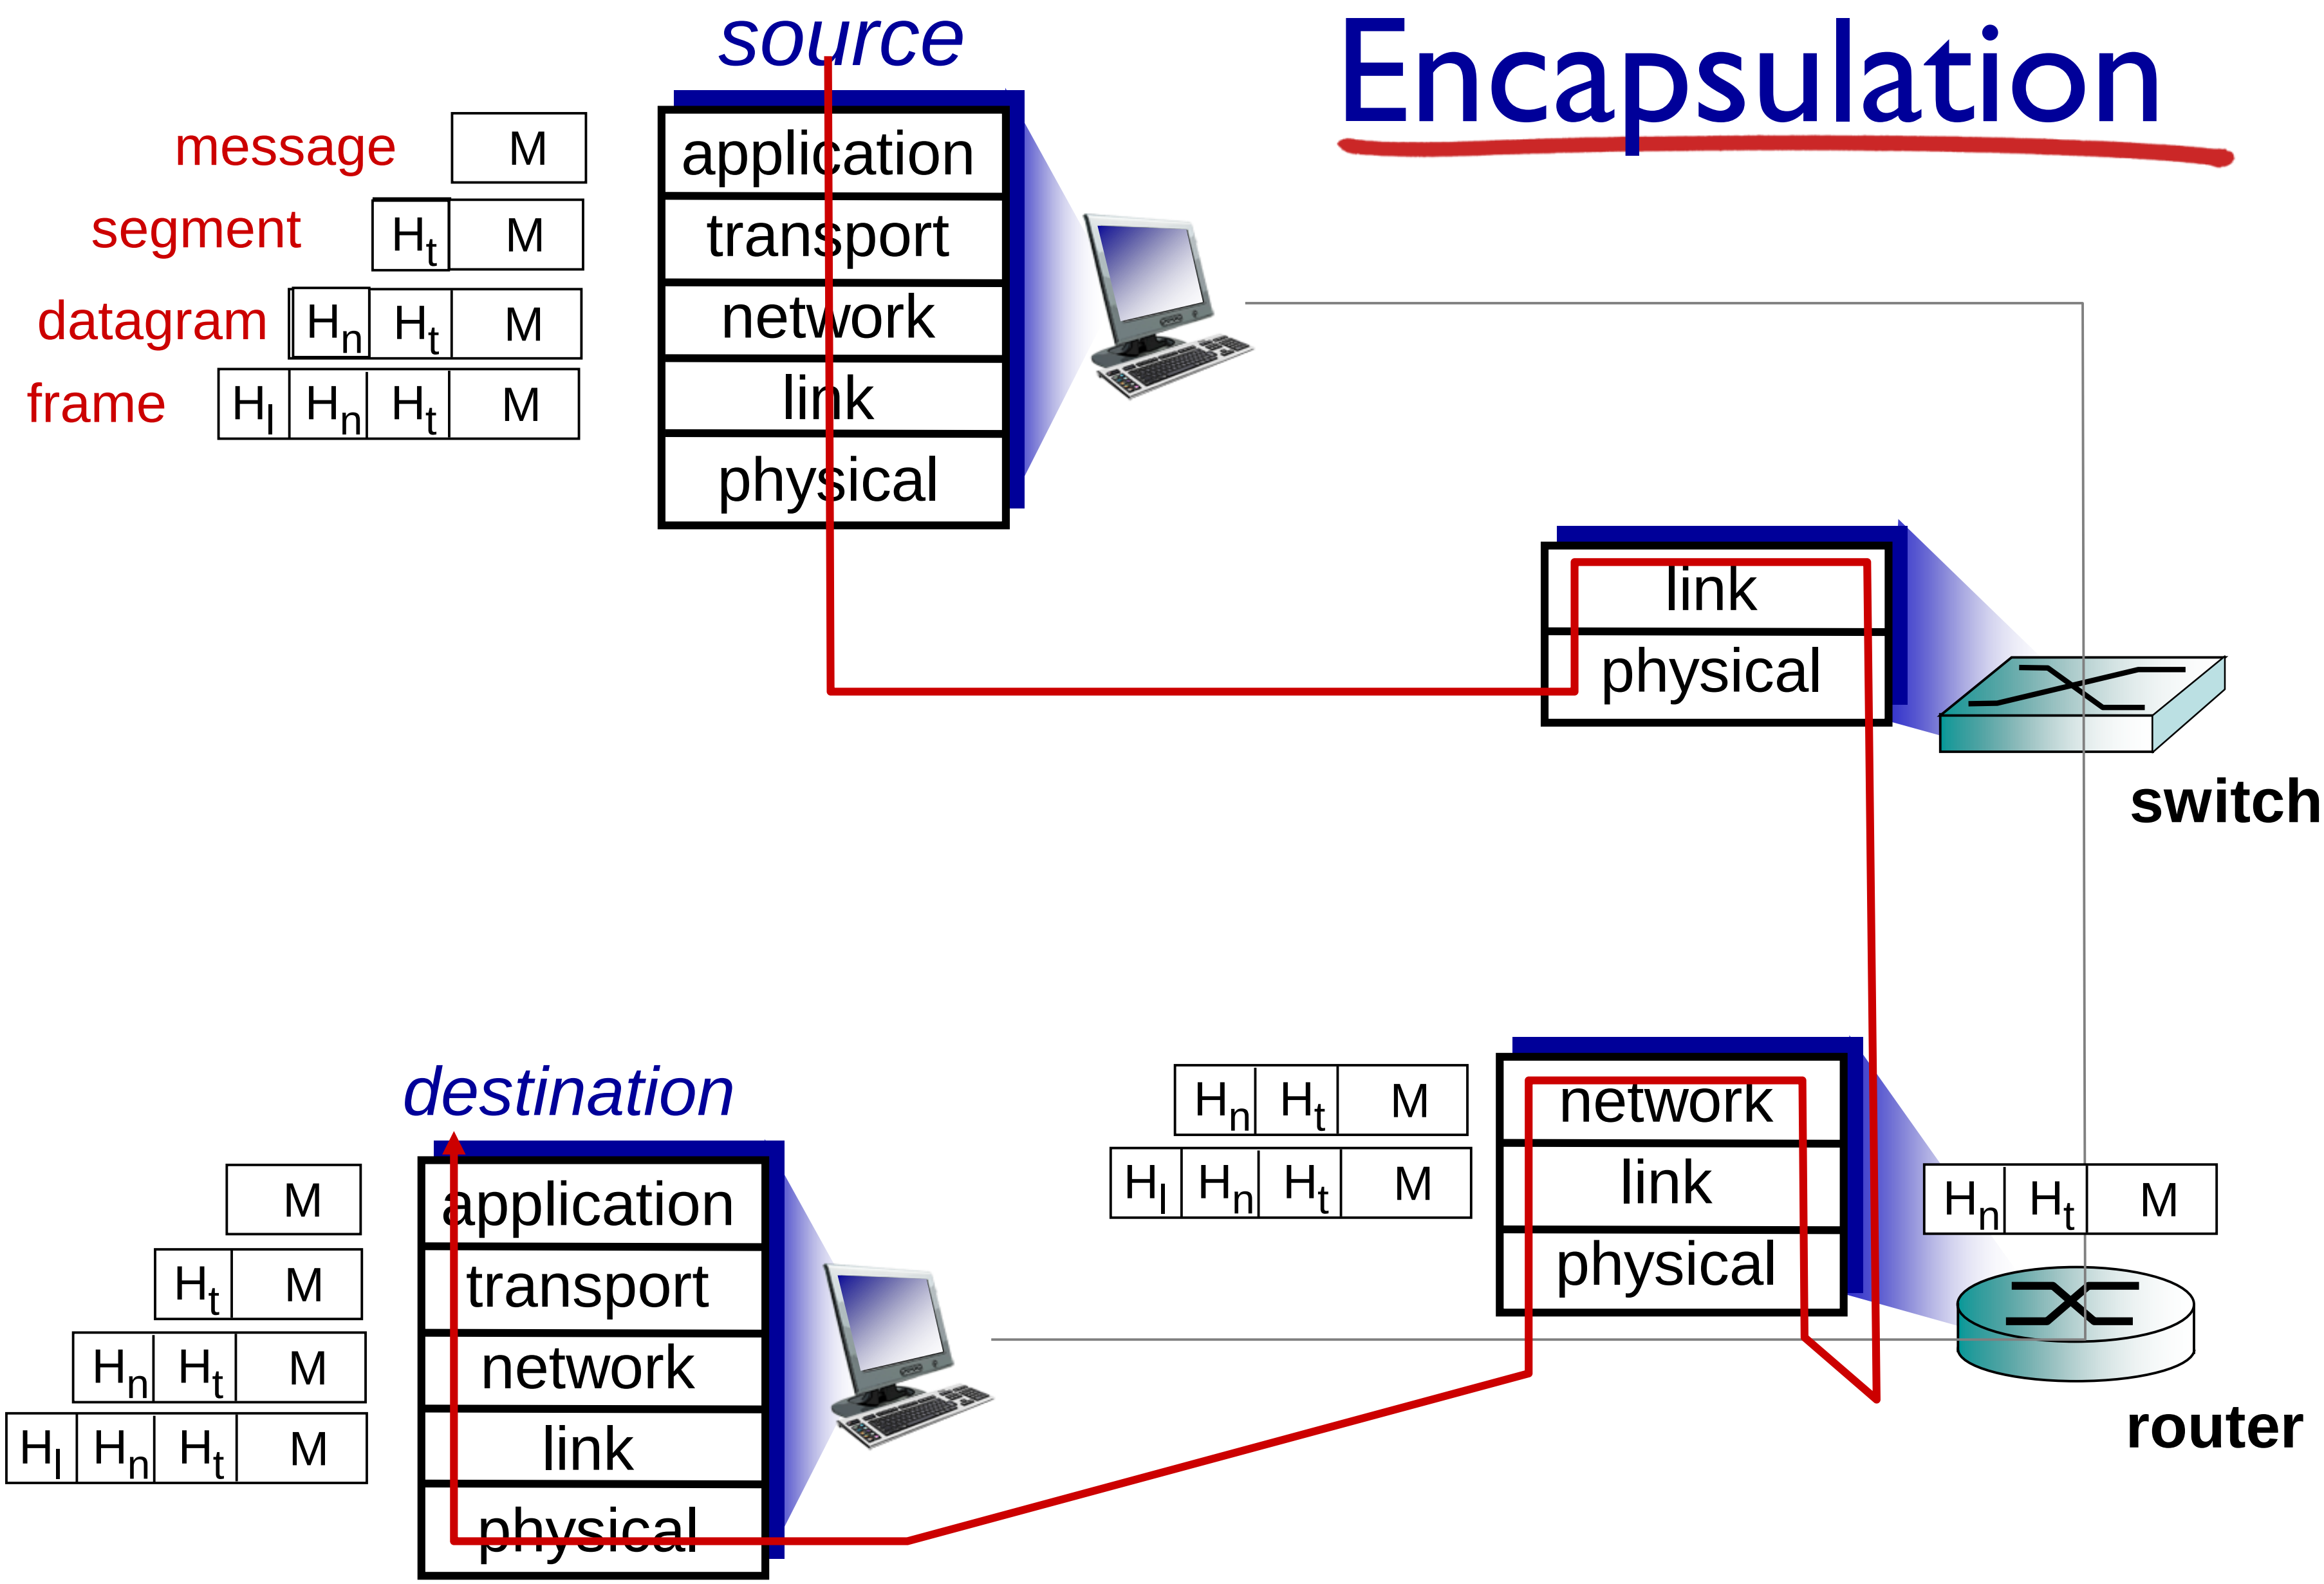

Introduction: summary

covered a "ton" of material!

- Internet overview
- what's a protocol?
- network edge, core, access network
  - packet-switching versus circuit-switching
  - Internet structure
- performance: loss, delay, throughput
- layering, service models

you now have:

- context, overview, "feel" of networking
- more depth, detail *to follow!*