


Narrow European Electronic Handle Lock

EXLH-EP20

The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

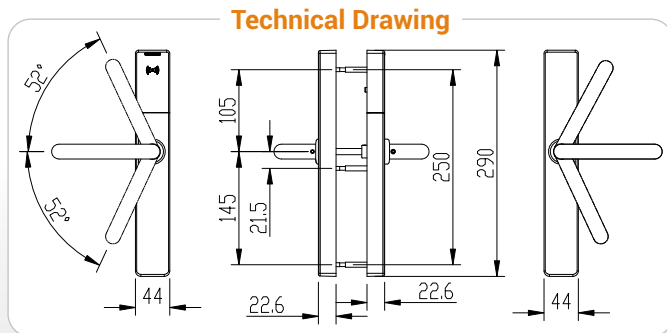

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card and mobile Bluetooth door opening.
- Default hidden mechanical key override design(electronic key override as option).
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



Datalink
Virtual

Mobile
Virtual

Wireless
Online

* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 290mm × 44mm × 22.6mm
- Spindle Available: Standard mortise lock 8 mm (7.0mm, 7.6mm, 8.5mm, 9mm option)
- Handle Condition: Free wheeling under lock condition, maximum Angle 52° upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AAA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour




Finishes



Certifications



The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

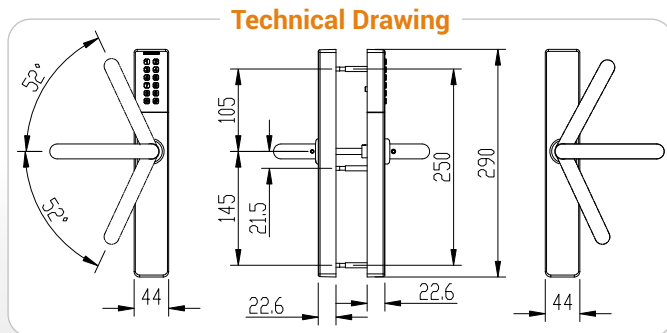

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card, pincode and mobile Bluetooth door opening.
- Default hidden mechanical key override design(electronic key override as option).
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt (optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 290mm × 44mm × 22.6mm
- Spindle Available: Standard mortise lock 8 mm (7.0mm, 7.6mm, 8.5mm, 9mm option)
- Handle Condition: Free wheeling under lock condition, maximum Angle 52° upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AAA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour



Finishes




Certifications



Wide European Electronic Handle Lock

EXLH-EP30

The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

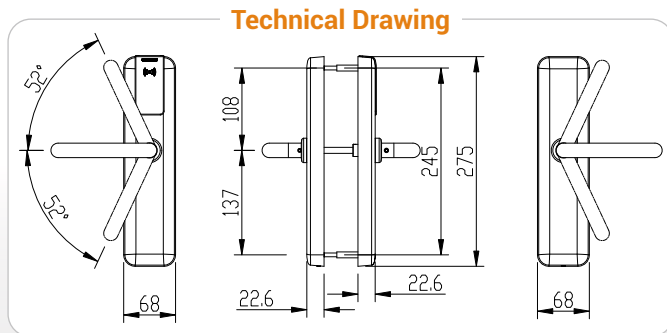

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card and mobile Bluetooth door opening.
- Default hidden mechanical key override design(electronic key override as option).
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



Datalink
Virtual

Mobile
Virtual

Wireless
Online

* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 275mm × 68mm × 22.6mm
- Spindle Available: Standard mortise lock 8 mm (7.0mm, 7.6mm, 9mm option)
- Handle Condition: Free wheeling under lock condition, maximum Angle 52° upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour




Finishes



Certifications



The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

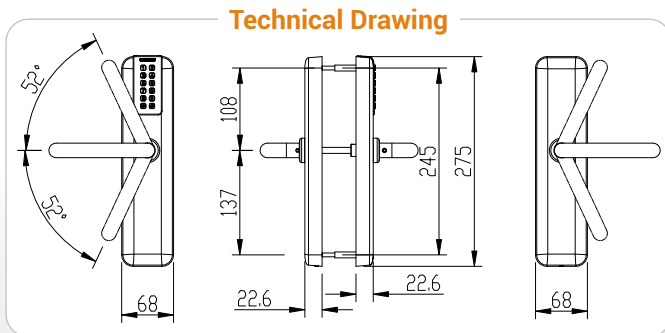

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card, pincode and mobile Bluetooth door opening.
- Default hidden mechanical key override design(electronic key override as option).
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



Datalink Virtual Mobile Virtual Wireless Online

* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 275mm × 68mm × 22.6mm
- Spindle Available: Standard mortise lock 8 mm (7.0mm, 7.6mm, 9mm option)
- Handle Condition: Free wheeling under lock condition, maximum Angle 52° upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour



Finishes



Certifications




Inner Clutch European Electronic Handle Lock

EXLH-EP10

The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

Technical Drawing

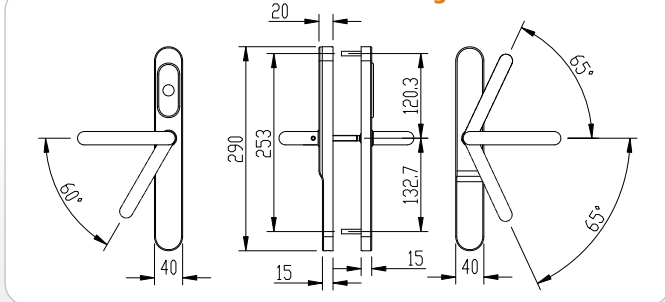

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card and mobile Bluetooth door opening.
- Default hidden mechanical key override design(electronic key override as option).
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



Datalink Virtual Mobile Virtual Wireless Online

* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 290mm × 40mm × (Outer 15 / Inner 20) mm
- Spindle Available: Standard mortise lock 8 mm (7.0mm, 7.6mm, 8.5mm, 9mm option)
- Handle Condition: Free wheeling under lock condition, maximum Angle 65°upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AAA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour



Finishes



Certifications




Inner Clutch European Electronic Handle Lock (Password)

EXLH-EP11

The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

Technical Drawing

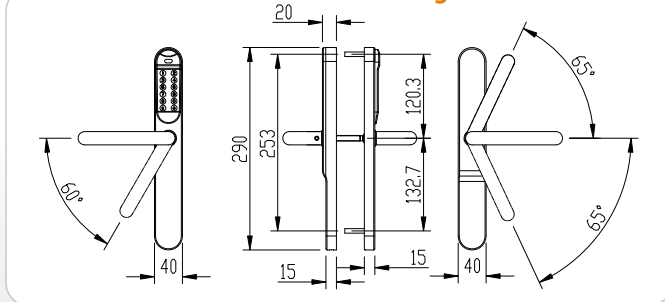

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card, pincode and mobile Bluetooth door opening.
- Default hidden mechanical key override design(electronic key override as option).
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 290mm × 40mm × (Outer 15 / Inner 20) mm
- Spindle Available: Standard mortise lock 8 mm (7.0mm, 7.6mm, 8.5mm, 9mm option)
- Handle Condition: Free wheeling under lock condition, maximum Angle 65°upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AAA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour



Finishes




Certifications



Narrow HB Electronic Handle Lock

EXLH-HB20

The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

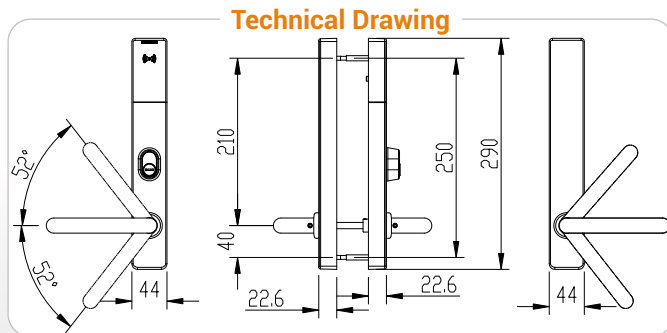

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card and mobile Bluetooth door opening.
- Default mechanical key for backup unlocking; electronic key for backup unlocking is optional.
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



Datalink
Virtual

Mobile
Virtual

Wireless
Online

* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 290mm × 44mm × 22.6mm
- Spindle Available: Standard mortise lock 8 mm
- Handle Condition: Free wheeling under lock condition, maximum Angle 52° upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AAA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour



Finishes




Certifications



Narrow HB Electronic Handle Lock (Password)

EXLH-HB21

The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

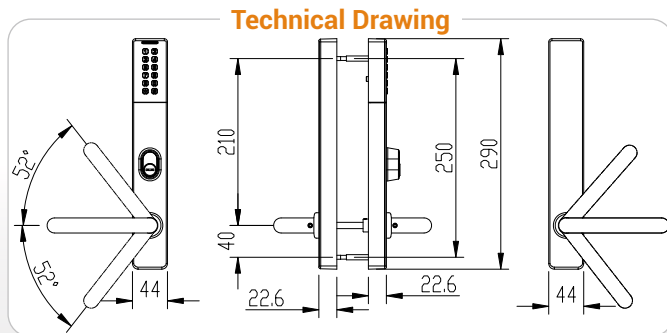

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card, pincode and mobile Bluetooth door opening.
- Default mechanical key for backup unlocking; electronic key for backup unlocking is optional.
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



Datalink Virtual Mobile Virtual Wireless Online

* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 290mm × 44mm × 22.6mm
- Spindle Available: Standard mortise lock 8 mm
- Handle Condition: Free wheeling under lock condition, maximum Angle 52° upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AAA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour



Finishes



Certifications




Wide HB Electronic Handle Lock

EXLH-HB30

The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

Technical Drawing

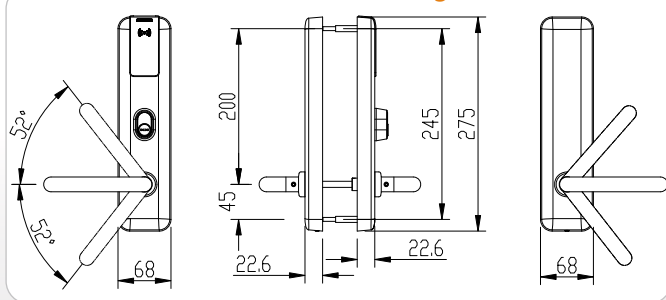

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card and mobile Bluetooth door opening.
- Default mechanical key for backup unlocking; electronic key for backup unlocking is optional.
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 275mm × 68mm × 22.6mm
- Spindle Available: Standard mortise lock 8 mm
- Handle Condition: Free wheeling under lock condition, maximum Angle 52° upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour



Finishes




Certifications



Wide HB Electronic Handle Lock (Password)

EXLH-HB31

The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

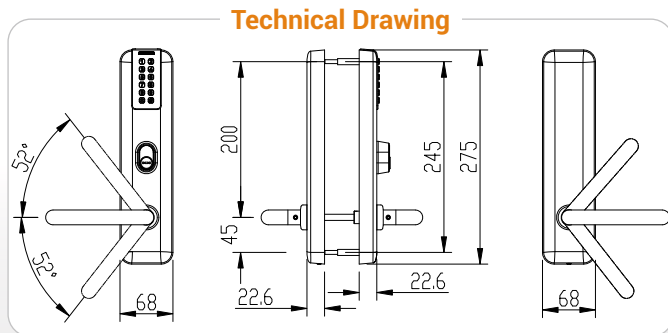

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card, pincode and mobile Bluetooth door opening.
- Default mechanical key for backup unlocking; electronic key for backup unlocking is optional.
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



Datalink Virtual Mobile Virtual Wireless Online

* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 275mm × 68mm × 22.6mm
- Spindle Available: Standard mortise lock 8 mm
- Handle Condition: Free wheeling under lock condition, maximum Angle 52° upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour



Finishes



Certifications




European Panic Bar Lock

EXLH-EP60

The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

Technical Drawing

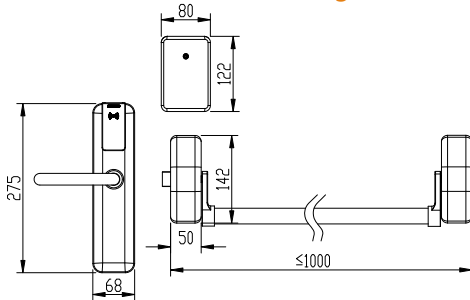

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card and mobile Bluetooth door opening.
- Default hidden mechanical key override design(electronic key override as option).
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



Datalink Virtual Mobile Virtual Wireless Online

* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 275mm × 68mm × 22.6mm
- Spindle Available: Standard mortise lock 8 mm
- Handle Condition: Free wheeling under lock condition, maximum Angle 52° upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour



Finishes




Certifications



The EVOXS E-Handle series is designed for scenarios that turn on frequently and require extra strength, this is a flexible and reliable solution and innovative and solid locking mechanism which supports the latest RFID and BLE technology. E-handle is compatible with most door lock applications, easy to install, while integrating powerful management applications.

Technical Drawing

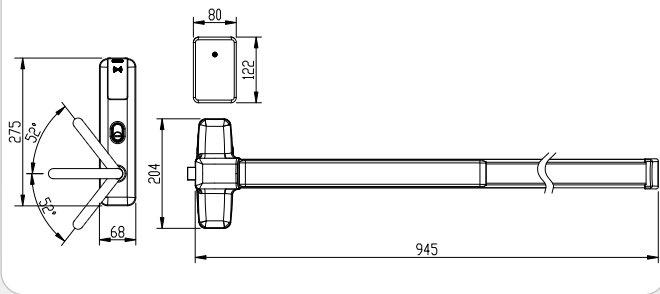

Product Features

- Made of stainless steel, optimizing mechanical strength.
- Surface passivation treatment, anti-fingerprint finish for enhanced aesthetics.
- Can be mounted directly on doors made of wood, glass or metal.
- Can be adjusted according to the actual situation of the door (left and right opening / inside and outside opening).
- AES-256 Encrypted Communication & Secure Local Storage.
- Support Mifare card and mobile Bluetooth door opening.
- Default hidden mechanical key override design(electronic key override as option).
- Use mobile phone to update the Settings, which is convenient and fast.
- No authorization, lift the exterior handle to engage the deadbolt(optional)*.
- Anti-panic function: depress the internal handle to unlock and exit instantly*.
- Support for door status and lock status abnormality alerts*.

ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

Technology Platform



* Used in conjunction with relevant lockcase

Technology Parameter

- Door Thickness: 38 to 120 mm
- Size: 275mm × 68mm × 22.6mm
- Spindle Available: Standard mortise lock 8 mm
- Handle Condition: Free wheeling under lock condition, maximum Angle 52° upward and downward tilt
- Salt Spray Test: 96 hours (optional 240 hours)
- Undervoltage Indication: Low voltage alarm, after the alarm can open 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 3 AA alkaline batteries, up to 20,000 cycles for 1 year (depending on usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

Reader Colour



Finishes



Certifications

