
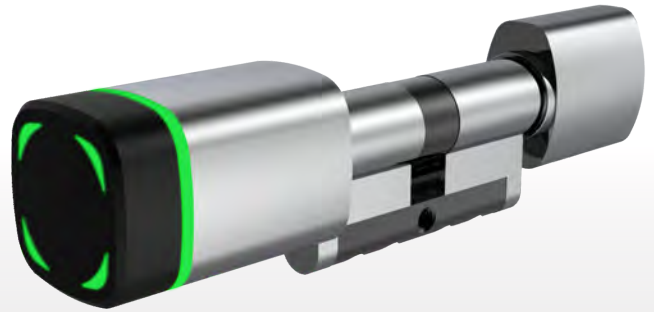


# Electronic European Profile Single Cylinder

EXLC-EP10

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

## Technical Drawing

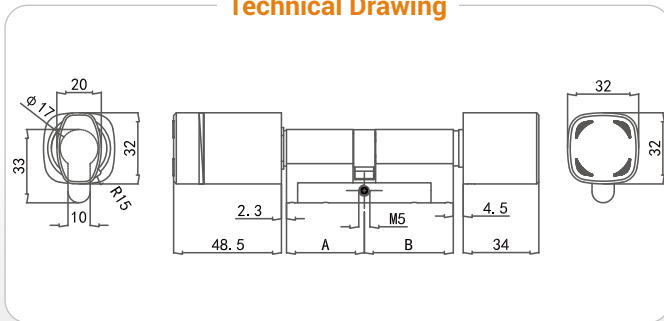

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Cylinder Size: One side's length ranges from 30 to 90 mm, with increments of 5 mm. Pairing is possible within this range.
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Under Voltage Warning: low voltage alarm, alarm can be opened 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications





# Electronic European Profile Double Cylinder

EXLC-EP20

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

## Technical Drawing

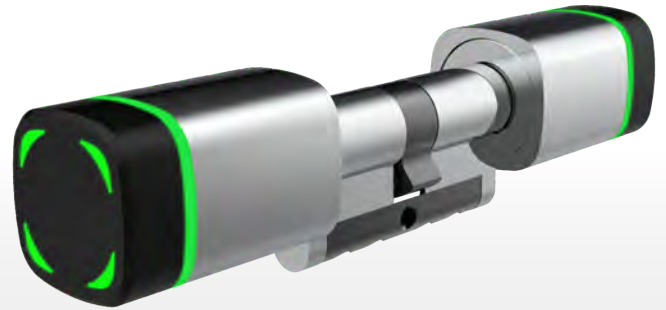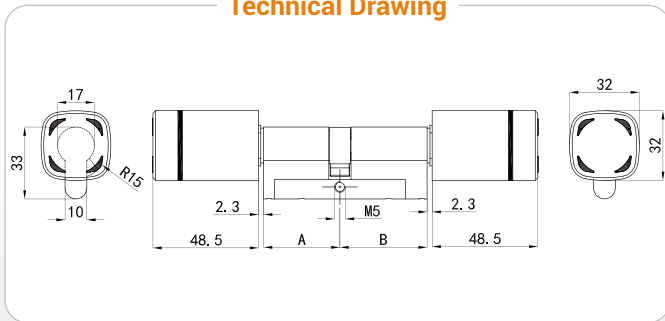

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Cylinder Size: One side's length ranges from 30 to 90 mm, with increments of 5 mm. Pairing is possible within this range.
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Under Voltage Warning: low voltage alarm, alarm can be opened 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications





# Electronic European Profile Half Cylinder

EXLC-EP30

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

## Technical Drawing

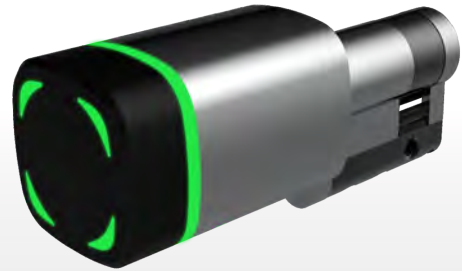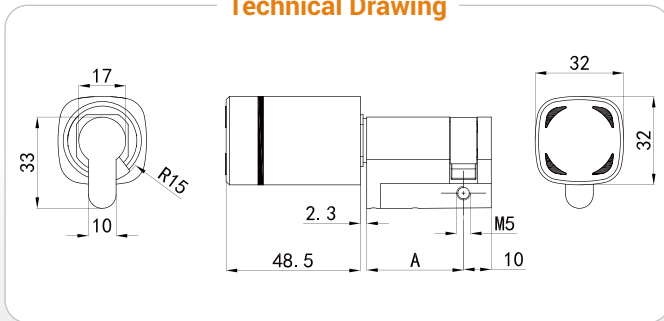

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Cylinder Size: One side's length ranges from 30 to 90 mm, with increments of 5 mm.
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Under Voltage Warning: low voltage alarm, alarm can be opened 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications





# Electronic Swiss Profile Single Cylinder

EXLC-SW10

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

## Technical Drawing

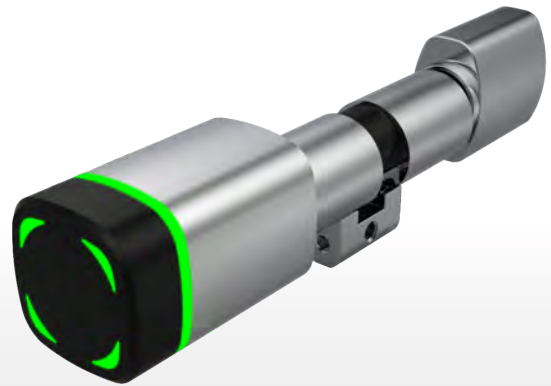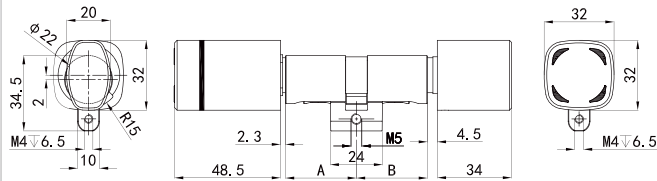

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Cylinder Size: One side's length ranges from 32.5 to 62.5 mm, with increments of 5 mm. Pairing is possible within this range.
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Under Voltage Warning: low voltage alarm, alarm can be opened 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications





# Electronic Swiss Profile Double Cylinder

EXLC-SW20

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

## Technical Drawing

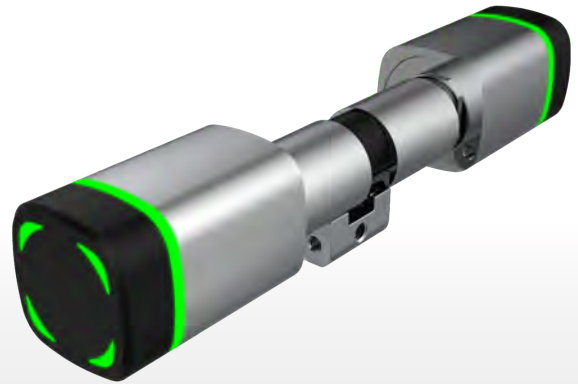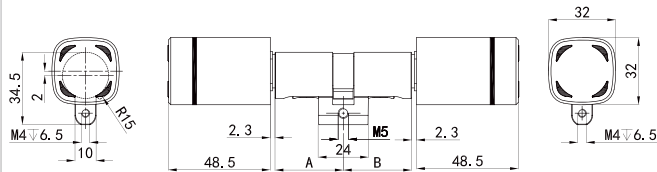

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Cylinder Size: One side's length ranges from 32.5 to 62.5 mm, with increments of 5 mm. Pairing is possible within this range.
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Under Voltage Warning: low voltage alarm, alarm can be opened 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications





# Electronic Swiss Profile Half Cylinder

EXLC-SW30

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

## Technical Drawing

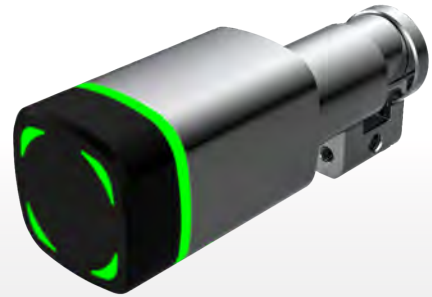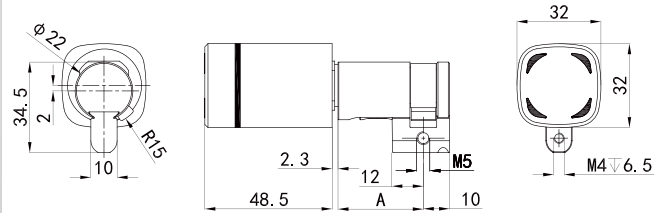

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



Datalink  
Virtual



Mobile  
Virtual



Wireless  
Online

## Technology Parameter

- Cylinder Size: One side's length ranges from 32.5 to 62.5 mm, with increments of 5 mm.
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Under Voltage Warning: low voltage alarm, alarm can be opened 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications





# Electronic Australian Oval Profile Cylinder

EXLC-A000

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

## Technical Drawing

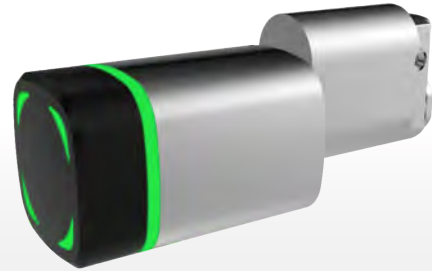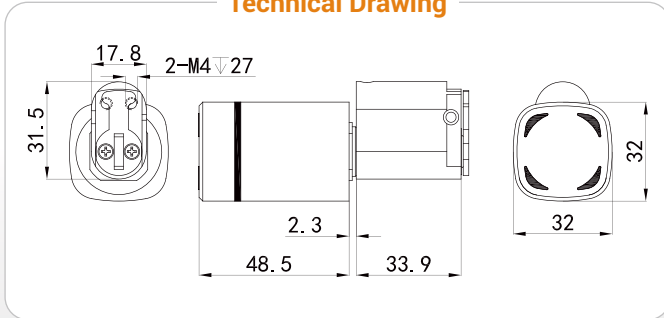

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



Datalink  
Virtual



Mobile  
Virtual



Wireless  
Online

## Technology Parameter

- Cylinder Size: Standard 33.9 mm, compatible with standard Australian-standard extension blocks (available in 7 mm, 10 mm, and 24 mm thicknesses).
- Pick Size: Australian standard 'X' back cam
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Under Voltage Warning: low voltage alarm, alarm can be opened 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications





# Electronic Scandinavian Oval Profile Cylinder

EXLC-S000

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

Technical Drawing

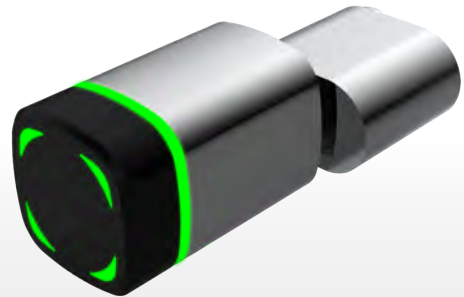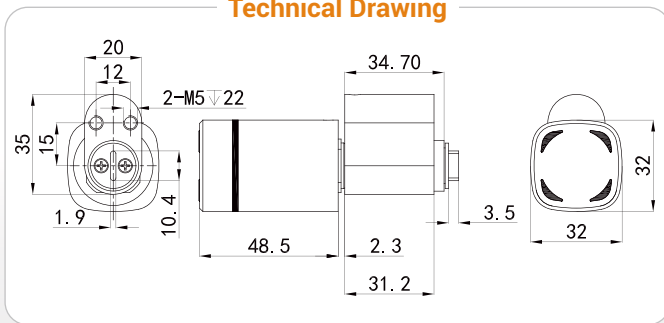

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Cylinder Size: standard size 31.2mm.
- Pick Size: Nordic standard 'S' back cam
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Under Voltage Warning: low voltage alarm, alarm can be opened 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications







# Electronic ANSI Mortise Profile Cylinder

EXLC-MC00

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

Technical Drawing

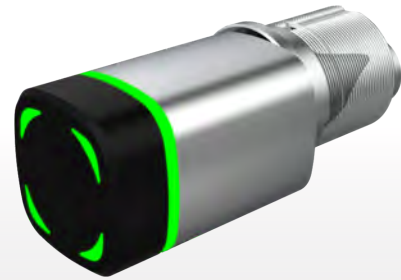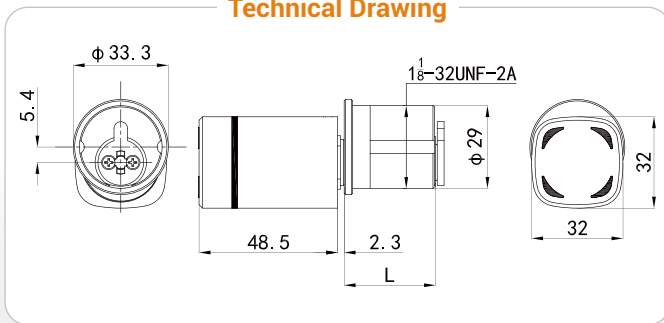

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Cylinder Size: Standard 1-1/8", optional 1-3/8" 1-1/2" 1-5/8" 1-3/4" 2".
- Pick Size: American standard mortise 'A' back cam
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Under Voltage Warning: low voltage alarm, alarm can be opened 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications





# Electronic ANSI RIM Profile Cylinder

EXLC-RC00

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

## Technical Drawing

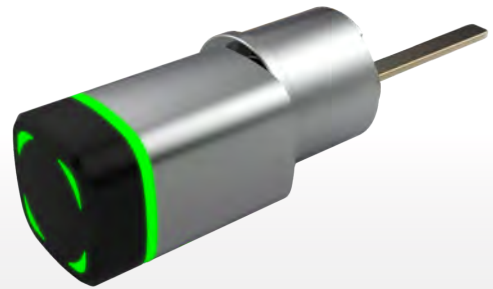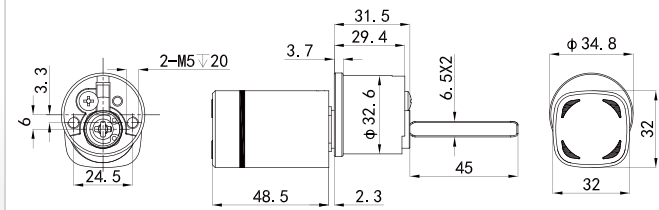

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Cylinder Size: Standard size 31.5mm.
- Pick Size: American standard rim 'R' Tailpiece
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Under Voltage Warning: low voltage alarm, alarm can be opened 100 times
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications




# Electronic Padlock

EXLC-PL00

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

## Technical Drawing

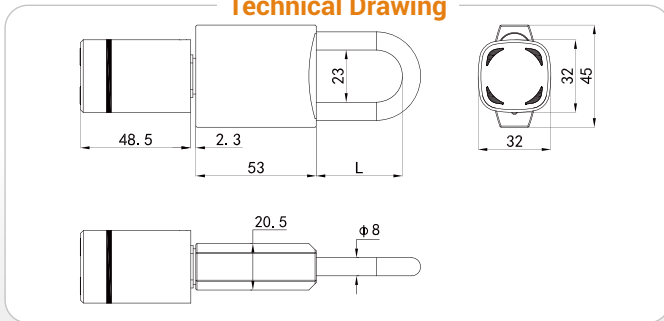

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Shackle Length: Standard 27mm, optional 38mm, 50mm, 75mm
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications




# Electronic CamLock

EXLC-CL00

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

Technical Drawing

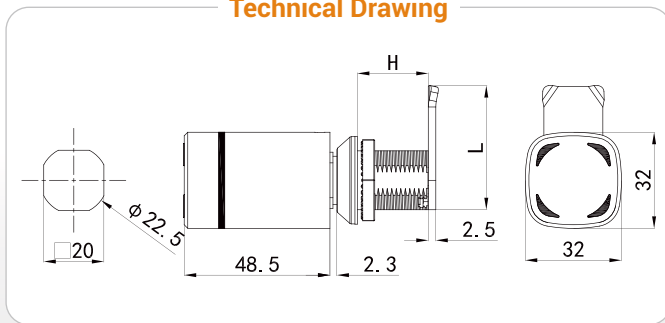

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Applicable Door Thickness: 2mm-22mm
- Stop Height: Standard 24mm, can be selected according to customer needs
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications





# Electronic Deadbolt Lock

EXLC-DL00

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

Technical Drawing

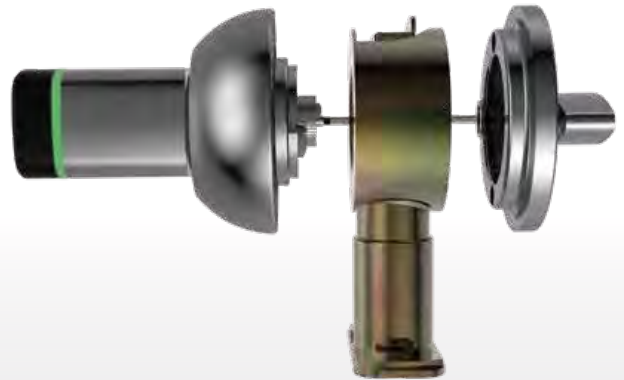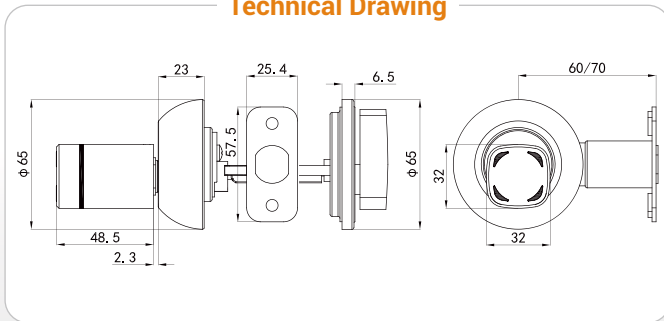

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



## Technology Parameter

- Applicable Door Thickness: 30 to 50 mm
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications




# Electronic Glassdoor Lock

EXLC-GL00

The EVOXS E-Cylinder series is part of the product family and supports the latest RFID, BLE and other technology, it designed for high-strength door scenarios, this is a flexible and reliable solution.

## Technical Drawing

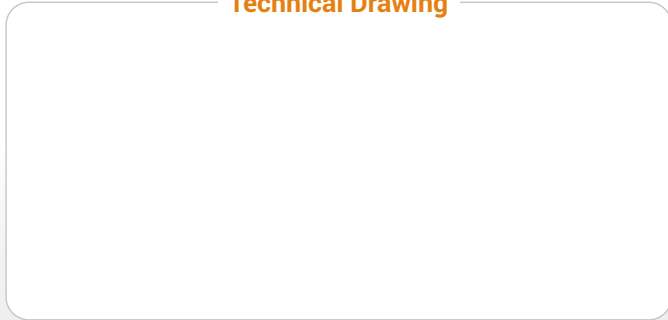

## Product Features

- High security, using AES256 encryption processing.
- The lock cylinder features a high-strength anti-pry design.
- Support Mifare card, pincode, NFC and mobile Bluetooth opening.
- Integrated with smart key system for emergency opening.
- Replace the battery without removing the cylinder (special tool).
- The cylinder body consists of detachable modules, allowing for easy assembly and maintenance.
- Use mobile phone to update the Settings, which is convenient and fast.

## ID Technology

- RFID, Mifare Classic, Mifare DesFire
- NFC, mobile unlocking
- BLE ID, compatible with online connection

## Technology Platform



Datalink  
Virtual



Mobile  
Virtual



Wireless  
Online

## Technology Parameter

- Applicable Door Thickness: 5 to 30 mm
- Salt Spray Test: 96 hours (integral), knob housing up to 240 hours
- Bluetooth Communication Distance: Less than 10m
- Power Supply: 1 CR2 battery Up to 16000 times cycle 1 year (Determined by usage)
- Audit Trail: Save the latest 500 events
- Temperature: -25°C to +65°C
- Humidity: 20% to 93 %

## Reader Colour



## Finishes



## Certifications

