



Wireless Electronic Locking

Flexible Locking for Commercial

Ningbo Rayonics Technology Co., Ltd

2nd Floor, West of Building 6, Lingyun Industrial Park,
No.1177 Lingyun Rd, National Hi-tech Zone , Ningbo, China

+86-574-879 01840

+86-574-879 10096

sales@rayonics.com.cn



www.evoxsystem.com

Customizable wireless lock control system



System Feature



Security

Communication and data dual security, effectively ensuring the safety of commercial spaces.



Smart

Intelligence, modularization, and diversification, empowering intelligent commercial space management.



Smooth

Customer demand-oriented opening methods, extremely enhancing user experience.



Stylish

Simple design and high-end surface treatment, showcasing professional taste in applications.



Seamless

Quick integration and seamless connection with third-party systems, improving management efficiency.



From flexible management for homes, public rental housing, and shared offices to specialized operations in retail, hotels, education, hospitals, and corporate groups, our system provides a customizable smart space solution.

It not only deeply integrates into physical scenarios but also natively supports the construction and management of virtual networks and online applications, bridging online and offline operations, and providing a secure, intelligent, seamlessly connected, and highly customizable unified digital foundation for various spaces and businesses.

Scenario Options

EVOXS access control solutions should be used globally in a range of challenging and unique applications and facilities. Easily and securely manage entrances to your home, office, and shared work area. Whatever your use case, our system fits seamlessly, making everyday life easier.



Home



Rental House



Share Space



Retail Store



Hotel



Office



Educational Institution



Group Company



Hospital

System Options

Each management model has its own advantages and disadvantages. By focusing on security, economy, or convenience, and selecting lock products, auxiliary equipment, and door opening methods, the most suitable application configuration and management solution can be chosen.

Software Name	Feature Description
EVOXS Local Lock Manager	A lock control management solution based on the CS architecture, suitable for small and medium-sized projects such as small hotels and offices. Device installation, unbinding, and other management tasks are performed via the EVOReady APP.
EVOXS Web Commercial Access	An access control lock management software based on a cloud platform, centrally managing access control for large facilities such as schools and hospitals. Device installation, unbinding, and other management tasks are performed via the EVOReady APP.
EVOXS Web Multi-family	An access control lock management software based on a cloud platform, suitable for multi-point property management applications such as single/multi-unit residences, shared spaces, multi-store retail, and rental properties. Device installation, unbinding, daily use, and other management tasks are performed via the EVOHost APP.



EVOReady

A companion application for EVOXS software, designed specifically for operators. It includes features such as installing locks and unbinding devices.



EVOEntry

A companion application for EVOXS software, designed specifically for general users. It includes features such as unlocking doors and viewing device information.



EVOHost

A companion application for EVOXS software, designed specifically for home and individual users. It provides features such as device installation and unlocking, using the app as the central hub for independent management and door access.



EVOGuest

A companion application for EVOXS software, designed specifically for hotel guests. It includes features such as viewing reservations and unlocking doors.

Open Platform



EVOXSAPI




EVOXSSDK



EVOXSTech


System Solution

The integrated lock control security system combines electronic lock products, auxiliary equipment and management software to provide customers with a free-installation, easy maintenance and configurable application solution, which is a solution for access control anytime and anywhere.

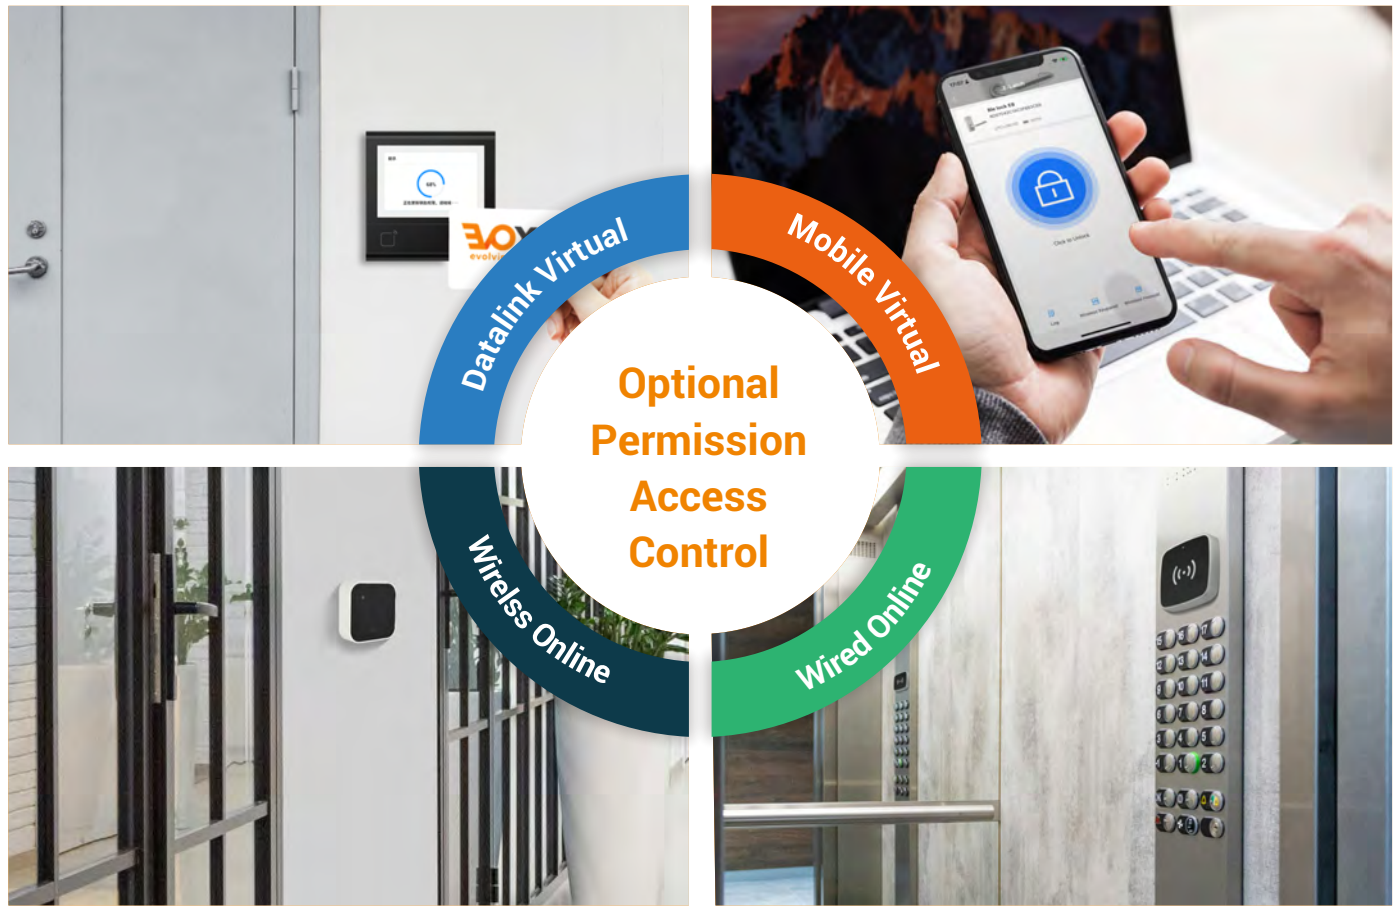


Mode	Security Level	Permission Change Frequency	Application Scenarios	Permission Validity Period	Initial Setup and Code Update	Permission Change /Status Update/ Blacklist Setup	Lock Support
Virtual Network Mode	Medium	Time segment permissions or activation-required time table permissions, with low update frequency	Small distributed buildings and large centralized buildings	Long-term permissions, activated for use at set times	Via handset encoder	Permissions set within frames or opening media via encoder	Full range of locks
Online Network Mode	High	Time table permissions, with high update frequency	High-security venues	Primarily temporary	Via handset encoder	Real-time remote interaction via network	Full range of locks


Door Opening Methods




Online Link



APP Bluetooth



Card



Password/Pincode

Peripheral Device



Local Encoder

As a encoding medium connected to workstations, it integrates RFID and BLE communication functions, supporting initialization settings, daily use, and maintenance of lock control.

- Radio Frequency: 13.56MHz
- Read/Write Distance: Less than 3cm
- Communication Interface: USB interface
- Power Supply Interface: USB interface
- Supported Card Types: Mifare S50, S70, Mifare Desfire



Network Encoder

As an encoding medium installed in public areas, it controls access via network cable connection and can also be used for data updates of opening media and log downloads.

- Installation Method: Wall-mounted
- Communication Method: Low-power Bluetooth
- Operating Power Supply: DC 9V-15V
- Read/Write Distance: Less than 10cm
- Network Connection: PoE, RS485



Smart Gateway

As an encoding medium connecting RF locks and servers, it can promptly read unlocking records and report alarm information; it also enables remote permission change management, clock calibration, and remote unlocking functions.

- Installation Method: Top-mounted installation
- Communication Method: Low-power Bluetooth
- Communication Distance: Indoor applications less than 10/15m
- Network Connection: PoE (5V power adapter optional), WiFi
- Connection Capacity: ≤10 locks



WiFi Gateway

As an encoding medium connecting RF locks and servers, it supports real-time permission updates, door opening and status log uploads, open network protocols, facilitating platform integration or self-developed hotspot devices.

- Installation Method: Adhesive-mounted installation
- Communication Method: Low-power Bluetooth
- Communication Distance: Open line-of-sight 10m
- Network Connection: WiFi
- Connection Capacity: ≤5 locks



Smart Card Dispenser

The smart card dispenser is a device used for storing and managing cards, suitable for scenarios such as hotels and shared rentals. It supports card creation using QR codes and order codes, effectively reducing management costs and improving operational efficiency.

- Screen Size: 3.3-inch HD LCD touchscreen
- Operating Power Supply: 200-240V 2.5A; 100-120V 2.0A
- Maximum Power: 50W
- Supported Card Dimensions: Card length 85±0.5mm, width 54±0.5mm, thickness 0.7–1.0mm
- Card Box Capacity: 200 cards (calculated based on card thickness 0.76mm)

Datalink Virtual

For wireless electronic locks, access permissions are stored in the unlocking medium.


Datalink Virtual technology uses a medium-based access authorization approach. After the lock is installed, an encoding device writes the unlocking permissions onto a card or key, allowing users to unlock doors using their authorized medium.

Solution Features

- Wireless application to keep operating costs low.
- Easy upgrades for quick and convenient installation.
- Security risk reduction through configurable verification periods.
- Strict security authentication, data encryption, and high safety levels.
- No need for on-site updates—permissions are stored in the unlocking medium.



Application Features



Through computer-assisted local encoders, centralized management and authorization are achieved, designed with a card-centric approach to add new users, delete old users, modify existing user permissions, and collect door opening and closing events.




The system can be set up and installed through mobile phone or portable encoder, which also gathers records and facilitates daily lock status checks and maintenance, making the functionality simple and user-friendly.



The card itself carries permissions and event records, enabling integration with elevator controllers, access control, fire safety systems, and more for a one-card solution expansion, achieving centralized management and control.




The system operation is straightforward and intuitive, with a user-friendly interface design that eliminates the need for additional specialized maintenance organizations or professional personnel to follow up on upkeep.

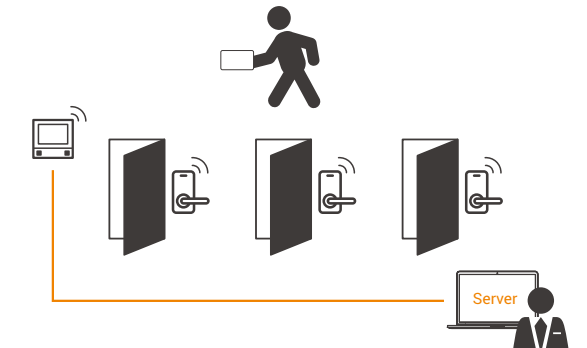




Software Type

Software Name	Feature Description
EVOXS Local Lock Manager	A lock control management solution based on the CS architecture, suitable for small and medium-sized projects such as small hotels and offices. Device installation, unbinding, and other management tasks are performed via the EVORReady APP.
EVOXS Web Commercial Access	An access control lock management software based on a cloud platform, centrally managing access control for large facilities such as schools and hospitals. Device installation, unbinding, and other management tasks are performed via the EVORReady APP.

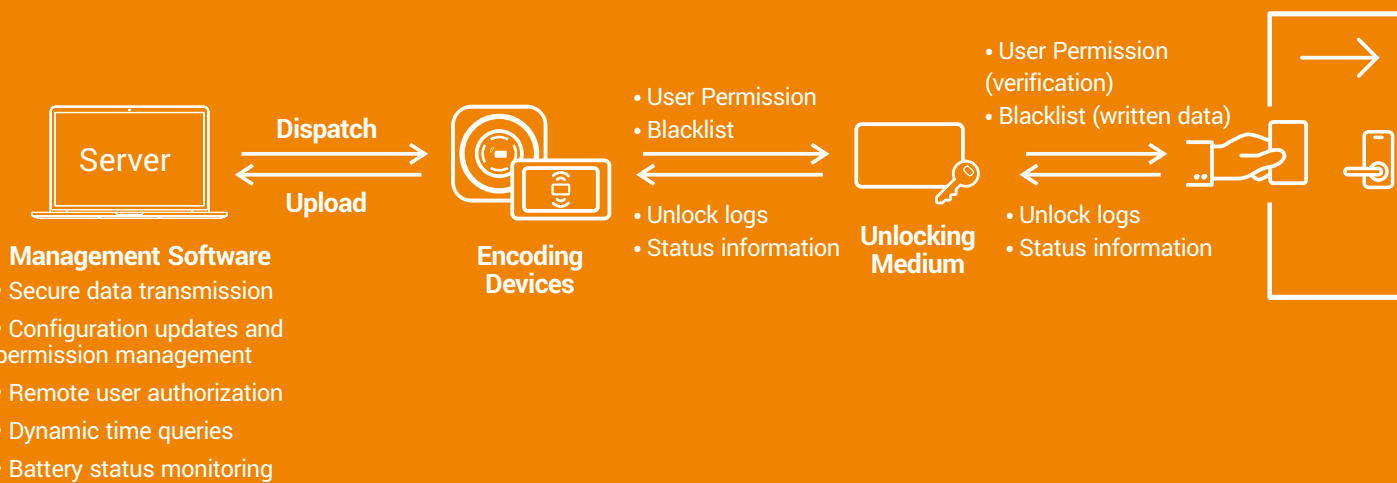

*Only employee cards and blacklist cards carry blacklist data.

Applicable Scene

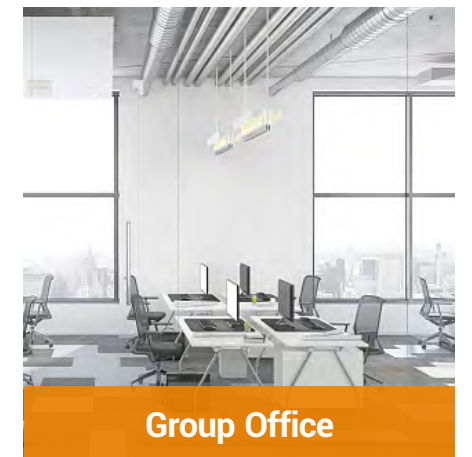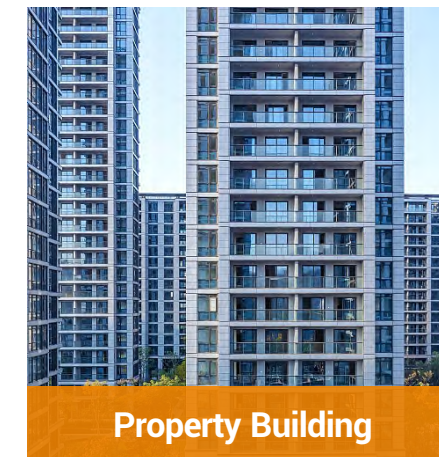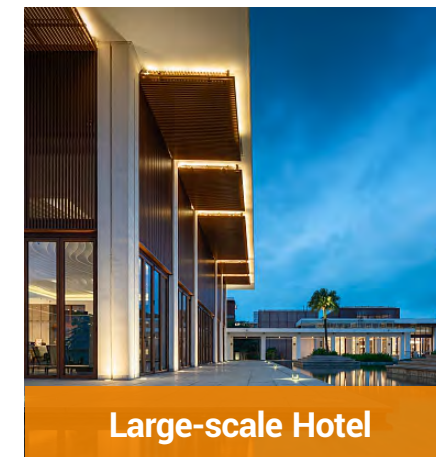


Mobile Virtual

Smartphones have become an essential part of daily life, and now they can also function as keys for access control systems.

Mobile Virtual is a mobile-based access control solution. Using a smartphone app, users can configure and authorize locks during installation, enabling efficient management. Digital keys can be sent to users with a single click, allowing them to receive and use their keys anytime, anywhere.

Solution Features

- Unlock electronic locks using a smartphone—fast, convenient, and user-friendly.
- Smartphones serve as both a management tool and an unlocking device.
- User permissions and access logs are displayed within the mobile app.
- Smartphone authorization and verification follow strict security authentication for high safety.
- Unlocking via a smartphone works with or without an internet connection.

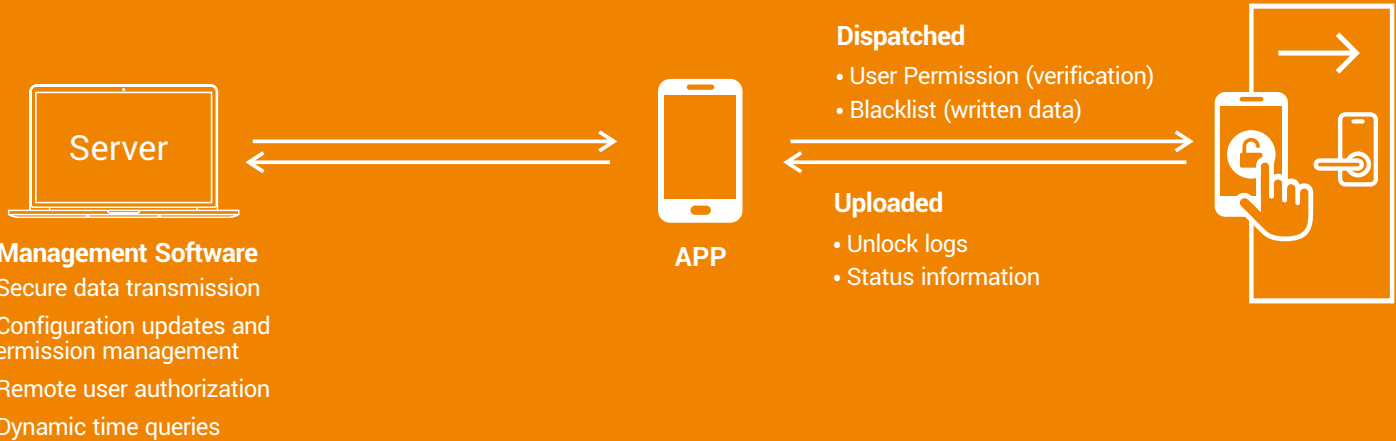


Application Features

- Unified configuration via portable encoder or mobile phone. Permissions are set and written directly into the lock using a unified handset device or mobile phone, with access logs recorded on the phone—simple and user-friendly.
- The system can be configured and managed through a unified cloud platform or via local management software, with synchronized execution across devices.
- All permissions are stored within the lock itself, with door access verified by card ID, making it ideal for retrofitting existing card-based systems into a unified "one-key" access solution.

Software Type

Software Name	Feature Description
EVOXS Local Lock Manager	A lock control management solution based on the CS architecture, suitable for small and medium-sized projects such as small hotels and offices. Device installation, unbinding, and other management tasks are performed via the EVOReady APP.
EVOXS Web Commercial Access	An access control lock management software based on a cloud platform, centrally managing access control for large facilities such as schools and hospitals. Device installation, unbinding, and other management tasks are performed via the EVOReady APP.
EVOXS Web Multi-family	An access control lock management software based on a cloud platform, suitable for multi-point property management applications such as single/multi-unit residences, shared spaces, multi-store retail, and rental properties. Device installation, unbinding, daily use, and other management tasks are performed via the EVOHost APP.

Applicable Scene

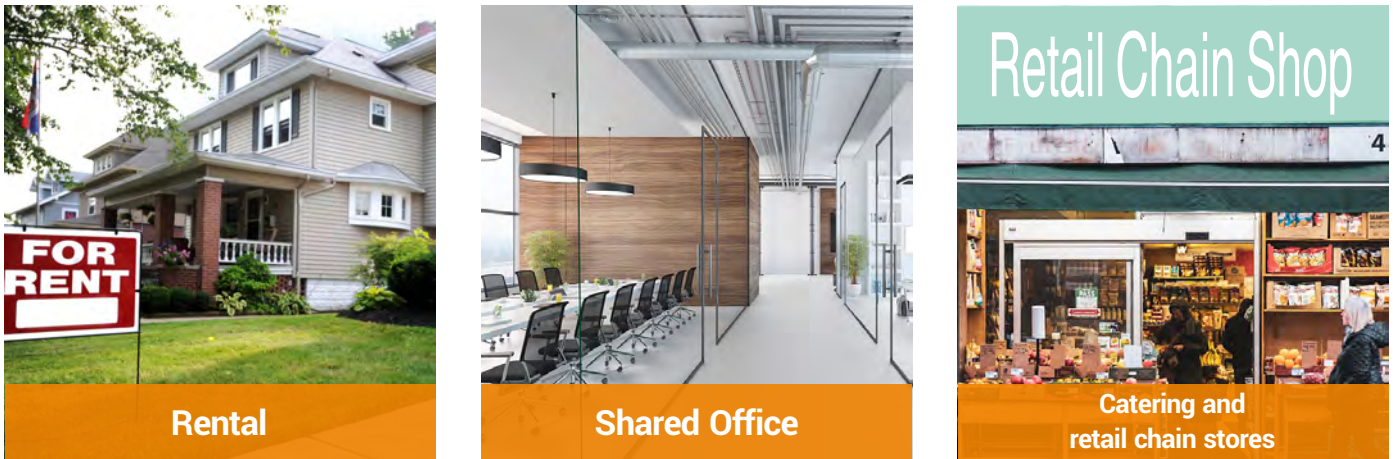

Wireless Online


Wireless communication technology enables a cable-free, high-security networking solution. It allows real-time response for daily operations and remote device status monitoring for proactive alerts.

Wireless Online is an easy-to-use solution designed for high-security environments requiring real-time door lock status tracking and management. It uses a wireless online mode, connecting the EVOXS platform software and locks via a smart gateway for live monitoring, data collection, and real-time updates.

Solution Features

- Cost-effective and high-performance.
- Ideal for high-security applications.
- Enables door monitoring, remote control, and event transmission.
- Supports both lock-based and card-based permissions.
- Efficient updates and centralized management.

Application Features



The system can be set up and installed by unified portable encoder, which also collect records, and complete the daily lock status check and maintenance. It is convenient to use and easy technical to operate.




When the device is online, it can update permissions, modify configuration and collect event records in real time. When the device is offline, it can be applied through the mode of presetting permissions to the card.



It can synchronize the key of authority management online, change the authority instantly, and monitor the lock status and open and close records online.




The online solution realizes the bidirectional encrypted communication between the lock device and the online gateway, and the real-time communication can effectively monitor the system usage and modify the device configuration in real time.

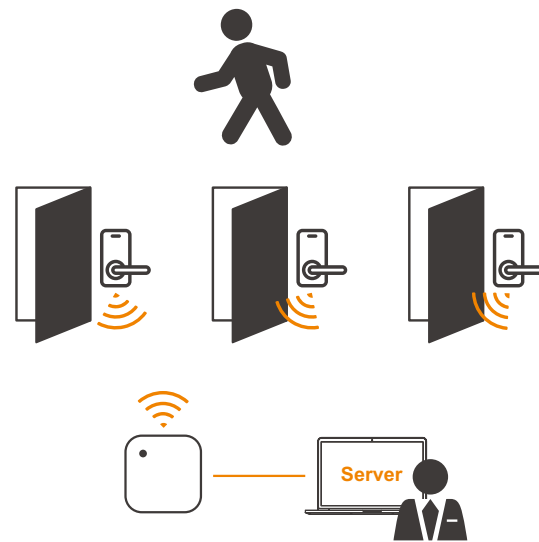

Software Type

Software Name	Feature Description
EVOXS Local Lock Manager	A lock control management solution based on the CS architecture, suitable for small and medium-sized projects such as small hotels and offices. Device installation, unbinding, and other management tasks are performed via the EVORReady APP.
EVOXS Web Commercial Access	An access control lock management software based on a cloud platform, centrally managing access control for large facilities such as schools and hospitals. Device installation, unbinding, and other management tasks are performed via the EVORReady APP.

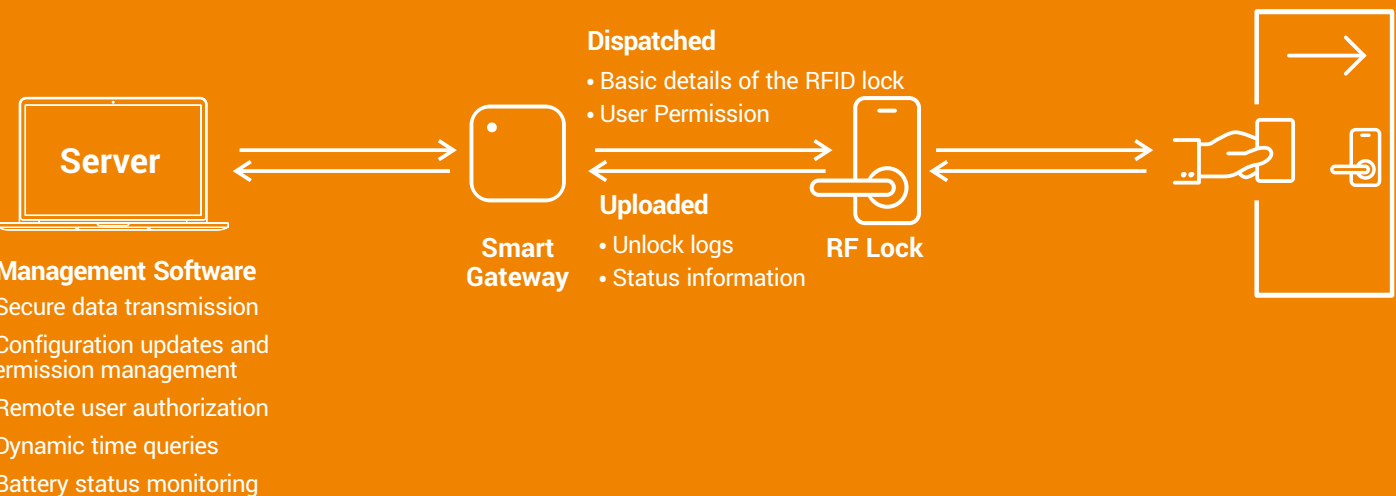

Applicable Scene



Small Office



Small Building



Small Studio

Wired Online

As the most widely used access control system, wired solutions help protect assets and create a safer environment for employees, vehicles, and visitors.


Wired Online is suitable for high-security, high-management-cost scenarios. It operates in a wired online mode, ensuring real-time lock monitoring, data collection, and updates.

Solution Features

- Always online for high-performance security.
- Suitable for environments with frequently changing access permissions.
- Allows monitoring, remote unlocking, and event transmission.
- Integrates online, lock-based, and card-based permissions
- Real-time updates and verification.
- Supports Three Unlocking Verification Methods: Single Verification, Multi-Factor Verification, High-Security Verification.



Application Features



The system can be set up and installed by unified portable encoder, which also collect records, and complete the daily lock status check and maintenance. It is convenient to use and easy technical to operate.




When the device is online, it can update permissions, modify configuration and collect event records in real time. When the device is offline, it can be applied through the mode of presetting permissions to the card.



It can synchronize the key of authority management online, change the authority instantly, and monitor the lock status and open and close records online.






The online solution realizes the bidirectional encrypted communication between the lock device and the online gateway, and the real-time communication can effectively monitor the system usage and modify the device configuration in real time.

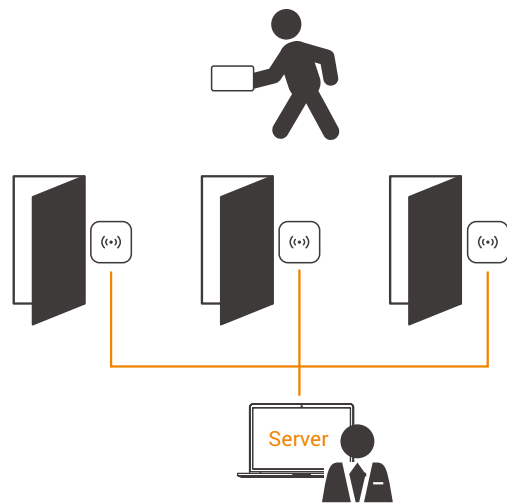

Software Type

Software Name	Feature Description
EVOXS Local Lock Manager	A lock control management solution based on the CS architecture, suitable for small and medium-sized projects such as small hotels and offices. Device installation, unbinding, and other management tasks are performed via the EVOReady APP.
EVOXS Web Commercial Access	An access control lock management software based on a cloud platform, centrally managing access control for large facilities such as schools and hospitals. Device installation, unbinding, and other management tasks are performed via the EVOReady APP.

Applicable Scene

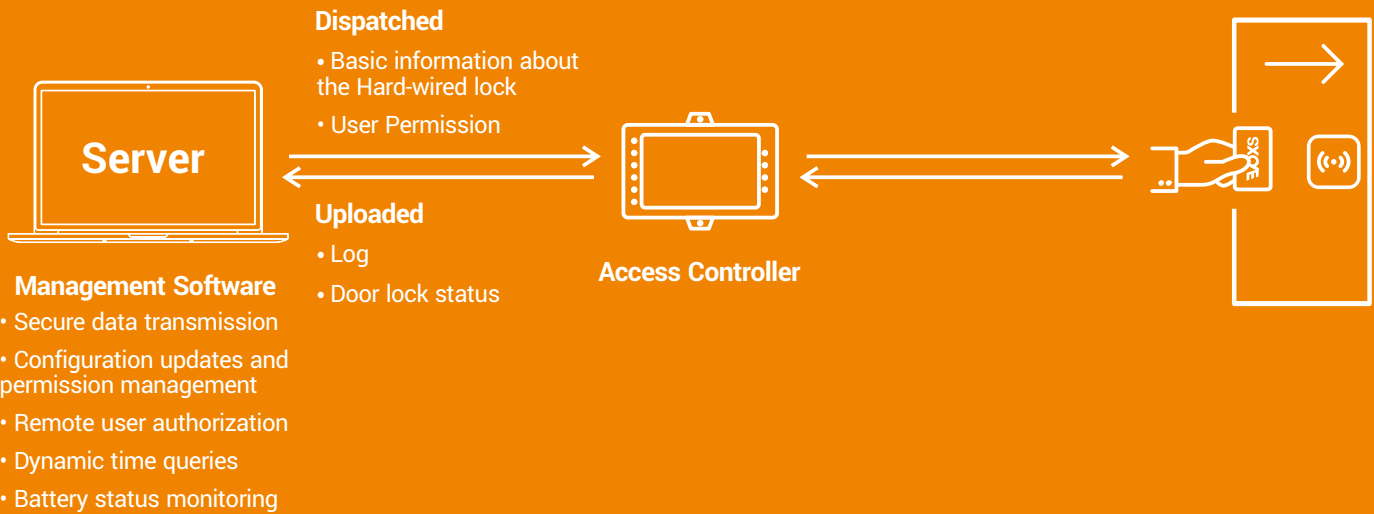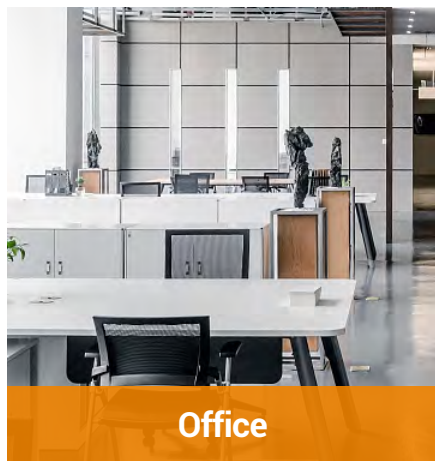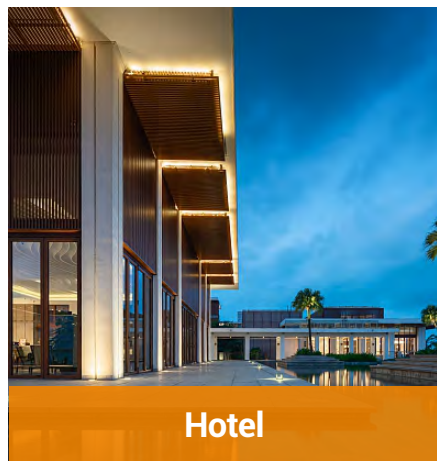

E-Cylinder




The EVOXS E-Cylinder series enables quick replacement and use of traditional mechanical cylinders, offers multiple lock types to choose from, and provides electronic key as backup opening methods. It is the most cost-effective security solution on the market.

This series includes European profile cylinders, Swiss profile cylinders, ANSI profile cylinders, Scandinavian profile cylinders, glass door cylinders, and special types such as padlocks and cam lock cylinders, providing comprehensive locking solutions for different markets.

Product Features

- Built-in security chip with AES256 encryption.
- High-strength cylinder plug with anti-pry design.
- Allows quick and easy replacement of mechanical lock cylinders with electronic ones.
- The cylinder body consists of detachable modules for easy assembly and maintenance.
- Flexible configuration of various management functions based on different management systems.
- Enables full lifecycle management including installation, setup, and maintenance via mobile phone.
- Supports unified management systems for online authorization and virtual network authorization applications.
- Supports mainstream door opening methods such as RF cards, passwords, NFC, and mobile Bluetooth.
- Supports emergency opening applications using smart key systems.

The communication between the Peripheral Device and the lock is encrypted and protected.

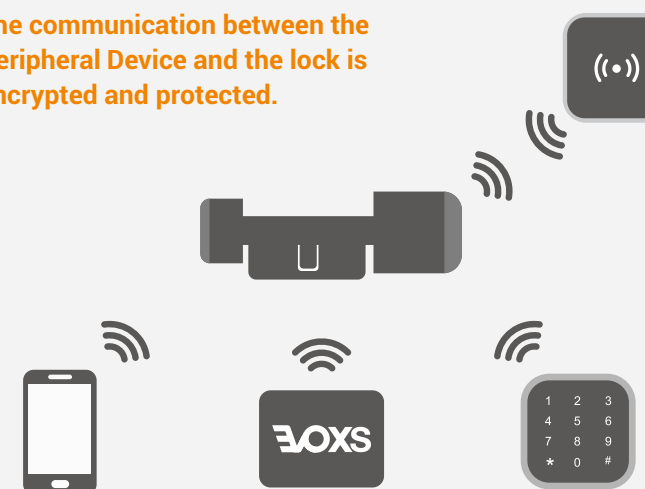

Supported Modes:
Standard Mode
Auto Opening Mode
Toggle Mode
Time Toggle Mode
Time Forbidden Mode
Safe Mode
Time Safe Mode

Supported Systems:
All Software Systems

Special Features:
Wireless Upgrade and Maintenance

Technical Parameters

- Door Thickness: 35-180mm
- Battery Life: 1 CR2 battery supports up to 20,000 openings for 1 year (depending on usage)
- Number of User Permissions: 99 permissions per card, 2000 permissions per lock
- Event Logs: Stores the latest 500 events
- Communication Range: Bluetooth < 10m, RFID card < 2cm
- Low Voltage Alert: Low battery alarm, allows up to 100 openings after alarm
- Temperature: -25°C ~ +65°C
- Humidity: 20% ~ 93%

Lock Structure Options

- Surface Finish: Stainless steel, PVD
- Reader Color: Black, White
- Cam Support: Supports various types of cams

Optional Features

- Optional pincode panel for password authentication opening
- Optional smart gateway for real-time lock networking

Can be applied to various locking points
such as universal swing doors, sliding doors, cabinets, lockers, and electrical switches



Widely Applicable

Suitable for a variety of door varieties to choose from, such as different contours, colors and lengths. Highly integrated lock plugs provide maximum flexibility.



Easy to Install

Just use the intelligent lock to replace the mechanical cylinder NO. wiring, no drilling can complete the installation in a few minutes.



Friendly Design

Use the easy-to-interact APP to quickly complete the setup in a few minutes, and then you can also realize "touch the lock to unlock" and program maintenance and upgrade management.



Easy Maintenance

No need to remove the lock, remove the KNOB can quickly replace the battery, and support electronic key emergency door opening.



Authentication Test:

- CE certification
- RoHS certification
- FCC Certification
- 96 hours salt spray test
- IP66
- EN 1634-2 100 minutes
- EN15684
- 200,000 full cycle life tests

E-Handle



The EVOXS E-Handle series can replace existing mechanical panels of various door types without changing the mortise lock, enabling convenient and reliable access security control. To adapt to different door appearances, specifications, and colors, the electronic handle lock provides a variety of indoor handle options. With its refined design, safety, reliability, and easy installation, it is highly favored by users.

This series includes European profile narrow/wide handle locks, Australian profile narrow/wide handle locks, Scandinavian profile narrow/wide handle locks, ANSI wide handle locks, and push/pull handle locks, offering comprehensive application solutions for different customers.

Product Features

- Processed with AES256 encryption, providing a high level of security.
- Treated with passivation, suitable for harsh environments.
- Can be directly installed on wooden, plastic-steel, or metal doors.
- Can be adjusted according to the actual door situation (left/right opening, inward/outward opening).
- Independently designed clutch, with separated functions for precise maintenance.
- Flexibly configure various management functions according to different management systems.
- Full lifecycle management including installation, configuration, and maintenance is completed via mobile phone.
- Supports unified management systems for online authorization and virtual network authorization applications.
- Supports mainstream door opening methods such as RF cards, passwords, NFC, and mobile phone Bluetooth.
- Supports different emergency opening methods, with the option of using a smart key system for unlocking.

The communication between the Peripheral Device and the lock is encrypted and protected.



Supported Modes:
 Standard Mode
 Auto Opening Mode
 Toggle Mode
 Time Toggle Mode
 Time Forbidden Mode
 Private Mode (Requires compatible mortise lock)
 Time Private Mode (Requires compatible mortise lock)
 Safe Mode
 Time Safe Mode

Supported Systems:
 All Software Systems

Special Features:
 Wireless Upgrade and Maintenance

Technical Parameters

- Door Thickness: 35-180mm
- Spindle available: Standard 8mm (8.5mm, 9mm optional)
- Low Voltage Alert: Low battery alarm, allows up to 100 openings after alarm
- Communication Range: Bluetooth < 10m, RFID card < 2cm
- Power Supply: 3 alkaline batteries, up to 20,000 openings or a 2-year lifespan (depending on usage)
- User Capacity: 1,500 users
- Handle Depression: Free-spinning when locked, with a maximum angle of 65°
- Event Logs: Stores the latest 500 events
- Temperature: -20°C~ +65°C
- Humidity: 20% ~ 93%

Lock Structure Optiona

- Handle Shape: Type A, Type B
- Surface Finish: Stainless steel, PVD
- Reader Color: Black, White

Optional Features

- Optional Sensors: Door lock status sensor, door status sensor, handle status sensor
- Optional implementation methods for privacy functions.
- Optional waterproof gasket, base plate, and emergency lock cylinder.
- Optional keypad for password verification access.
- Optional smart gateway for real-time lock networking.

Suitable for almost all doors, likely for commercial or office buildings



Widely Applicable

Suitable for a variety of door varieties to choose from, such as different contours, colors and lengths. Highly integrated lock plugs provide maximum flexibility.



Easy to Install

Just use the intelligent lock to replace the mechanical lock core, free wiring, free opening, can complete the installation in a few minutes.



Friendly Design

Use the easy-to-interact APP to quickly complete the setup in a few minutes, and then you can also realize "touch the lock to unlock" and program maintenance and upgrade management.



Easy to Maintain

Easy battery replacement, with a variety of sensors, quickly locate product problems, while supporting product code upgrade.



High Reliability

Simple modular design, idling free handle design and high strength durability design.



Authentication Test:

- CE certification
- RoHS certification
- FCC Certification
- 96 hours salt spray test
- IP54
- 300,000 full cycle life tests

E-Latch




The EVOXS E-Latch, with its compact and sophisticated design, which is ideal for the intelligent retrofitting of split locks. It offers reliable security control without the need to replace the mortise lock, maintaining a stylish and premium appearance. To accommodate different door aesthetics, specifications, and colors, we provide a wide variety of handles. The refined design is safe, reliable, easy to install, and highly favored by users.

The EVOXS E-Latch series include European, Scandinavian, ANSI, and Australian profile locks, providing comprehensive application solutions for a global clientele.

Product Features

- Modern hyper-minimalist design with dual-curved surfaces for high aesthetic appeal.
- Processed with AES256 encryption, providing a high level of security.
- Can be directly installed on wooden, plastic-steel, or metal doors.
- Can be adjusted according to the actual door situation (left/right opening, inward/outward opening).
- Independently designed clutch, with separated functions for precise maintenance.
- Flexible configuration of various management functions based on different management systems.
- Enables full lifecycle management including installation, setup, and maintenance via mobile phone.
- Supports unified management systems for online authorization and virtual network authorization applications.
- Supports mainstream door opening methods such as RF cards, passwords, NFC, and mobile Bluetooth.

The communication between the Peripheral Device and the lock is encrypted and protected.

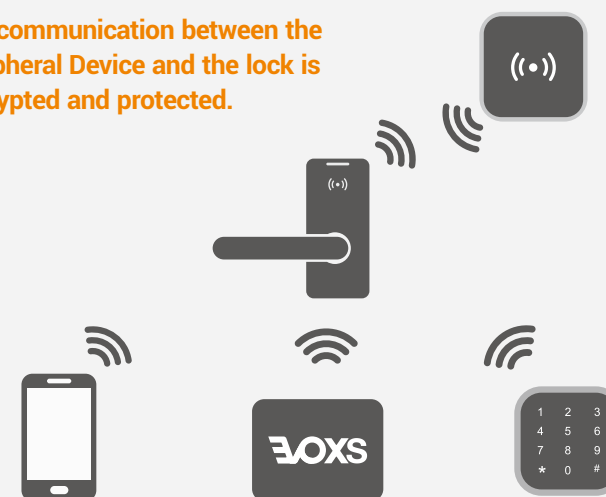

Supported Modes:
 Standard Mode
 Auto Opening Mode
 Toggle Mode
 Time Toggle Mode
 Time Forbidden Mode
 Private Mode (Requires compatible mortise lock)
 Time Private Mode (Requires compatible mortise lock)
 Safe Mode
 Time Safe Mode

Supported Systems:
 All Software Systems

Special Features:
 Wireless Upgrade and Maintenance

Technical Parameters

- Door Thickness: 35-180mm
- Spindle available: Standard 8mm (8.5mm, 9mm optional)
- Low Voltage Alert: Low battery alarm, allows up to 100 openings after alarm
- Communication Range: Bluetooth < 10m, RFID card < 2cm
- Power Supply: 3 alkaline batteries, up to 20,000 openings or a 2-year lifespan (depending on usage)
- User Capacity: 1,500 users
- Handle Depression: Free-spinning when locked, with a maximum angle of 65°
- Event Logs: Stores the latest 500 events
- Temperature: -25°C ~ +65°C
- Humidity: 20% ~ 93%

Lock Structure Options

- Handle Shape: Type A, Type B
- Surface Finish: Stainless steel, PVD
- Reader Color: Black, White

Optional Features

- Optional Sensors: Door lock status sensor, handle status sensor
- Optional Accessories: Waterproof gasket, base plate
- Optional pincode panel for password authentication opening.
- Optional smart gateway for real-time lock networking.

Suitable for indoor locks where the handle and escutcheon plate are separate



Widely Applicable

Suitable for a variety of door varieties to choose from, such as different contours, colors and lengths. Highly integrated lock plugs provide maximum flexibility.



Easy to Install

Just use the intelligent lock to replace the mechanical lock core, free wiring, free opening, can complete the installation in a few minutes.



Simple Design

Hyperbolid modern minimalist design, the overall beauty of the product is high, suitable for the simple interior door with the lock core handle separation.



Easy to Maintain

Easy battery replacement, with a variety of sensors, quickly locate product problems, while supporting product code upgrade.



High Reliability

Simple modular design, idling free handle design and high strength durability design.



Authentication Test:

- CE certification
- RoHS certification
- FCC Certification
- 96 hours salt spray test
- IP52
- 300,000 full cycle life tests

E-Relay



The EVOXS E-Relay series consist of an access reader and a controller used in combination. The relay output is used to control magnetic locks and electric locks. It can be used for main entrances, floor corridors, parking lots, and elevator control where independent smart locks cannot be installed. It supports both online and offline use. Real-time monitoring of door status is possible through the controller's sensor interface.

The EVOXS E-Relay series products include split-type offline access control, all-in-one access control, and more, providing comprehensive application solutions for different customers.

Product Features

- Processed with AES256 encryption, providing a high level of security.
- Supports mainstream door opening methods such as RF cards, passwords, NFC, and mobile Bluetooth.
- Flexible configuration of various management functions based on different management systems.
- Enables full lifecycle management including installation, setup, and maintenance via mobile phone.
- Supports unified management systems for online authorization and virtual network authorization applications.

The communication between the Peripheral Device and the lock is encrypted and protected.



Supported Modes:

Standard Mode
Auto Opening Mode
Toggle Mode
Time Toggle Mode
Time Forbidden Mode
Safe Mode
Time Safe Mode

Supported Systems:

All Software Systems

Special Features:

Wireless Upgrade and Maintenance

Technical Parameters

- Installation Options: Surface mount
- Connection Distance: Distance between wall-mounted reader and control unit is 100m
- Communication Distance: Bluetooth < 10m; RFID card < 2cm
- Power Supply: 12V external power supply
- Relay: 24V 1.5A DC
- User Capacity: 1,500 users
- Event Logs: Stores the latest 500 events
- Temperature: -10°C ~ +55°C
- Humidity: 20% ~ 93%

Optional Features

- Optional RFID reader or multi-function reader.
- Optional offline controller and online controller.
- Optional special application controller and general application controller.

Suitable for sliding doors, public areas at building entrances, elevators, and garage doors



Narrow panel reader is designed to fit perfectly in any environment.



Visual and acoustic status and function indicators.



In a variety of management platform system to provide a choice.



Wall readers are suitable for the most severe weather conditions.




The transmission of control unit and data reader adopts encryption security.



Authentication Test:

- CE certification
- RoHS certification

E-Seperate

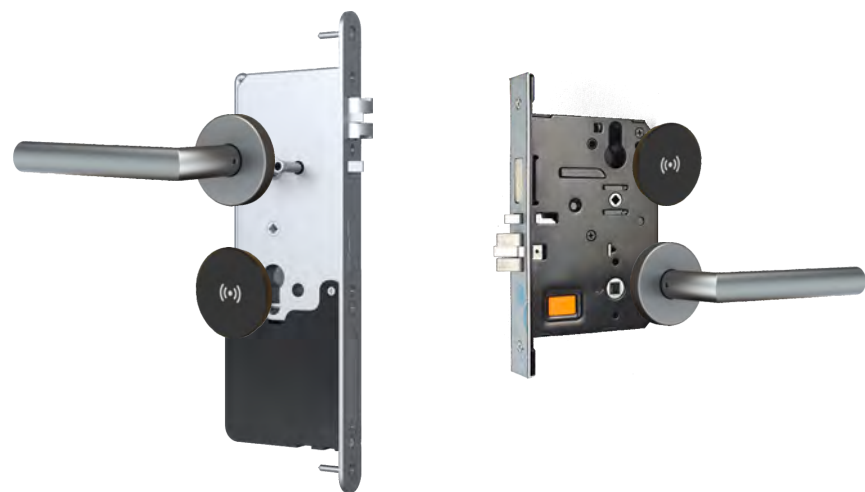

The EVOXS E-Seperate combined with an independent power supply battery box, provides an integrated, high-performance access security solution for various door types. To meet diverse installation environments, door structures, and aesthetic requirements, it features a modular design with a minimalist appearance. The product is highly integrated, offers strong security, and allows for flexible wiring and installation, gaining high recognition in the market.

The EVOXS E-Seperate series includes Euro profile and ANSI profile locks, which are compatible with mainstream door thicknesses and opening directions. Combined with a flexibly positioned independent battery box, it provides a stable and reliable door lock upgrade solution for commercial users.

Product Features

- Processed with AES256 encryption, providing a high level of security.
- Compatible with Euro profile and ANSI profile mortise lock.
- Stainless steel handles feature a passivated finish, making them suitable for various environments.
- Flexible configuration of various management functions based on different management systems.
- Enables full lifecycle management including installation, setup, and maintenance via mobile phone.
- Supports unified management systems for online authorization and virtual network authorization applications.
- Supports mainstream door opening methods such as RF cards, passwords, NFC, and mobile Bluetooth.
- Features a concealed structural design along with multiple sensors for convenient application management.
- Supports emergency opening via a concealed mechanical cylinder.

The communication between the Peripheral Device and the lock is encrypted and protected.



Supported Modes:
 Standard Mode
 Auto Opening Mode
 Toggle Mode
 Time Toggle Mode
 Time Forbidden Mode
 Private Mode (Requires compatible mortise lock)
 Time Private Mode (Requires compatible mortise lock)
 Safe Mode
 Time Safe Mode

Supported Systems:
 All Software Systems

Special Features:
 Wireless Upgrade and Maintenance

Technical Parameters

- Door Thickness: 35-180mm
- Low Voltage Alert: Low battery alarm, allows up to 100 openings after alarm
- Communication Range: Bluetooth < 10m, RFID card < 2cm
- Power Supply: 4 alkaline batteries, up to 20,000 openings or a 2-year lifespan (depending on usage)
- User Capacity: 2,000 permissions within the lock
- Handle Press: Maximum 65°
- Event Log: Stores the last 500 events
- Temperature: External panel supports -20°C ~ +60°C; Internal panel supports 0°C ~ +60°C
- Humidity: 0% ~ 95%

Lock Structure Options

- Handle Shape: Type A, Type B
- Surface Treatment: Stainless steel, PVD
- Reader Color: Black, White
- Spindle Compatibility: Standard 8mm square spindle
- Optional Lock Body: European standard, American standard

Optional Features

- Optional door lock status, door status, and anti-privacy sensors.
- Optional smart gateway for real-time networking of locks.

Suitable for interior doors, such as those in hotels or commercial buildings



Widely Applicable

Suitable for a variety of door varieties to choose from, such as different contours, colors and lengths. Highly integrated lock plugs provide maximum flexibility.



Easy to Install

Just use the intelligent lock to replace the mechanical lock core, free wiring, free opening, can complete the installation in a few minutes.



Simple Design

Hyperbolid modern minimalist design, the overall beauty of the product is high, suitable for the simple interior door with the lock core handle separation.




Easy to Maintain

Easy battery replacement, with a variety of sensors, quickly locate product problems, while supporting product code upgrade.



High Reliability

Simple modular design, idling free handle design and high strength durability design.

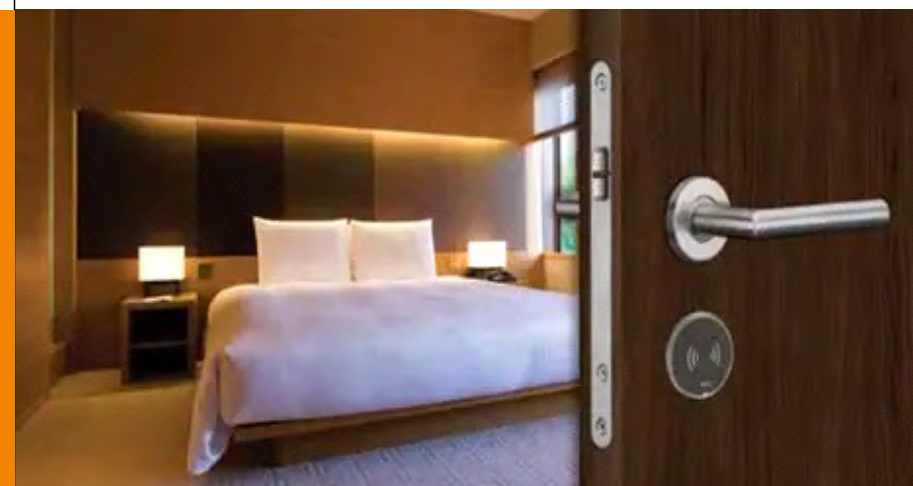

Authentication Test:

- CE Certification
- RoHS Certification.
- 96 hours salt spray test(optional 240 hours)
- IP54
- 300,000 full cycle life test

E-Furniture



EVOXS E-Furniture is a battery-powered electronic locker lock that supports access via RFID cards, key fobs, or stickers. Its minimalist design allows for a quick upgrade from mechanical cylinders to digital management.

EVOXS E-Furniture features a robust, anti-pry, and anti-collision structure designed for high-frequency public use. It helps build an integrated security solution covering "Access-Storage-Exclusive Areas" for gyms, pools, and offices.

Product Features

- Processed with AES256 encryption, providing a high level of security.
- Utilizes latch locking and can be installed on wooden, plastic-steel, or metal cabinet doors.
- Convenient hole-drilling surface mount application, supporting both vertical and horizontal installation orientations.
- Flexible configuration of various management functions based on different management systems.
- Enables full lifecycle management including installation, setup, and maintenance via mobile phone.
- Supports unified management systems for online authorization and virtual network authorization applications.
- Supports Bluetooth, RF card, and other opening methods.
- Supports emergency opening via a concealed mechanical cylinder.
- Turn on/off audio and visual alerts.
- Suitable for indoor storage environments.



Widely Applicable

Suitable for a variety of door varieties to choose from, such as different contours, colors and lengths. Highly integrated lock plugs provide maximum flexibility.



Easy to Install

Just use the intelligent lock to replace the mechanical cylinder NO. wiring, no drilling can complete the installation in a few minutes.



Easy Maintenance

No need to remove the lock, remove the KNOB can quickly replace the battery, and support electronic key emergency door opening.



High Reliability

Simple modular design, idling free handle design and high strength durability design.

The communication between the Peripheral Device and the lock is encrypted and protected.



Supported Modes:
Standard Mode
Auto Opening Mode
Toggle Mode
Time Toggle Mode
Safe Mode
Time Safe Mode

Supported Systems:
All Software Systems

Special Features:
Wireless Upgrade and Maintenance

Technical Parameters

- Power Supply: CR2450 battery; lasts approx. 6 months (depending on usage)
- Emergency Access: Type-C emergency power supply
- Door Thickness: 1-30mm
- Surface Color: White reader, grey buttons
- User Capacity: Up to 2,000 authorized users stored in the lock
- Event Log: Stores the last 500 events
- Bluetooth Range: Less than 10m
- RFID Reading Distance: Less than 1cm
- Temperature: -20°C ~ +55°C
- Humidity: 20% ~ 80%

Optional Features

- Optional smart gateway to achieve real-time networking of locks.

Suitable for drawers, lockers, and other use cases in environments such as gyms, swimming pools, and office areas



Authentication Test:

- CE Certification
- RoHS Certification
- IP42