


Lexmark CX410 Series Multifunction Color Laser Printer



	Swivel Cabinet Adjustable Printe	r Stand Color Op to 32 ppm 4	3-in. Touch Screen Solutions
Product specifications	Lexmark CX410e	Lexmark CX410de	Lexmark CX410dte
Printing			
Function	Color Scanning, Color Printing, Color Faxing, Color Copying		
Display	Lexmark e-Task 4.3-inch (10.9 cm) color touch screen		
Print Speed: Up to ⁴	Black: 32 ppm / Color: 32 ppm		
Time to First Page: As fast as	Black: 10.5 seconds / Color: 11.5 seconds		
Print Resolution	Black: 4800 Color Quality (2400 x 600 dpi), 1200 x 1200 dpi / Color: 4800 Color Quality (2400 x 600 dpi), 1200 x 1200 dpi		
Memory / Processor	Standard: 512 MB / Maximum: 2560 MB / Processor: Dual Core, 800 MHz		
Hard Disk	Not Available		
Recommended Monthly Page Volume ²	800 - 6000 pages		
Maximum Monthly Duty Cycle: Up to ³	75000 pages per month		
Copying			
Copy Speed: Up to ⁴		Black: 32 cpm / Color: 32 cpm	
Time to First Copy: As fast as	Black: 10.8 seconds / Color: 11.6 seconds		
Color Scanning			
Scanner Type / ADF Scan	Flatbed scanner with ADF / RADF (Reversing Duplex) / 50 pages 20 lb or 75 gsm bond		
Duplex Scan Speed: Up to	A4/Ltr, Black: 13 / 14 sides per minute - A4/Ltr, Color: 13 / 14 sides per minute		
Simplex Scan Speed: Up to	A4/Ltr, Black: 30 / 32 sides per minute - A4/Ltr, Color: 30 / 32 sides per minute		
Optical Scanning Resolution	1200 X 600 ppi (black), 600 X 600 ppi (color)		
Faxing		The second secon	
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps		
Supplies ⁵		Tro floo, the rival Buplex, dele rispo	
Laser Cartridge Yields	4,000¹-page Black High Yield Cartridge, 3,000¹-page Color (CMY) High Yield Cartridges, 2,500¹-page Black Cartridge, 2,000¹-page Color (CMY) Cartridges, 1,000¹-page Black and Color (CMYK) Cartridges		
Cartridge(s) Shipping with Product	1,400¹-page Black and Color (CMYK) Starter Return Program Toner Cartridges		
Paper Handling		, ,	<u>_</u>
Included Paper Handling	Single-Sheet Manual Feed, 250-Sheet Input, 150-Sheet Output Bin	Single-Sheet Manual Feed, 250-Sheet Input, 150-Sheet Output Bin, Integrated Duplex	Single-Sheet Manual Feed, 550-Sheet Duo Tray with 100-Sheet Feeder, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input
Optional Paper Handling	550-Sheet Duo Tray with 100-Sheet Feeder, 550-Sheet Tray	550-Sheet Duo Tray with 100-Sheet Feeder, 550-Sheet Tray	550-Sheet Tray
Paper Input Capacity: Up to	Standard: 250+1 pages 20 lb or 75 gsm bond / Maximum: 1450+1 pages 20 lb or 75 gsm bond	Standard: 250+1 pages 20 lb or 75 gsm bond / Maximum: 1450+1 pages 20 lb or 75 gsm bond	Standard: 900+1 pages 20 lb or 75 gsm bond / Maximum: 1450+1 pages 20 lb or 75 gsm bond
Paper Output Capacity: Up to	Standard: 150 pages 20 lb or 75 gsm bond / Maximum: 150 pages 20 lb or 75 gsm bond		
Media Types Supported	Refer to the Card Stock & Label Guide, Paper Labels, Card Stock, Transparencies, Plain Paper	Refer to the Card Stock & Label Guide, Paper Labels, Card Stock, Transparencies, Plain Paper	Refer to the Card Stock & Label Guide, Paper Labels, Envelopes, Card Stock, Transparencies, Plain Paper
Media Sizes Supported	Oficio, Universal, Letter, Legal, A5, A4, Executive, Folio, JIS-B5	Oficio, Universal, Letter, Legal, A5, A4, Executive, Folio, JIS-B5	A6, Oficio, Universal, Statement, Folio, DL Envelope, B5 Envelope, A4, 7 3/4 Envelope, 10 Envelope, 9 Envelope, A5, C5 Envelope, Executive, JIS-B5, Legal, Letter
General ⁷			-
Standard Ports	Front USB 2.0 Specification Hi-Speed Certified Port (Type A), USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000)		
Optional Network Ports / Optional Local Ports	MarkNet N8352 802.11b/g/n Wireless		
Noise Level, Operating	Printing; 49 dBA / Copy; 50 dBA / Scan: 50 dBA		
Product Warranty	1-Year Onsite Service, Next Business Day		
Size (in H x W x D) / Weight (lb.)	18.44 x 17.48 x 21.99 in. / 60.25 lb.	18.44 x 17.48 x 21.99 in. / 60.25 lb.	23.63 x 17.48 x 21.99 in. / 69.55 lb.

¹ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. ² "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ³ "Recommended Monthly Page Volume" is a range of pages ustand helps customers evaluate Lexmark's product offerings based on the average number of pages are producted pages and the production of pages ustand the page of pages ustand the production of pages ustand the page of pages ustand the production of pages ustand the production of pages are producted in a constance with ISO/IEC 24734, excludes first set of test documents. For more information see: www.lexmark.com/isospoeds. ⁵ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁶ For more information on Lexmark Mobile Solutions see: http://www.lexmark.com/isospoeds. ⁸ Product functions of the page of pages used to page the page of pages used to the page of pages and the page of pages used to the page of pages

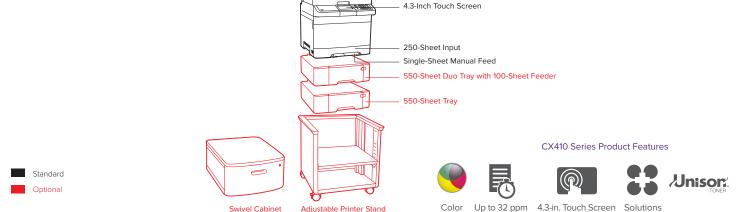

