


## **Lexmark CS310 Series Color Laser Printer**



Product specifications	Lexmark CS310n	Lexmark CS310dn
Printing		
Display	16 character, 2-line backlit All Points Addressable (APA) LCD Display	
Print Speed: Up to <sup>4</sup>	Black: 25 ppm / Color: 25 ppm	
Time to First Page: As fast as	Black: 10 seconds / Color: 11 seconds	
Print Resolution	Black: 4800 Color Quality (2400 x 600 dpi), 1200 x 1200 dpi / Color: 4800 Color Quality (2400 x 600 dpi), 1200 x 1200 dpi	
Memory / Processor	Standard: 256 MB / Maximum: 2304 MB / Processor: Dual Core, 800 MHz	
Hard Disk	Not Available	
Recommended Monthly Page Volume <sup>2</sup>	500 - 5000 pages	
Maximum Monthly Duty Cycle: Up to <sup>3</sup>	60000 pages per month	
Supplies <sup>5</sup>		
Laser Cartridge Yields	4,000¹-page Black High Yield Cartridge, 3,000¹-page Color (CMY) High Yield Cartridges, 1,000¹-page Black and Color (CMYK) Cartridges	
Cartridge(s) Shipping with Product	750¹-page Black and Color (CMYK) Starter Return Program Toner Cartridges	1,400¹-page Black and Color (CMYK) Starter Return Program Toner Cartridges
Paper Handling		
Included Paper Handling	Single-Sheet Manual Feed, 250-Sheet Input, 125-Sheet Output Bin	Single-Sheet Manual Feed, 250-Sheet Input, 125-Sheet Output Bin, Integrated Duplex
Optional Paper Handling	550-Sheet Duo Tray with 100-Sheet Feeder	
Paper Input Capacity: Up to	Standard: 250+1 pages 20 lb or 75 gsm bond / Maximum: 900+1 pages 20 lb or 75 gsm bond	
Paper Output Capacity: Up to	Standard: 125 pages 20 lb or 75 gsm bond / Maximum: 125 pages 20 lb or 75 gsm bond	
Media Types Supported	Refer to the Card Stock & Label Guide, Paper Labels, Card Stock, Transparencies, Plain Paper	
Media Sizes Supported	Oficio, Universal, Letter, Legal, A5, A4, Executive, Folio, JIS-B5	
General <sup>7</sup>		
Standard Ports	Ethernet 10/100BaseTX (RJ-45), also works with 1000Base-T, USB 2.0 Specification Hi-Speed Certified (Type B)	
Optional Network Ports / Optional Local Ports	MarkNet N8352 802.11b/g/n Wireless	MarkNet N8352 802.11b/g/n Wireless, External MarkNet™ N7020e Gigabit Ethernet
Noise Level, Operating	Printing: 48 dBA	
Product Warranty	1-Year Exchange Service, Next Business Day	
Size (in H x W x D) / Weight (lb.)	11.5 x 17.4 x 16.0 in. / 44.3 lb.	11.5 x 17.4 x 16.0 in. / 44.8 lb.

<sup>&</sup>lt;sup>1</sup> Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. <sup>2</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>3</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>4</sup> Print and copy speeds measured in accordance with ISO/IEC 24734, excludes first set of test documents. For more information see: www.lexmark.com/ISOspeeds. <sup>5</sup> Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. <sup>6</sup> For more information on Lexmark Mobile Solutions see: http://wwwt.lexmark.com/egions for more details. <sup>6</sup> For more information on Lexmark Mobile Solutions see: http://wwwt.lexmark.com/egions for more details. <sup>6</sup> Por more information on Lexmark Mobile Solutions see: http://wwwt.lexmark.com/egions for more details. <sup>6</sup> Por more information on Lexmark Mobile Solutions see: http://wwwt.lexmark.com/printerlicense for details. <sup>6</sup> Puplex (2-sided printing) models are ENERGY STAR compliant.

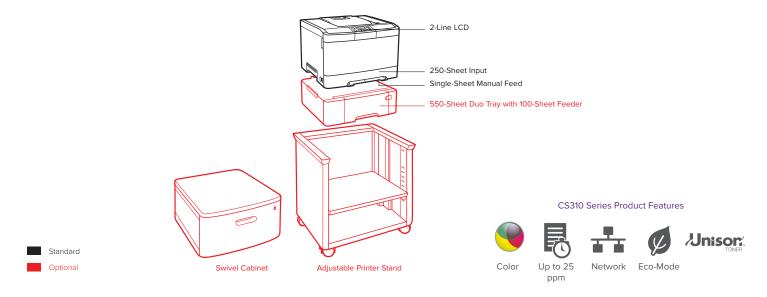

