Lexmark C748 Family Product specifications

4.3-inch Touch Screen

550-Sheet Drawer
550-Sheet Drawer
550-Sheet Drawer

550-Sheet Drawer

2,000-Sheet High-Capacity Feeder

Caster Base

Caster Base
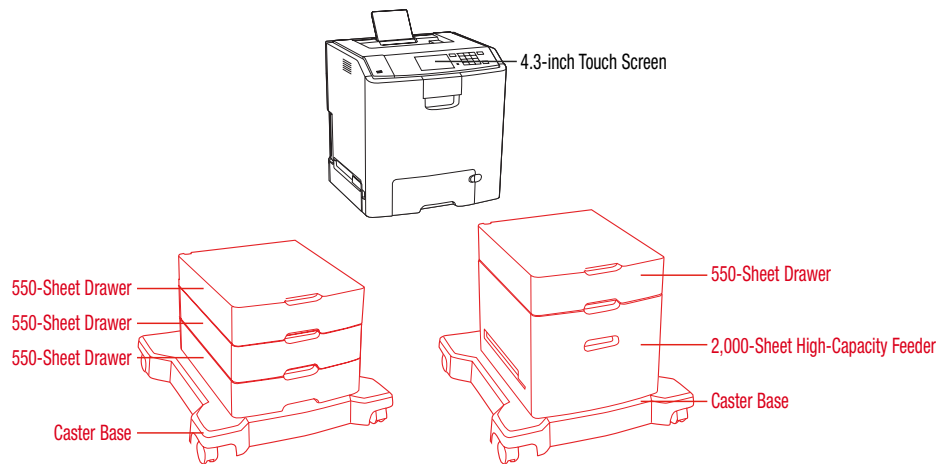
■ Standard
■ Optional

Product specifications	Lexmark C748e	Lexmark C748de	Lexmark C748dte
Printing			
Display	Lexmark e-Task 4.3-inch (10.9 cm) color touch screen with audible feedback		
Print Speed: Up to	Black: 35 ppm / Color: 35 ppm		
Time to First Page: As fast as	Black: 9 seconds / Color: 9 seconds		
Print Resolution, Color	1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi)		
Processor	800 MHz		
Memory	Standard: 512 MB / Maximum: 1536 MB		
Hard Disk	Option available		
Recommended Monthly Page Volume[4]	2,500 - 10,000 pages		
Maximum Monthly Duty Cycle: Up to[5]	100,000 pages per month		
Supplies			
Supplies Yield	10,000[1]-page color High Yield Toner Cartridges (CMY), 12,000[1]-page Black High Yield Toner Cartridge, 7,000[1]-page color (CMY) Toner Cartridges		
Cartridge(s) Shipping with Product	10,000[1]-page color (CMY) High Yield Return Program Toner Cartridges, 12,000[1]-page Black High Yield Return Program Toner Cartridge		
Paper Handling			
Paper Handling Standard	300-Sheet Output Bin, 100-Sheet Multipurpose Feeder, 550-Sheet Input Tray	300-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input Tray	300-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Drawer, 550-Sheet Input
Paper Handling Optional	550-Sheet Drawer, 2,000-Sheet High-Capacity Feeder, 550-Sheet Specialty Media Drawer		
Paper Input Capacity: Up to	Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4300 pages 20 lb or 75 gsm bond	Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4300 pages 20 lb or 75 gsm bond	Standard: 1200 pages 20 lb or 75 gsm bond / Maximum: 4300 pages 20 lb or 75 gsm bond
Paper Output Capacity: Up to	Standard: 300 pages 20 lb or 75 gsm bond / Maximum: 300 pages 20 lb or 75 gsm bond		
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Transparencies, Vinyl Labels, Refer to the Card Stock & Label Guide		
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, B5, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6		
General			
Standard Ports	USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified Port (Type A), Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45)		
Optional Network Ports	Internal MarkNet™ N8120 Gigabit Ethernet, Internal MarkNet™ N8250 802.11b/g/n Wireless		
Optional Local Ports	Internal RS-232C serial, Internal 1284-B Bidirectional Parallel		
Print Noise Level, Operating	55 dBA		
Product Warranty	1-Year Onsite Service, Next Business Day		
Energy Star	No	Yes	Yes
Specified Operating Environment	Temperature: 16 to 32°C (60 to 90°F), Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 Meters (10,000 Feet)		
Size (in. - H x W x D) / Weight (lb.)	17.9 x 17.1 x 15.7 in. / 56.4 lb.	17.9 x 17.1 x 15.7 in. / 56.4 lb.	22.9 x 17.1 x 21.5 in. / 66.4 lb.

AirPrint

LEXMARK™