


Lexmark MS610 Series Monochrome Laser Printer



MS610 Series Product Features

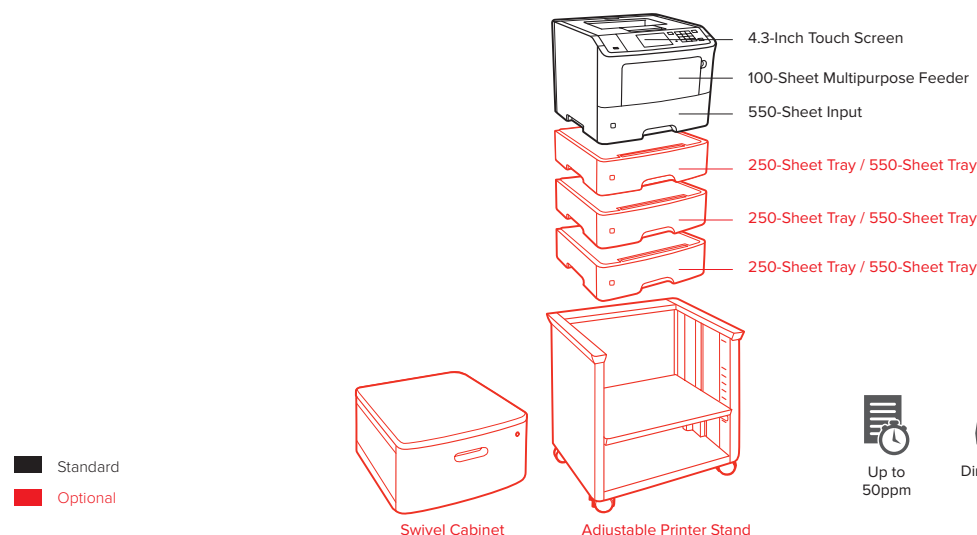

Product specifications	Lexmark MS610dn	Lexmark MS610de	Lexmark MS610dte
Printing			
Display	2.4-inch color LCD display	Lexmark e-Task 4.3-inch (10.9 cm) color touch screen	Lexmark e-Task 4.3-inch (10.9 cm) color touch screen
Print Speed: Up to ⁴		Black: 50 ppm	
Time to First Page: As fast as		Black: 6.5 seconds	
Print Resolution		Black: 600 x 600 dpi, 2400 Image Quality, 1200 Image Quality, 1200 x 1200 dpi	
Memory / Processor	Standard: 256 MB / Maximum: 1280 MB / Processor: Dual Core, 800 MHz	Standard: 512 MB / Maximum: 2560 MB / Processor: Dual Core, 800 MHz	Standard: 512 MB / Maximum: 2560 MB / Processor: Dual Core, 800 MHz
Hard Disk	Not Available	Option available	Option available
Recommended Monthly Page Volume ²		3000 - 16000 pages	
Maximum Monthly Duty Cycle: Up to ³	150000 pages per month	150000 pages per month	150000 pages per month
Supplies⁵			
Laser Cartridge Yields	20,000 ¹ -page Ultra High Yield Cartridge, 10,000 ¹ -page Extra High Yield Cartridge, 5,000 ¹ -page Black High Yield Cartridge, 1,500 ¹ -page Cartridge		
Cartridge(s) Shipping with Product	6,000 ¹ -page Starter Return Program Toner Cartridge		
Paper Handling			
Included Paper Handling	250-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input	250-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input	550-Sheet Tray, 250-Sheet Output Bin, 550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex
Optional Paper Handling	550-Sheet Tray, 250-Sheet Tray		
Paper Input Capacity: Up to	Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 2300 pages 20 lb or 75 gsm bond	Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 2300 pages 20 lb or 75 gsm bond	Standard: 1200 pages 20 lb or 75 gsm bond / Maximum: 2300 pages 20 lb or 75 gsm bond
Paper Output Capacity: Up to	Standard: 250 pages 20 lb or 75 gsm bond / Maximum: 250 pages 20 lb or 75 gsm bond		
Media Types Supported	Refer to the Card Stock & Label Guide, Plain Paper, Envelopes, Card Stock, Paper Labels, Transparencies		
Media Sizes Supported	A6, Oficio, Universal, Statement, Folio, DL Envelope, A4, 7 3/4 Envelope, 10 Envelope, 9 Envelope, A5, Executive, JIS-B5, Legal, Letter		
General			
Standard Ports	Front USB 2.0 Specification Hi-Speed Certified Port (Type A), USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000)	Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified Port (Type A)	Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified Port (Type A)
Optional Network Ports / Optional Local Ports	MarkNet N8352 802.11b/g/n Wireless	MarkNet N8352 802.11b/g/n Wireless / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial	MarkNet N8352 802.11b/g/n Wireless / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial
Noise Level, Operating	Printing: 55 dBA		
Product Warranty	1-Year Exchange Service, Next Business Day		
Size (in. - H x W x D) / Weight (lb.)	12.1 x 15.7 x 15.0 in. / 34.6 lb.	12.1 x 15.7 x 15.6 in. / 35.7 lb.	16.3 x 15.7 x 15.6 in. / 46.1 lb.

¹ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. ² "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ³ "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ⁴ Print and copy speeds measured in accordance with ISO/IEC 24734, excludes first set of test documents. For more information see: www.lexmark.com/ISOspeeds. ⁵ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁶ For more information on Lexmark Mobile Solutions see: http://www1.lexmark.com/en_US/solutions/business-solutions/mobile-print/index.shtml ⁷ Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁸ Duplex (2-sided printing) models are ENERGY STAR compliant.