




## Lexmark MS810 Series Monochrome Laser Printer



Staple Finisher

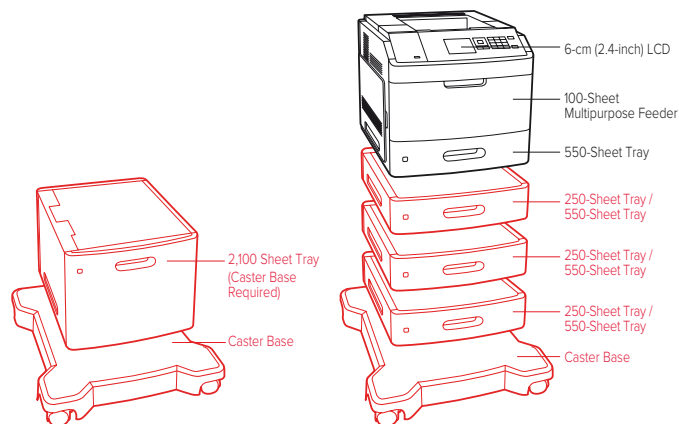

Staple, Hole Punch Finisher



High Capacity Output Expander



4-Bin Mailbox



Output Expander



MX6500e Multifunction Option

### MS810 Series Printer Features



Up to 55 ppm



Solutions



Finishing Function



Multiple Media Support



\*For supported maximum configurations, refer to the *Printer, Option and Stand Compatibility Guide* at [http://www.lexmark.com/publications/furniture\\_safety/](http://www.lexmark.com/publications/furniture_safety/)

### Product specifications

Product specifications		Lexmark MS810n	Lexmark MS810dn	Lexmark MS810de
Printing				
Display	2.4-inch color LCD display			Lexmark e-Task 4.3-inch (10.9 cm) color touch screen
Print Speed: Up to <sup>4</sup>	Black: 55 ppm			
Time to First Page: As fast as	Black: 4.8 seconds			
Print Resolution	Black: 600 x 600 dpi, 2400 Image Quality, 1200 Image Quality, 1200 x 1200 dpi			
Memory / Processor	Standard: 512 MB / Maximum: 2560 MB / Processor: Dual Core, 800 MHz			
Hard Disk	Option available			
Recommended Monthly Page Volume <sup>2</sup>	3000 - 20000 pages			
Maximum Monthly Duty Cycle: Up to <sup>3</sup>	250000 pages per month			
Supplies <sup>5</sup>				
Laser Cartridge Yields	25,000 <sup>1</sup> -page High Yield Cartridge, 6,000 <sup>1</sup> -page Cartridge			
Cartridge(s) Shipping with Product	10,000 <sup>1</sup> -page Starter Return Program Toner Cartridge			
Paper Handling				
Included Paper Handling	550-Sheet Output Bin, 100-Sheet Multipurpose Feeder, 550-Sheet Input		Integrated Duplex, 550-Sheet Output Bin, 100-Sheet Multipurpose Feeder, 550-Sheet Input	
Optional Paper Handling	Output Expander, 1500-Sheet High Capacity Output Expander, Staple Finisher, 4-Bin Mailbox, 250-Sheet Lockable Tray, 550-Sheet Tray, 250-Sheet Tray, 2100-Sheet Tray, 550-Sheet Lockable Tray, Staple and Hole Punch Finisher			
Paper Input Capacity: Up to	Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4400 pages 20 lb or 75 gsm bond			
Paper Output Capacity: Up to	Standard: 550 pages 20 lb or 75 gsm bond / Maximum: 2550 pages 20 lb or 75 gsm bond			
Media Types Supported	Refer to the Card Stock & Label Guide, Paper Labels, Integrated Labels, Dual Web Labels, Card Stock, Envelopes, Transparencies, Plain Paper			
Media Sizes Supported	A6, Oficio, Universal, Statement, Folio, DL Envelope, B5 Envelope, A4, 7 3/4 Envelope, 10 Envelope, 9 Envelope, A5, C5 Envelope, Executive, JIS-B5, Legal, Letter			
General				
Standard Ports	Front USB 2.0 Specification Hi-Speed Certified Port (Type A), One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000)			Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified Port (Type A)
Optional Network Ports / Optional Local Ports	Internal MarkNet N8350 802.11b/g/n Wireless / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial			
Noise Level, Operating	Printing: 57 dBA			
Product Warranty	1-Year Exchange Service, Next Business Day			
Size (in. - H x W x D) / Weight (lb.)	16.5 x 16.7 x 20.1 in. / 52.2 lb.		16.5 x 16.7 x 20.1 in. / 52.2 lb.	
			16.5 x 16.7 x 20.1 in. / 52.3 lb.	

<sup>1</sup> Average standard page yield value declared in accordance with ISO/IEC 19752. <sup>2</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>3</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>4</sup> Print and copy speeds measured in accordance with ISO/IEC 24734, excludes first set of test documents. For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds). <sup>5</sup> Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details. <sup>6</sup> For more information on Lexmark Mobile Solutions see: [http://www1.lexmark.com/en\\_US/solutions/business-solutions/mobile-print/index.shtml](http://www1.lexmark.com/en_US/solutions/business-solutions/mobile-print/index.shtml) <sup>7</sup> Duplex (2-sided printing) models are ENERGY STAR compliant.



Unison is a trademark of Lexmark International, Inc. Information in this document is subject to change without notice. ENERGY STAR® is a U.S. registered mark. All other trademarks are the property of their respective owners. Lexmark and Lexmark with the diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. AirPrint and the AirPrint logo are trademarks of Apple Inc.