




Lexmark MS811 and MS812 Series Monochrome Laser Printer

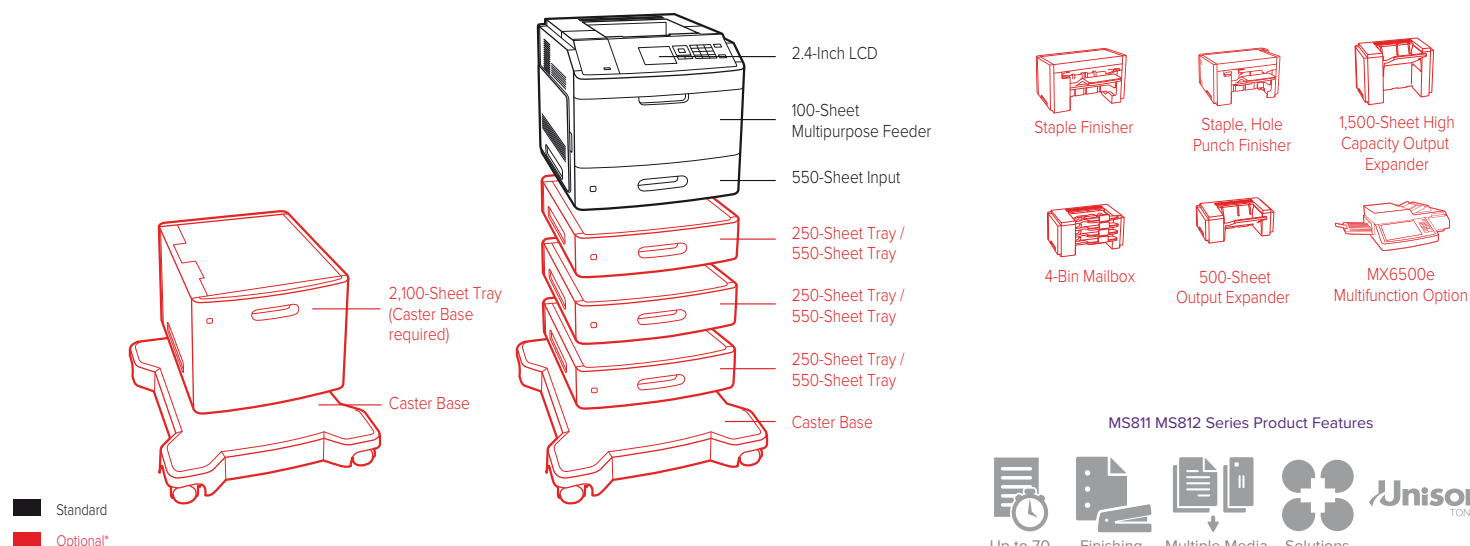

*For supported maximum configurations, refer to the *Printer, Option and Stand Compatibility Guide* at http://www.lexmark.com/publications/furniture_safety/

MS811 MS812 Series Product Features



Product specifications

| Product specifications | | Lexmark MS811dn | Lexmark MS812dn | Lexmark MS812de |
|--|--|--------------------|-----------------|--|
| Printing | | | | |
| Display | 2.4-inch color LCD display | | | Lexmark e-Task 7-inch (17.8 cm) color touch screen |
| Print Speed: Up to ⁴ | Black: 63 ppm | Black: 70 ppm | | Black: 70 ppm |
| Time to First Page: As fast as | Black: 4.4 seconds | Black: 4.0 seconds | | Black: 4.0 seconds |
| Print Resolution | Black: 600 x 600 dpi, 2400 Image Quality, 1200 Image Quality, 1200 x 1200 dpi | | | |
| Memory / Processor | Standard: 512 MB / Maximum: 2560 MB / Processor: Dual Core, 800 MHz | | | |
| Hard Disk | Option available | | | |
| Recommended Monthly Page Volume ² | 5000 - 30000 pages | 5000 - 50000 pages | | 300000 pages per month |
| Maximum Monthly Duty Cycle: Up to ³ | 275000 pages per month | | | |
| Supplies ⁵ | | | | |
| Laser Cartridge Yields | 45,000 ¹ -page Extra High Yield Cartridge, 25,000 ¹ -page High Yield Cartridge, 6,000 ¹ -page Cartridge | | | |
| Cartridge(s) Shipping with Product | 10,000 ¹ -page Starter Return Program Toner Cartridge | | | |
| Paper Handling | | | | |
| Included Paper Handling | Integrated Duplex, 550-Sheet Output Bin, 100-Sheet Multipurpose Feeder, 550-Sheet Input | | | |
| Optional Paper Handling | Output Expander, 1500-Sheet High Capacity Output Expander, Staple Finisher, 4-Bin Mailbox, 250-Sheet Lockable Tray, 550-Sheet Tray, 250-Sheet Tray, 2100-Sheet Tray, 550-Sheet Lockable Tray | | | |
| Paper Input Capacity: Up to | Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4400 pages 20 lb or 75 gsm bond | | | |
| Paper Output Capacity: Up to | Standard: 550 pages 20 lb or 75 gsm bond / Maximum: 2550 pages 20 lb or 75 gsm bond | | | |
| Media Types Supported | Refer to the Card Stock & Label Guide, Paper Labels, Integrated Labels, Dual Web Labels, Card Stock, Envelopes, Transparencies, Plain Paper | | | |
| Media Sizes Supported | A6, Oficio, Universal, Statement, Folio, DL Envelope, B5 Envelope, A4, 7 3/4 Envelope, 10 Envelope, 9 Envelope, A5, C5 Envelope, Executive, JIS-B5, Legal, Letter | | | |
| General | | | | |
| Standard Ports | Front USB 2.0 Specification Hi-Speed Certified Port (Type A), One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000) | | | Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified Port (Type A) |
| Optional Network Ports / Optional Local Ports | Internal MarkNet N8350 802.11b/g/n Wireless / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial | | | |
| Noise Level, Operating | Printing: 58 dBA | | | |
| Product Warranty | 1-Year Exchange Service, Next Business Day | | | |
| Size (in. - H x W x D) / Weight (lb.) | 16.5 x 16.7 x 20.1 in. / 52.2 lb. | | | 16.5 x 16.7 x 20.1 in. / 52.9 lb. |

¹ Average standard page yield value declared in accordance with ISO/IEC 19752. ² "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ³ "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ⁴ Print and copy speeds measured in accordance with ISO/IEC 24734, excludes first set of test documents. For more information see: www.lexmark.com/ISOspeeds. ⁵ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁶ For more information on Lexmark Mobile Solutions see: http://www1.lexmark.com/en_US/solutions/business-solutions/mobile-print/index.shtml



Unison is a trademark of Lexmark International, Inc. Information in this document is subject to change without notice. ENERGY STAR® is a U.S. registered mark. All other trademarks are the property of their respective owners. Lexmark and Lexmark with the diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. AirPrint and the AirPrint logo are trademarks of Apple Inc.