


FPV / 2700

Four identical pentagons. Four small corners. One braced PVC backing frame.

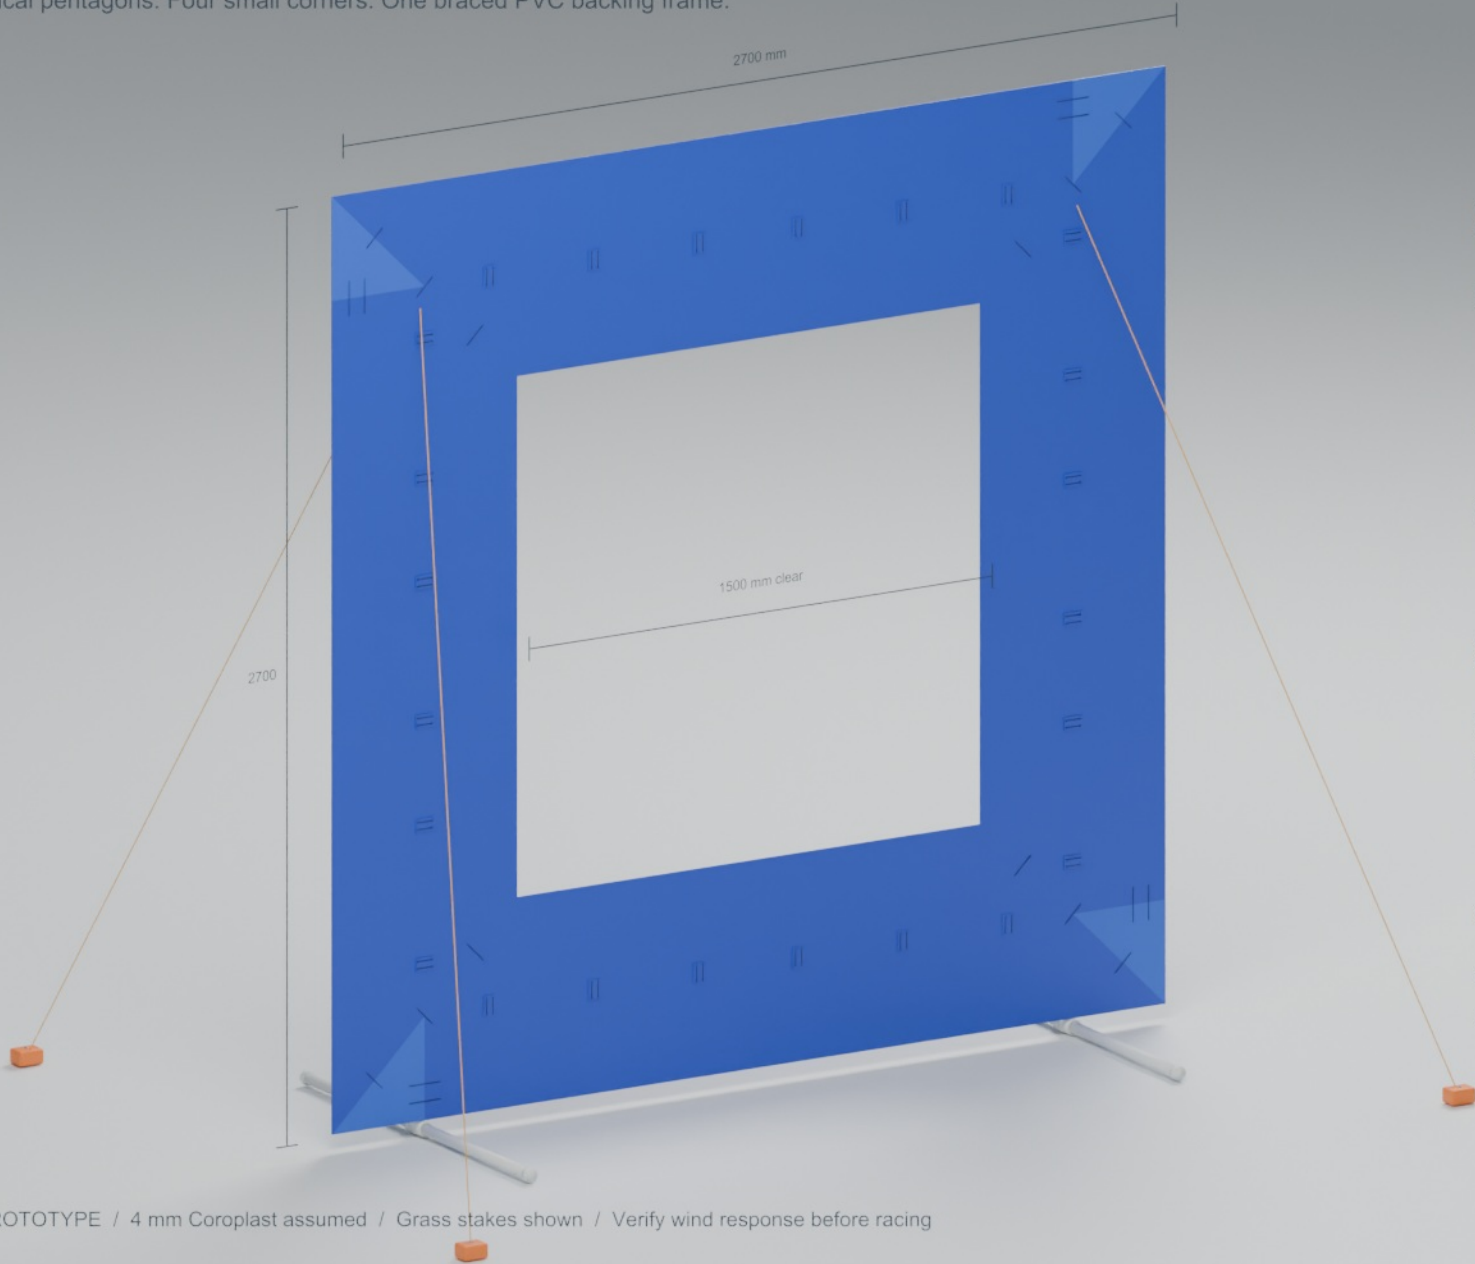

2700 x 2700

Face / 600 mm border

1500 x 1500

Clear opening / shallow backing

2 sheets per face


Shared corner sheet: 16 gates
One frame + four corner braces

Stake in both directions

Feet and anchors extend
beyond the shallow gate body.

The structure behind it

One 1 in backing frame, four 3/4 in braces and eight printed brace-end joints.

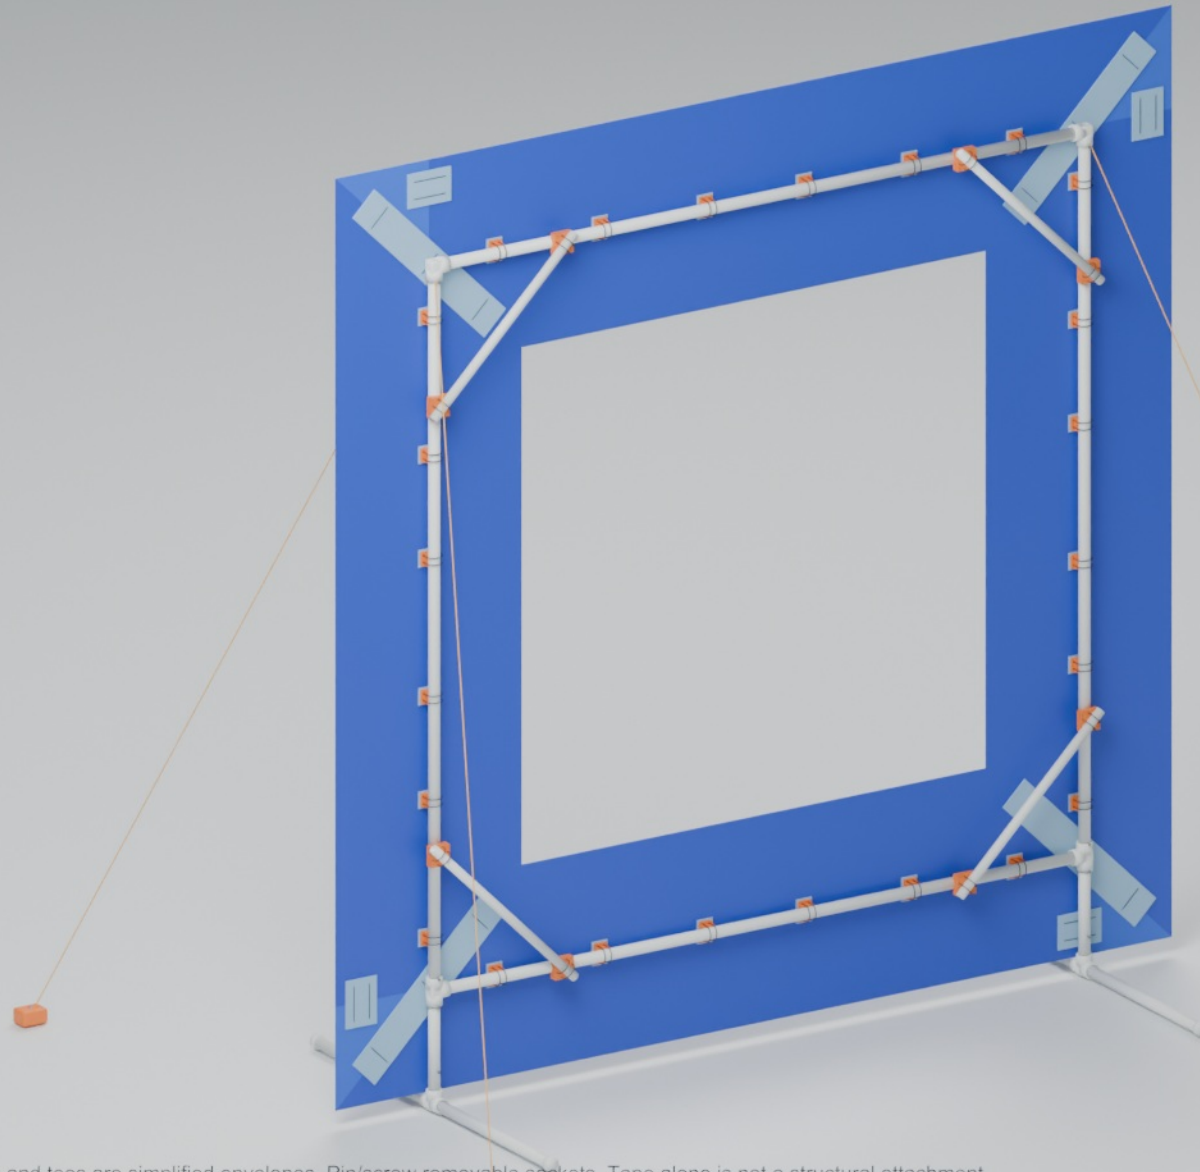

01 / MAIN FRAME

1 in Schedule 40 PVC
2100 x 2100 mm centerlines

02 / CORNER BRACES

3/4 in PVC / 4 x 646 mm
Printed 45-degree joints

03 / PRINTED JOINTS

Eight positive-angle connectors
Two tie pairs per connector


04 / BASE

1200 mm fore-aft pipe feet
Four anchors resist reversal

Purchased elbows and tees are simplified envelopes. Pin/screw removable sockets. Tape alone is not a structural attachment.

Assembly / layer by layer

Pentagons + corners -> scrap backers -> saddles -> one backing frame with corner braces

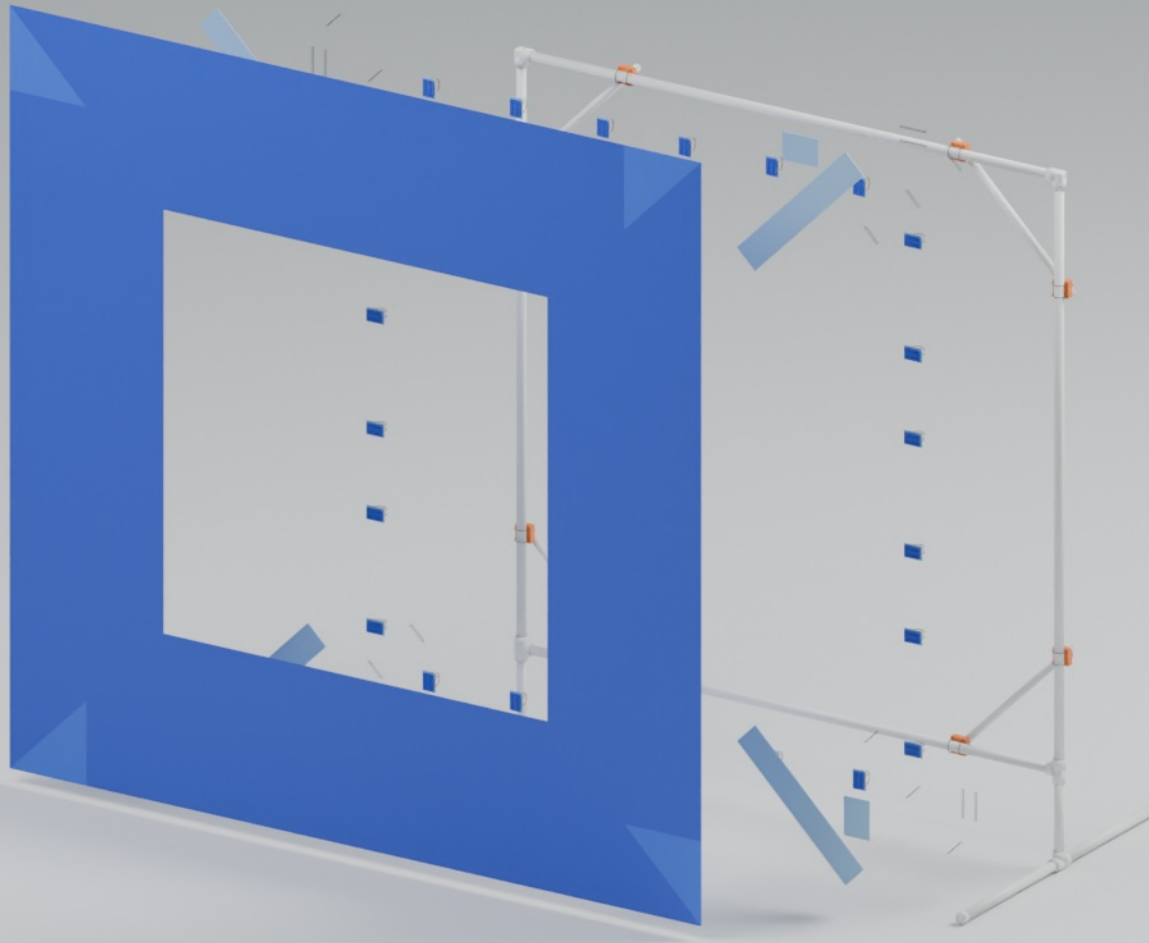

1 CUT + SPLICE

Four identical 2400 x 600 blanks
Four 300 mm corner triangles

2 BUILD THE FRAME

Standard tees and elbows
Add braces and broad feet

3 TIE ON THE FACE

24 saddles / two ties each
Use washers + scrap pads

4 STAND + ANCHOR

Fit the selected feet and guy lines

Exploded spacing is for instruction only. Body is about 94 mm thick; feet and guys extend beyond it.

Two identical cuts per sheet

Sheets 1 and 2 make four identical pentagons. Share sheet 3 across the fleet.

SHEET 01

1219.2 x 2438.4 mm



4 MAIN PANELS / GATE

2400 x 600 mm bounding blanks

SHEET 02

1219.2 x 2438.4 mm




BACKERS FROM OFFCUTS

4 diagonal strips + 4 short tabs

SHEET 03

1219.2 x 2438.4 mm

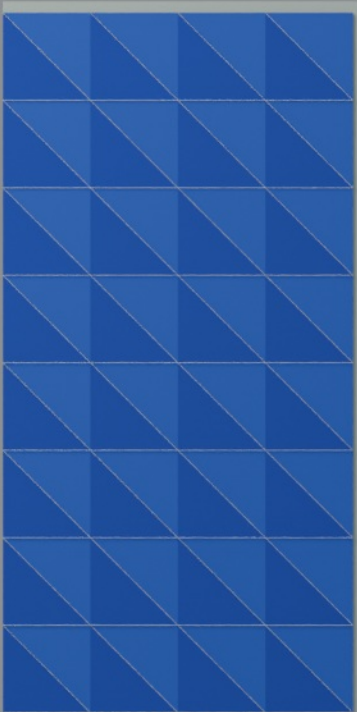

64 CORNERS / SHEET


300 mm right triangles = 16 gates

Knife cuts / no saw kerf. Face sheets: 2 per gate. Shared corner allocation: 1/16 sheet per gate. See SVG for backer nesting.

Tie-retained saddle


Two ties per attachment. Broad contact. No snap-fit dependency.

EXPLODED

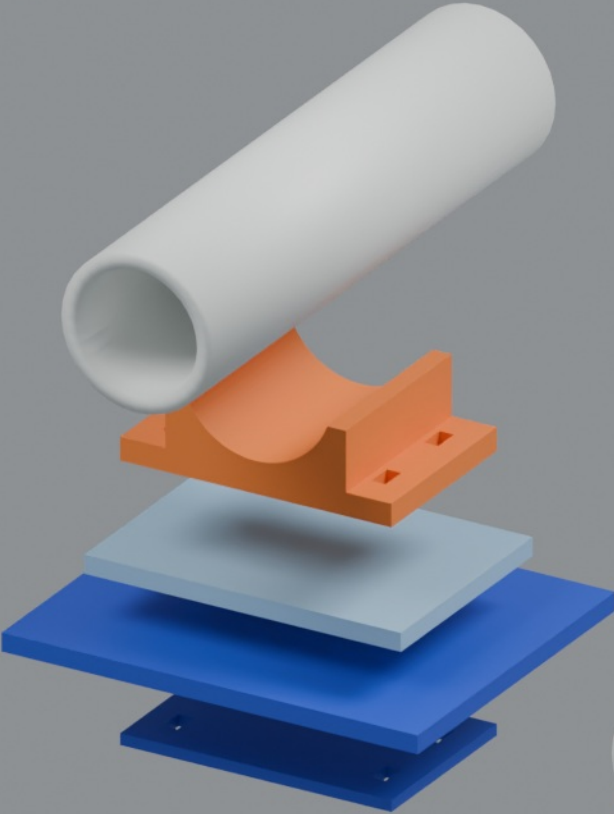


- 1 in PVC / OD 33.40 mm
- PETG saddle / 60 x 40 x 18
- 4 mm scrap pad + 4 mm face
- Front washer / 2.5 mm

ASSEMBLED

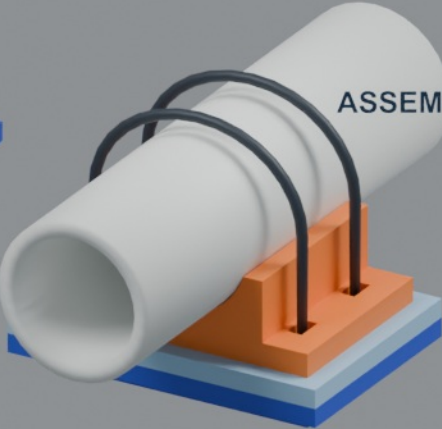

Dimensions / front elevation


All dimensions in millimetres. Clear opening: 1500 x 1500. Shallow single-frame construction.

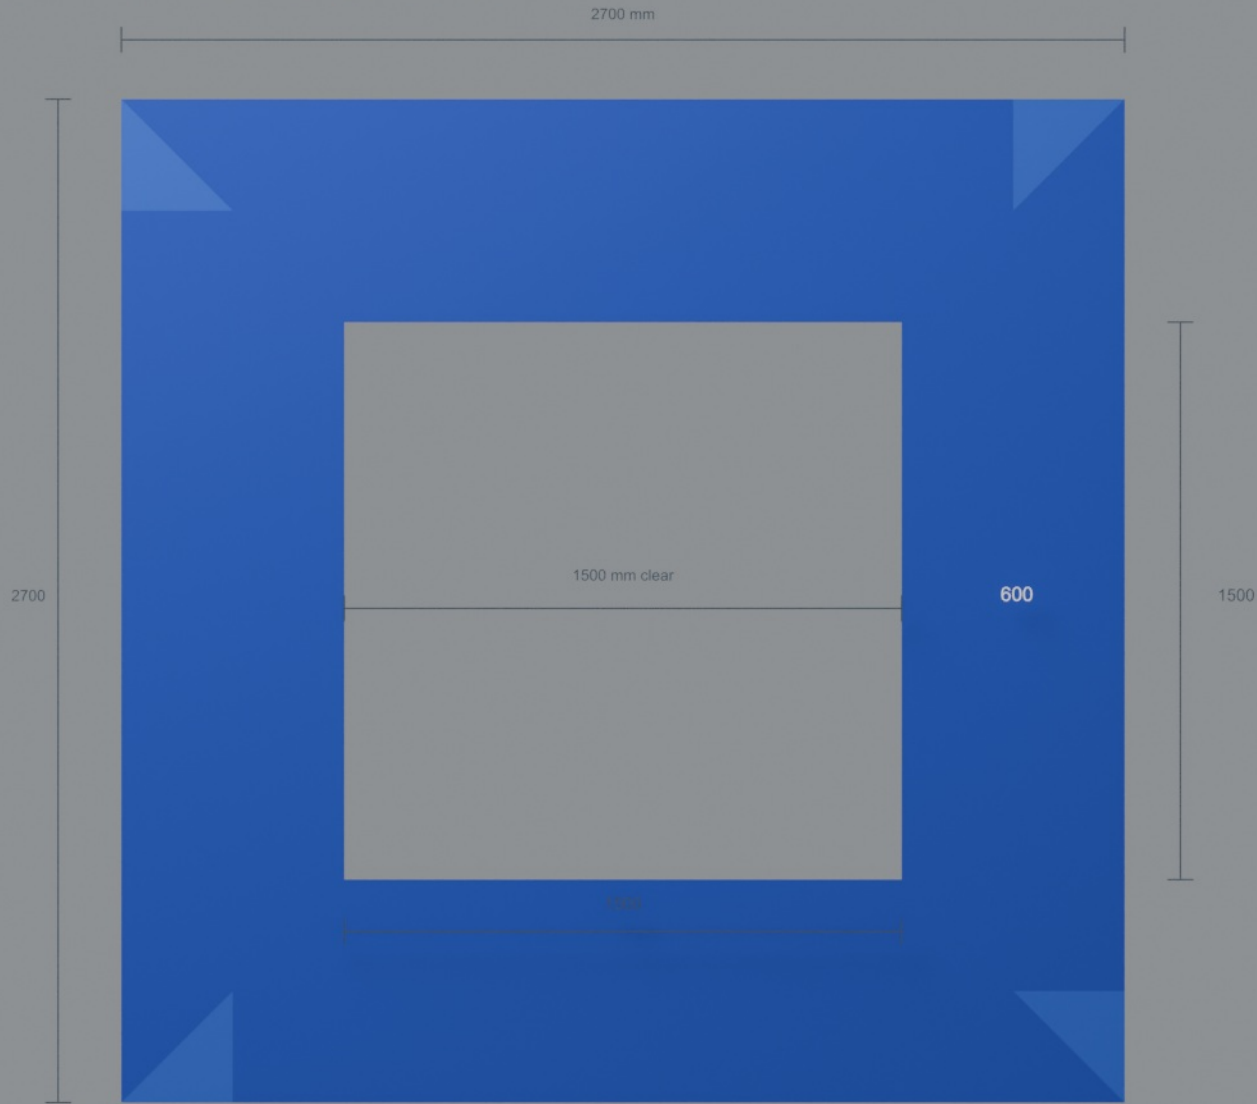

Face: x = -1350..1350, z = 0..2700. Opening: x = -750..750, z = 600..2100. Body thickness: about 94 mm including ties; excludes feet and guys.

Hard ground / contained base


Longer feet carry the guy anchors. Ballast is strapped to the feet, over anti-slip mats.

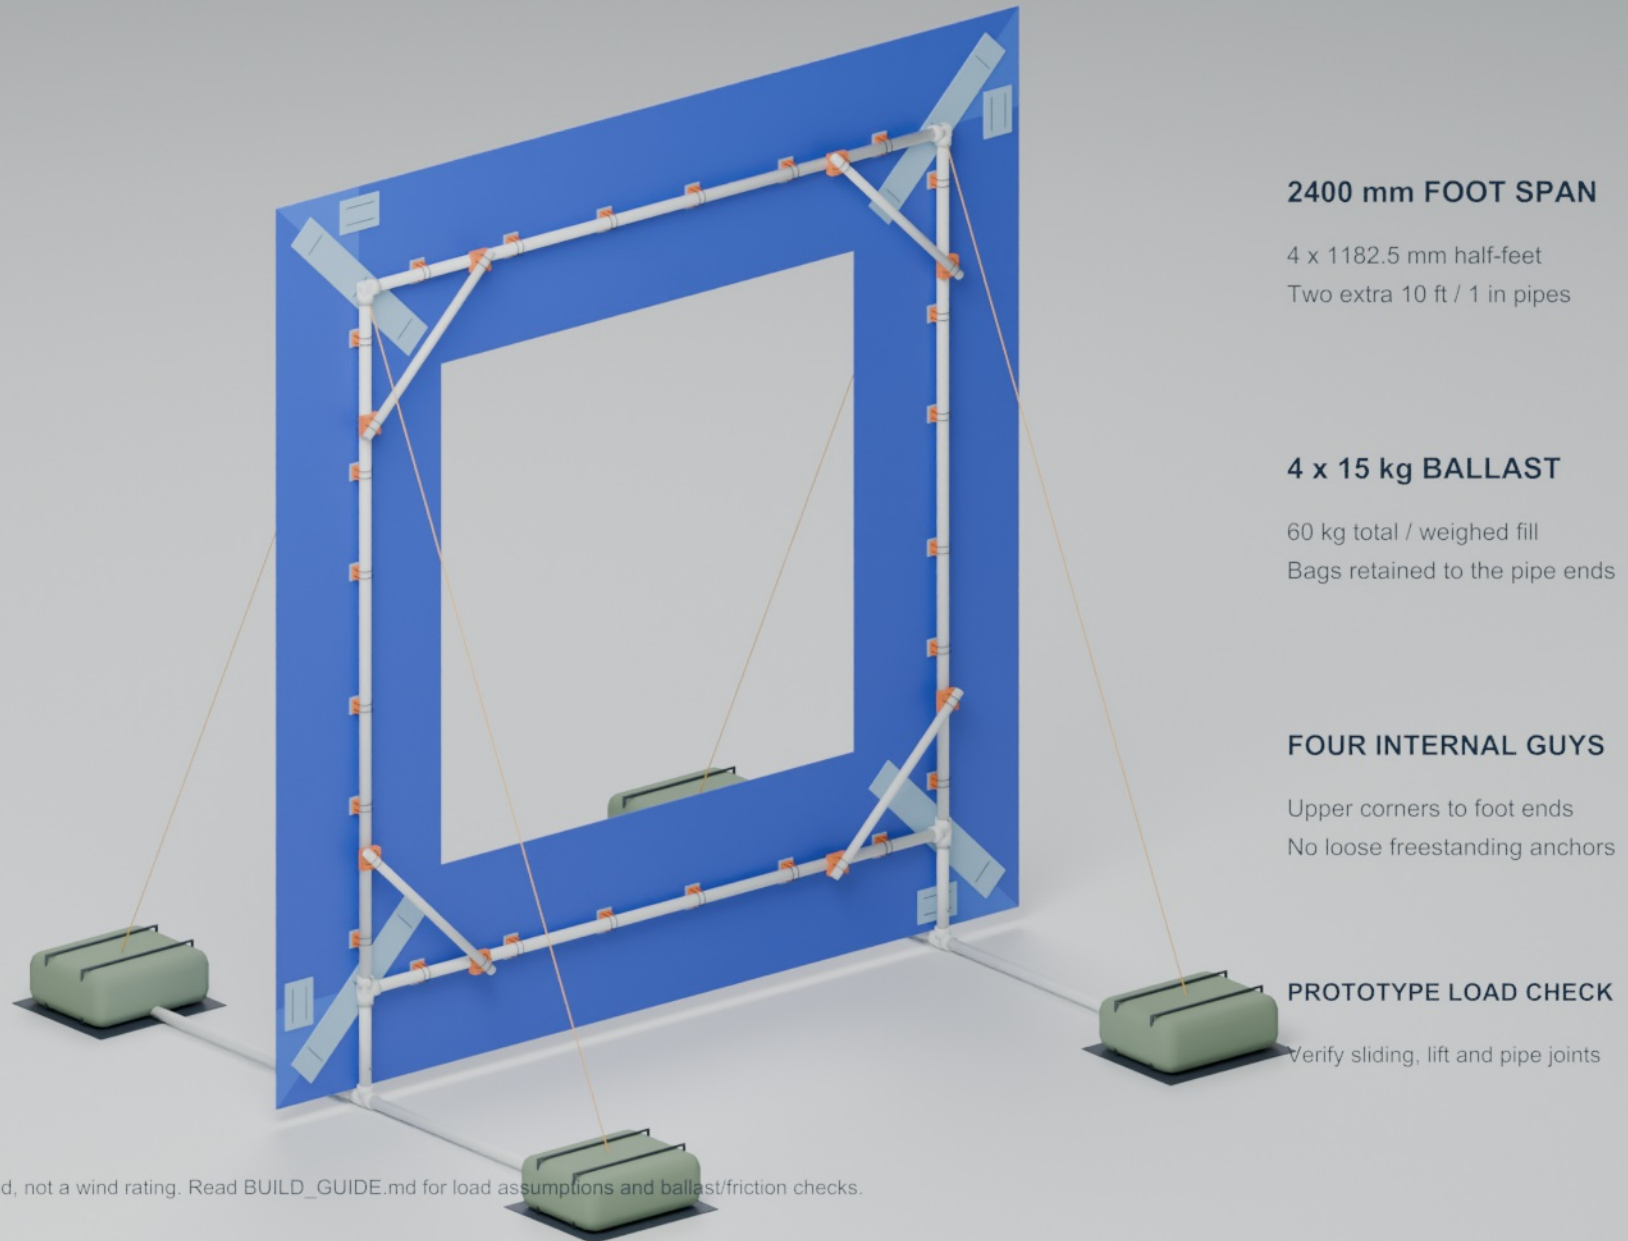

Baseline for testing in slight wind, not a wind rating. Read BUILD_GUIDE.md for load assumptions and ballast/friction checks.

A positive seat at both ends

Two modeled pipe cradles fix the crossing angle; four ties retain each printed joint.

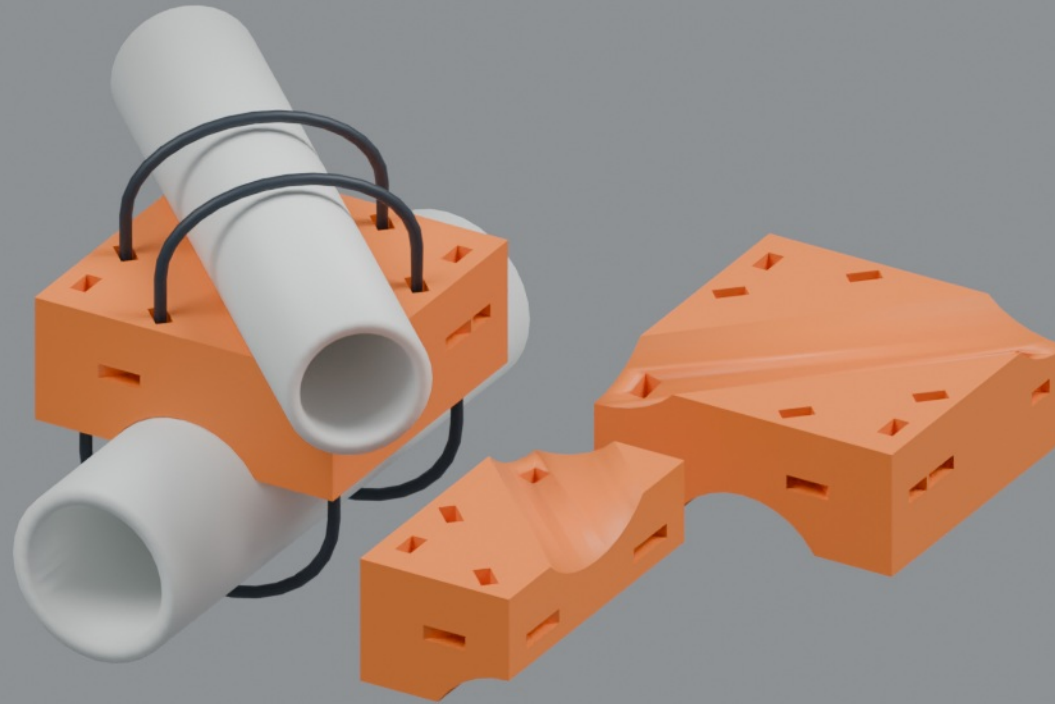

1 in main / OD 33.40

3/4 in brace / OD 26.67

8 JOINTS / GATE


4 x +45 and 4 x -45
60 x 60 x 24 mm body
Internal tie-return tunnels

TIE RETENTION

Two ties around each pipe
Print a fit sample first

Four pentagons. Four corners.

Identical border pieces rotate through 90 degrees. All long midspans stay continuous.

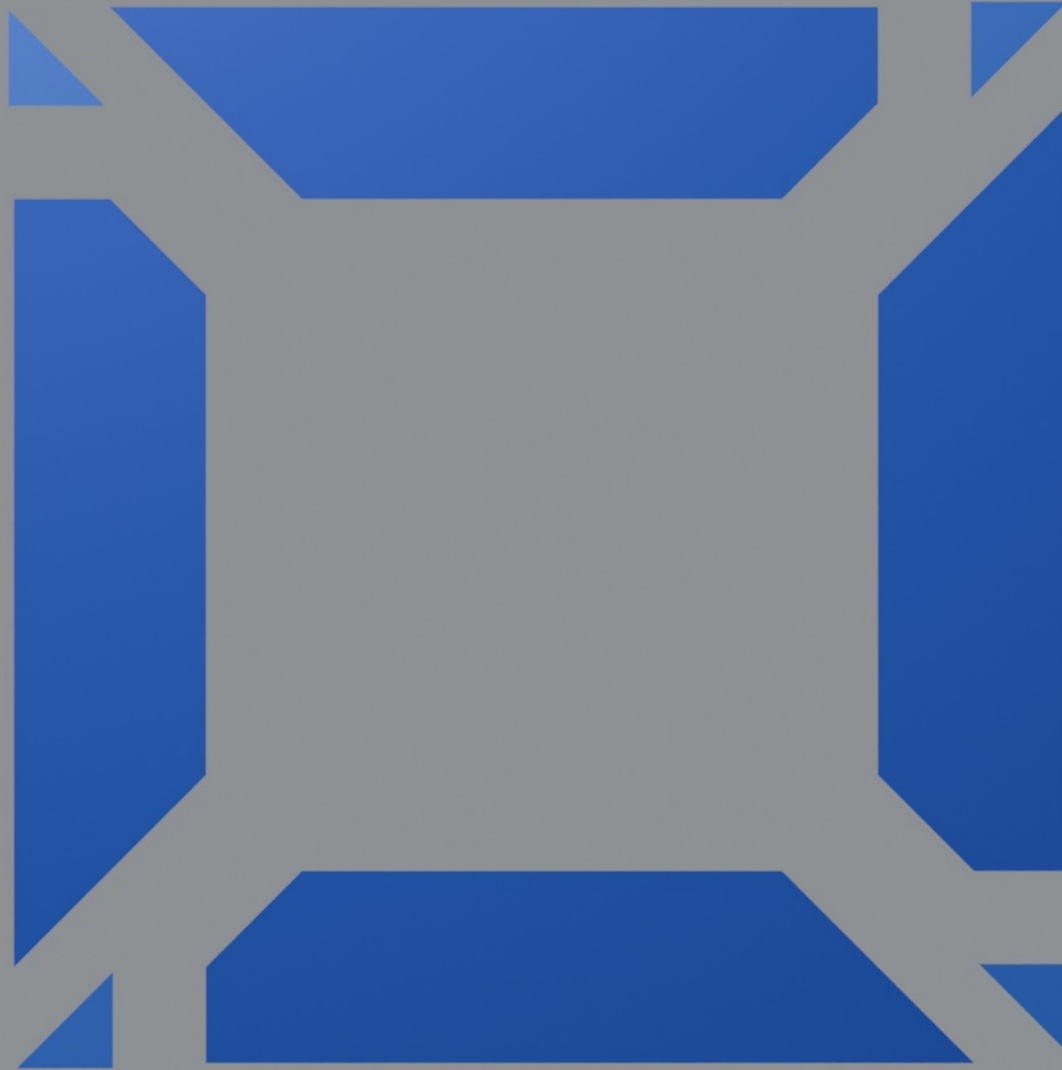

Assembled face: 2700 x 2700 mm / opening: 1500 x 1500 mm. Each corner infill is a right triangle with 300 mm legs.