

Full-size parts sized for the A1 Mini

Twelve uncut posterboard sheets. Four rigid borders. Printed snap releases at gate corners and PVC docks; tied workshop joints.




2716.4 mm outside
1586.8 mm opening

No hinges
No oversized printed ribs
Every printed part has an STL

Four rigid 2152 x 565 mm borders

Printable components / 1

Actual STL orientations. All dimensions in mm. Quantity is per full-size gate; purchased pipes and ties are separate.

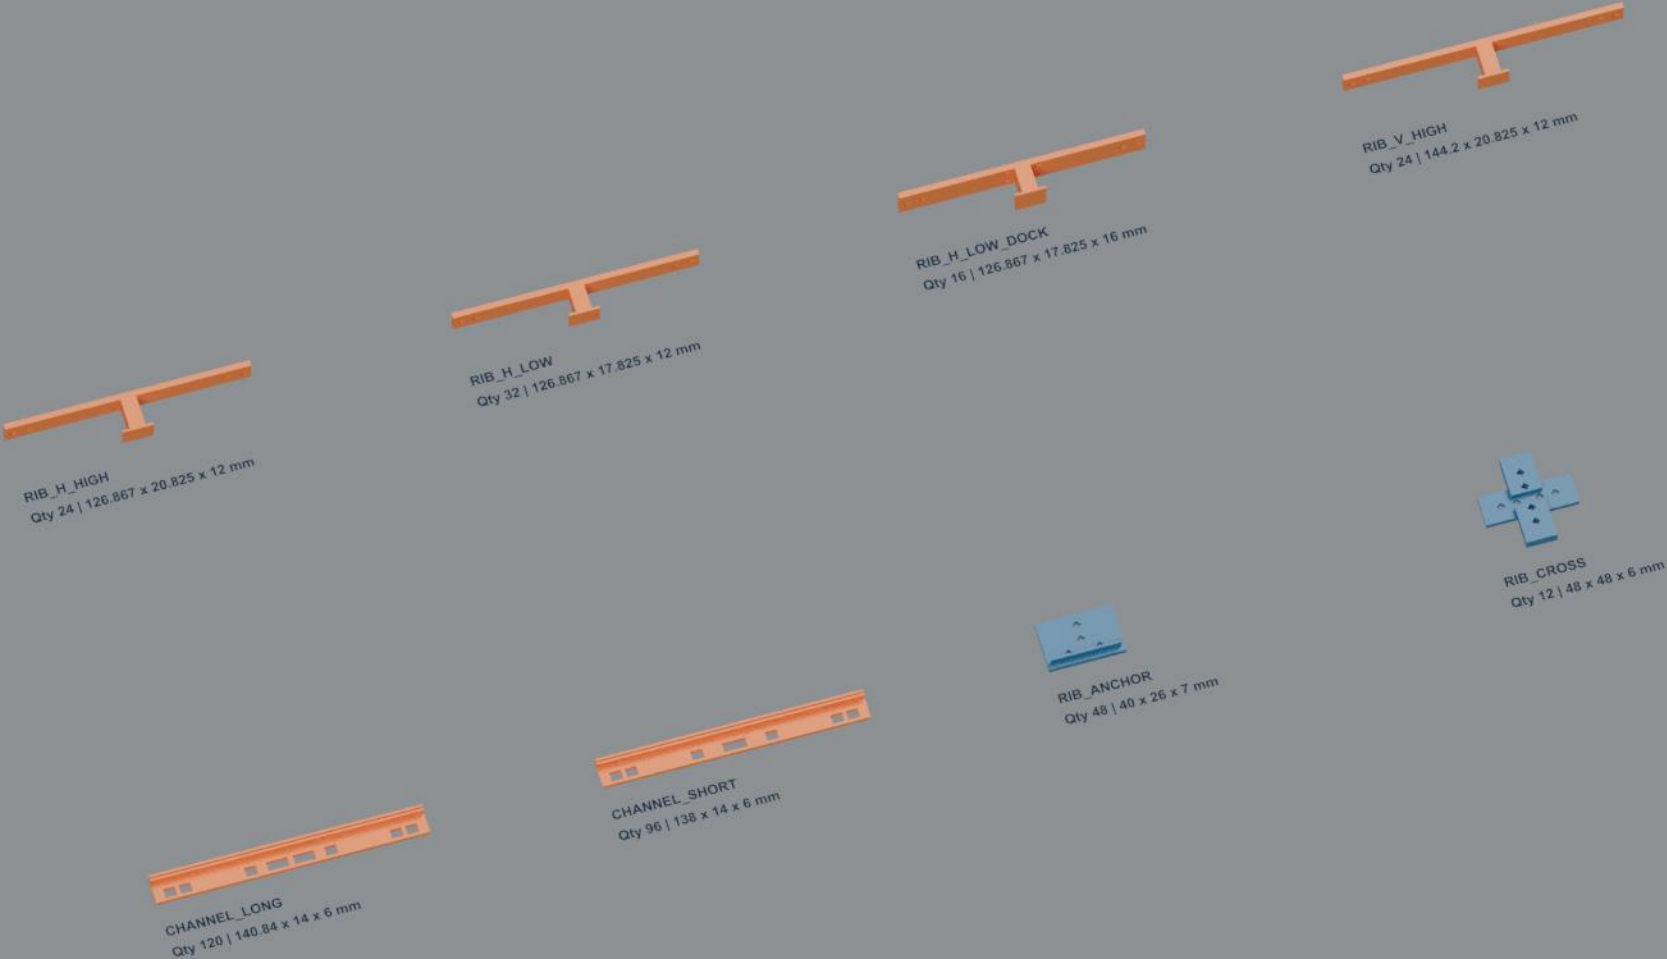

Support-free intent: flat extrusions, upright channels and 45-degree diamond openings. Slice checks and a physical fit print come before production.

Printable components / 2

Actual STL orientations. All dimensions in mm. Quantity is per full-size gate; purchased pipes and ties are separate.

DOCK_CAP
Qty 16 | 24 x 18 x 2.4 mm

DOCK_PEDESTAL
Qty 16 | 7 x 12.35 x 22 mm

FIELD_RECEIVER
Qty 16 | 40 x 24 x 6.4 mm

PIPE_27
Qty 8 | 44 x 35.8 x 16 mm

BRACE_LINK_45
Qty 8 | 103.51 x 127.51 x 3 mm

CORNER_NODE
Qty 48 | 34 x 34 x 7 mm

RIB_V_LOW
Qty 24 | 144.2 x 17.825 x 12 mm

BORDER_BRIDGE
Qty 16 | 60 x 12 x 3 mm

Printable components / 3

Actual STL orientations. All dimensions in mm. Quantity is per full-size gate; purchased pipes and ties are separate.



PIPE_33
Qty 24 | 61 x 43.899 x 16 mm



SNAP_BRIDGE
Qty 24 | 36 x 16.8 x 3 mm



SPLINT
Qty 168 | 40 x 8 x 4.4 mm

Two channel types

One long and one short. Common symmetric mounting windows and cord notches replace nine position-specific variants.



CHANNEL_LONG | 120 per gate | 140.84 mm



CHANNEL_SHORT | 96 per gate | 138 mm

Five long pieces per long edge; four short pieces per short edge. All sheets, corner positions, splice bosses and gate dimensions stay the same.

One backing frame, four diagonal braces

Sixteen removable docks attach the four rigid borders. Every brace has a printed link and two pipe saddles at each end.



Purchased pipe is shown at its target centerline. Add elbows and the retained anchored or ballasted base; tube cut lengths depend on fitting take-up.

Registered splice, two retaining ties


Four hollow bosses locate the two channel ends. The ties pass through those bosses; the solid shoulders carry sliding loads.



The 0.2 mm joint gap is intentional. These permanent workshop joints stay assembled when the four borders are transported.

One snap bridge for corners and docks


Two independent fork latches. Pinch and release one end, lift it slightly, then release the other. Print the bridge flat in PETG.

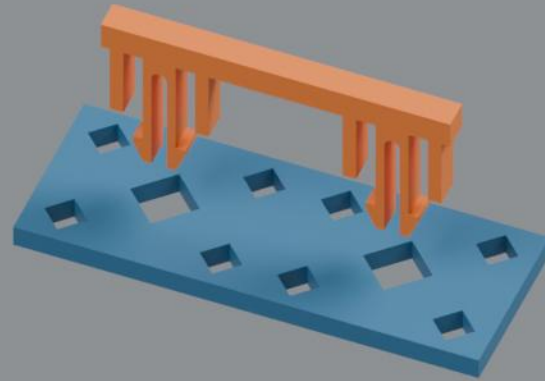

A 7.2 mm diamond socket clears the 3.4 x 3 mm shaft; wider hooks retain a 2.4 mm socket plate. Validate force and repeated release with the fit kit.

One whole sheet, supported from both sides


Segmented rear ribs use alternating lap layers and integrated paper-contact shoes. The stepped central node separates the crossing ribs.

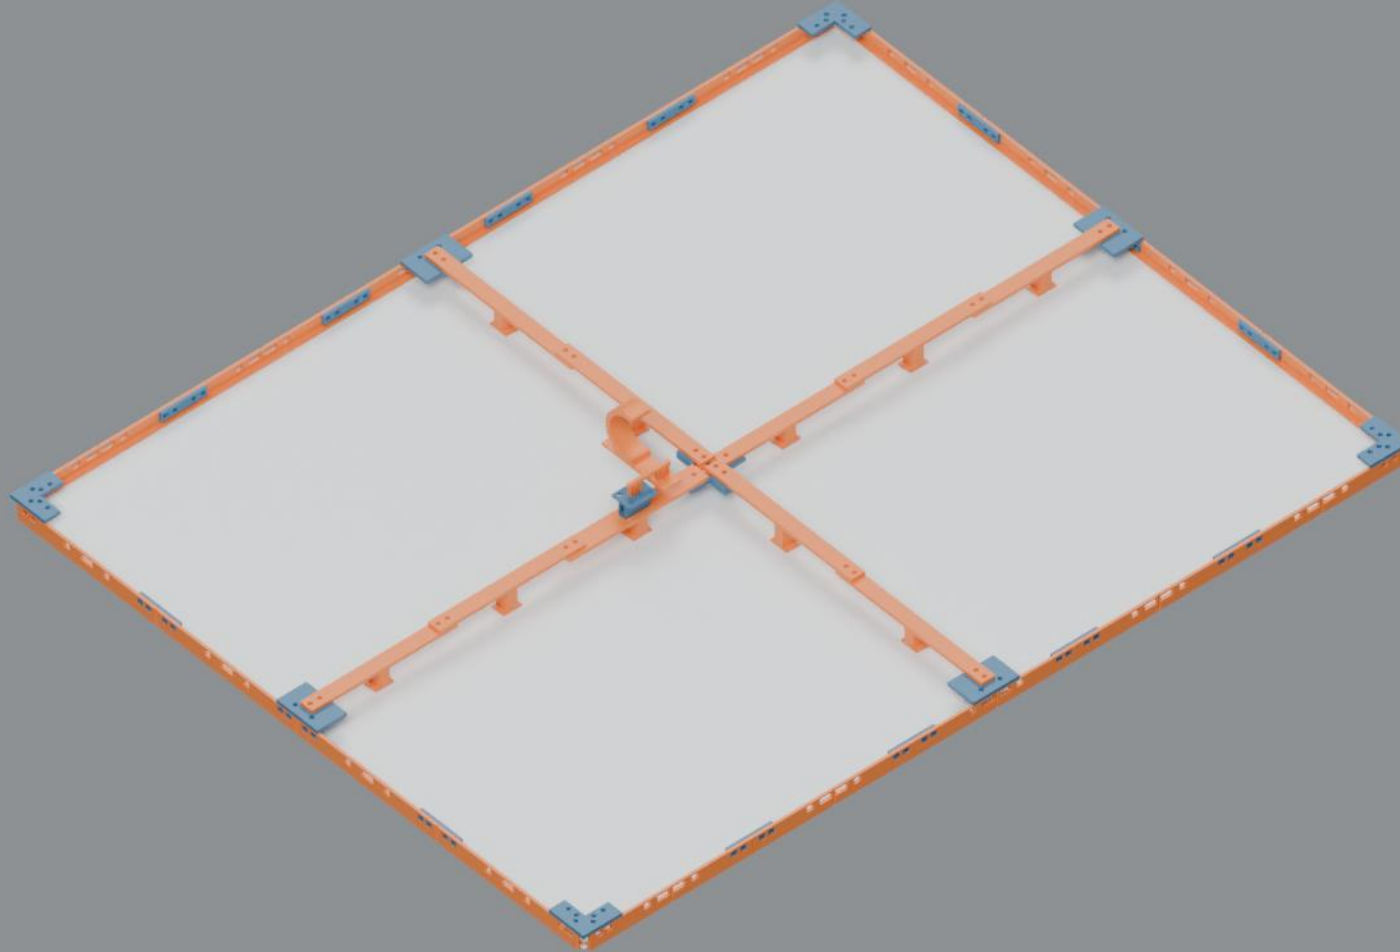

120 short rib pieces per gate replace the unprintable long ribs. Lightly tensioned front cord crosses each sheet; keep all twelve sheets uncut.

PVC docks and printed brace-end links

Left: snap bridge couples a rib pedestal to the frame saddle. Right: two tied C saddles connect a diagonal brace to the same backing frame.

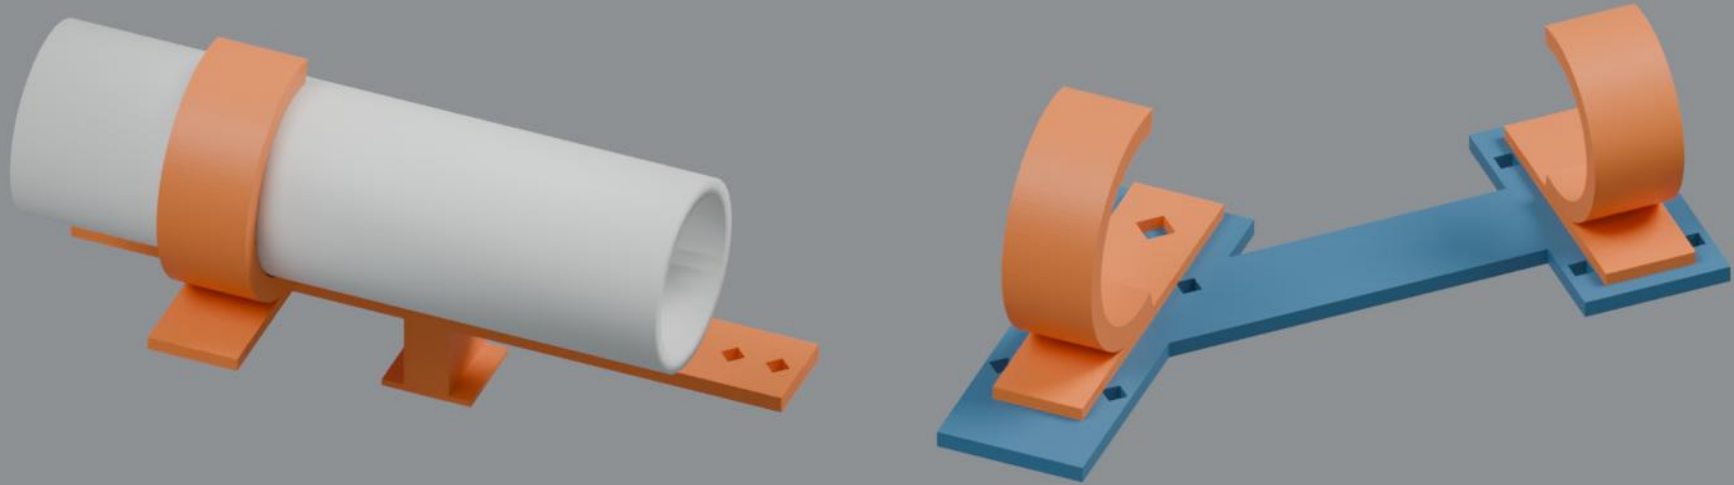

Every C saddle needs a keeper tie around pipe and saddle. The brace link uses four additional heavy ties. No cross-lashed pipe-to-pipe joint remains.