

Whole sheets. Four rigid borders.

Twelve uncut 22 x 28 in inserts. Permanent internal splices. Release only the four gate corners and the PVC docks.



NO HINGES / NO FOLD LOCKS

4 borders: 2146 x 563 mm
8 removable corner bridge keys
One PVC backing + four braces


2708 mm outside
1583 mm clear opening

PETG planning: 1.84 kg
About \$49 face materials
PVC / anchoring additional

Long rigid borders require 2.15 m transport space. Cardstock stays installed. Permanent small rail splices are workshop assembly.

Transport four long, flat sections

Each section keeps its three whole sheets, rear cross ribs and permanent rail joints. Nothing folds or creases.

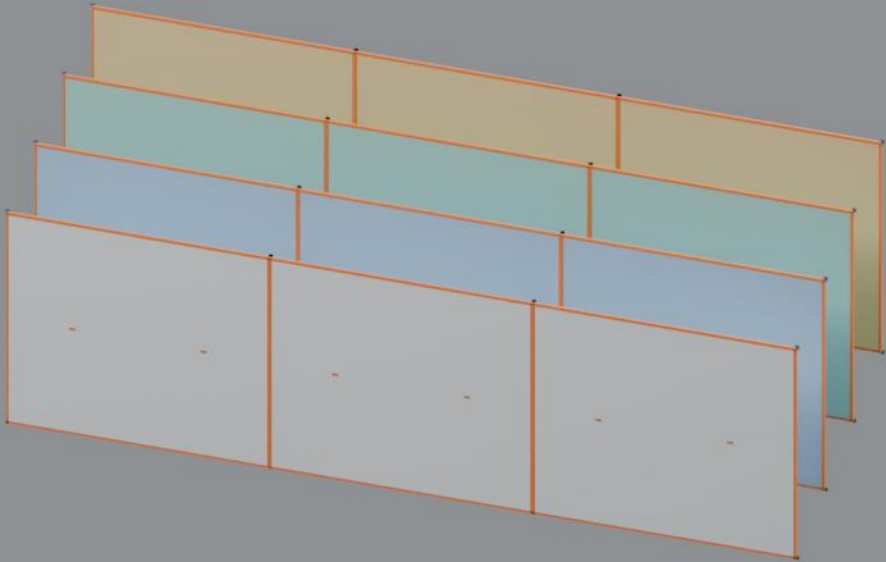

2145.6 x 562.8 mm


About 20-30 mm thick per border
Allow pads between loaded faces

REMOVED FROM OPTION C

16 hinges and their pins
16 fold-lock bridges
Offset mounts / folding clearance

The hinge becomes a fixed splice

Slide-in paper channels and rear ribs remain. Short printed rails still need rigid workshop nodes and removable paper end caps.

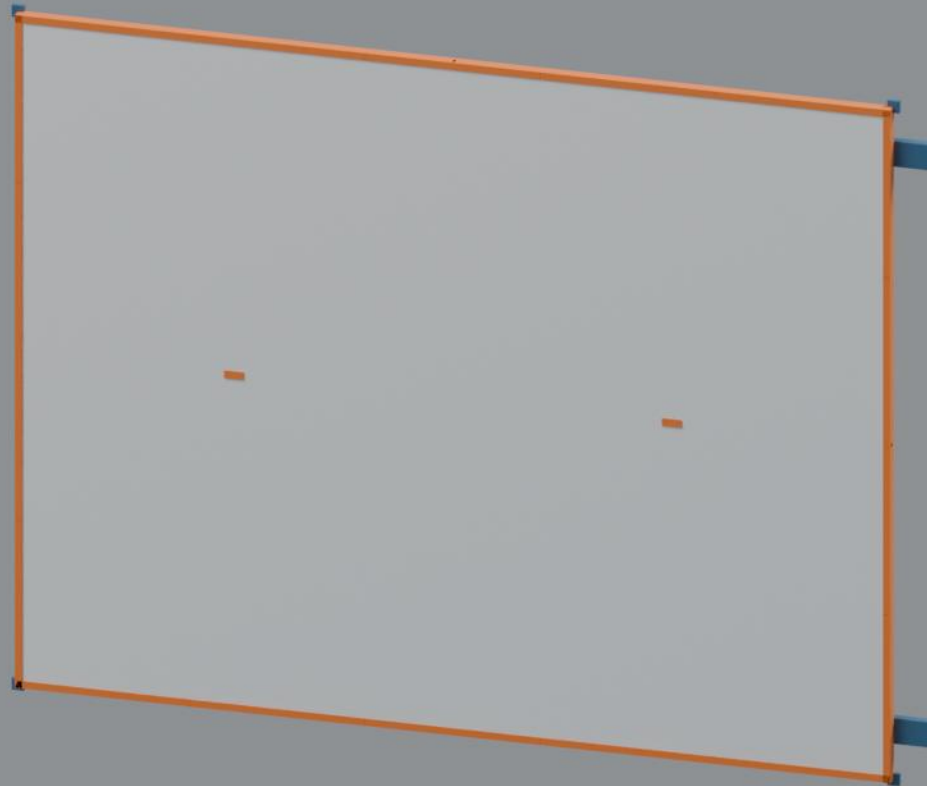


216 short rail pieces per gate

Removing folding does not remove the A1 Mini bed-size constraint

Only eight field corner keys

Print a four-part 1:15 assembly model

The complete miniature is 180.6 mm square with a 105.5 mm opening. Four long borders join with eight removable press-fit keys.

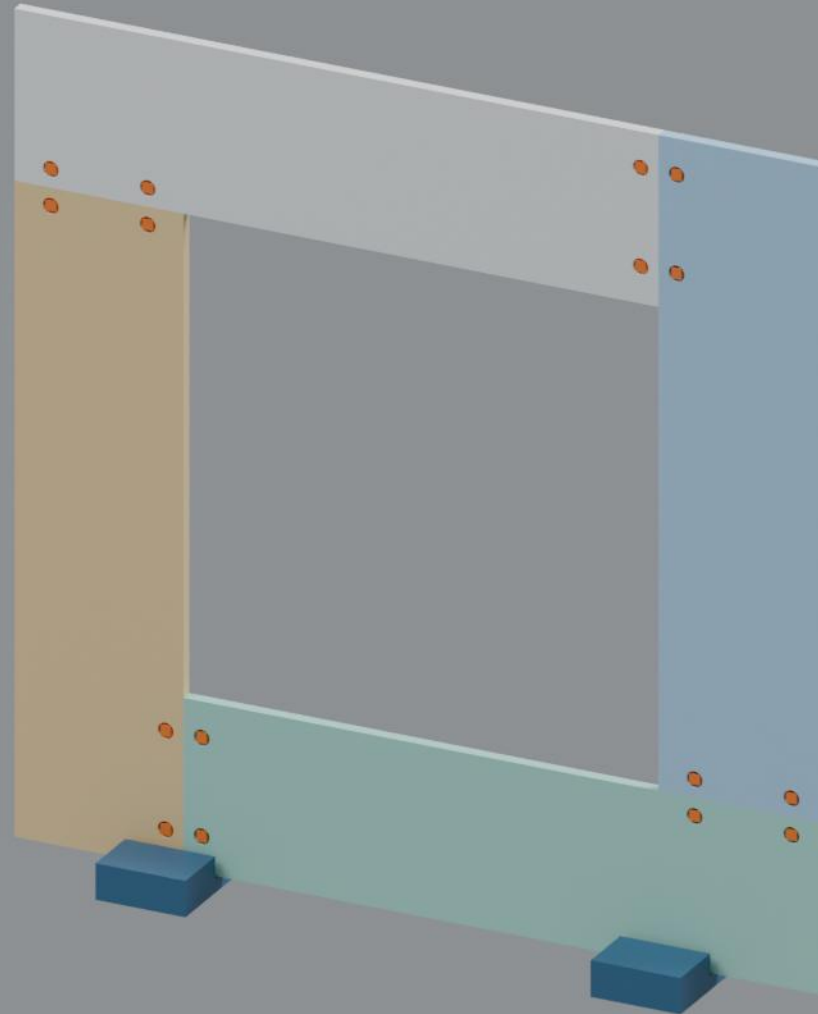

143.04 x 37.52 mm / border

Print 4 borders + 8 keys

Optional: 2 tabletop feet

WHAT IT TESTS


Proportions and corner assembly

Handling four rigid sections

Not wind strength or full-size snap fit

One plate for the four-part model




1:15 / four 143 x 38 mm borders plus eight miniature press-fit bridge keys. Print all parts at 100% file size.

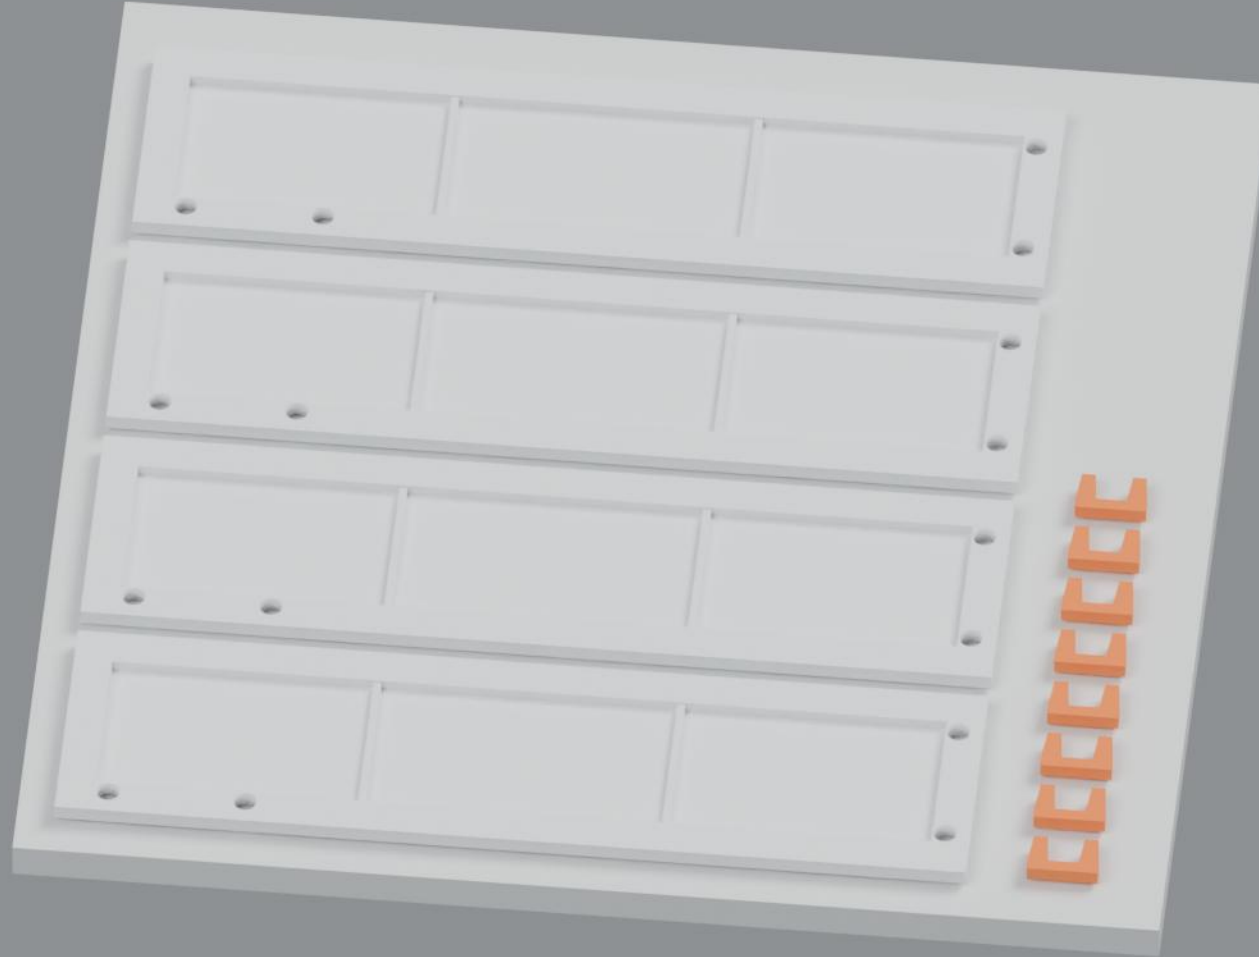

Feet and fit gauge are separate small prints. No supports intended. Miniature keys demonstrate assembly; they are not scaled production snaps.

Check the miniature connector first

A tapered two-peg bridge presses into paired holes. Pull it out to separate the sections. No miniature hinge or fragile scaled latch.

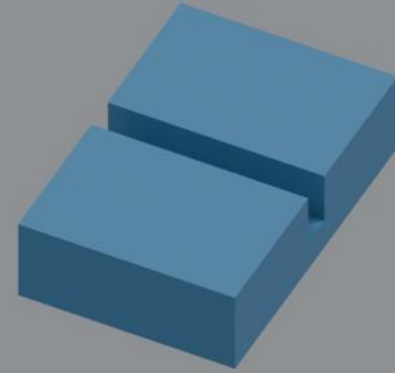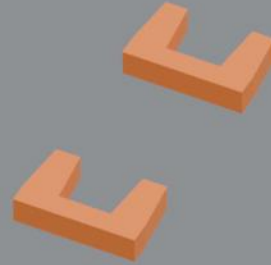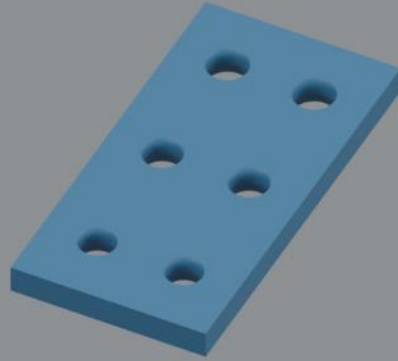

GAUGE ROWS

From Y=0 end: 3.4 / 3.6 / 3.8 mm

Model sockets are 3.6 mm

TWO KEY FITS

Standard + looser alternative

Use the gentlest secure fit