


FPV / 2700

Four symmetric panels. Four square corners. One braced PVC backing frame.

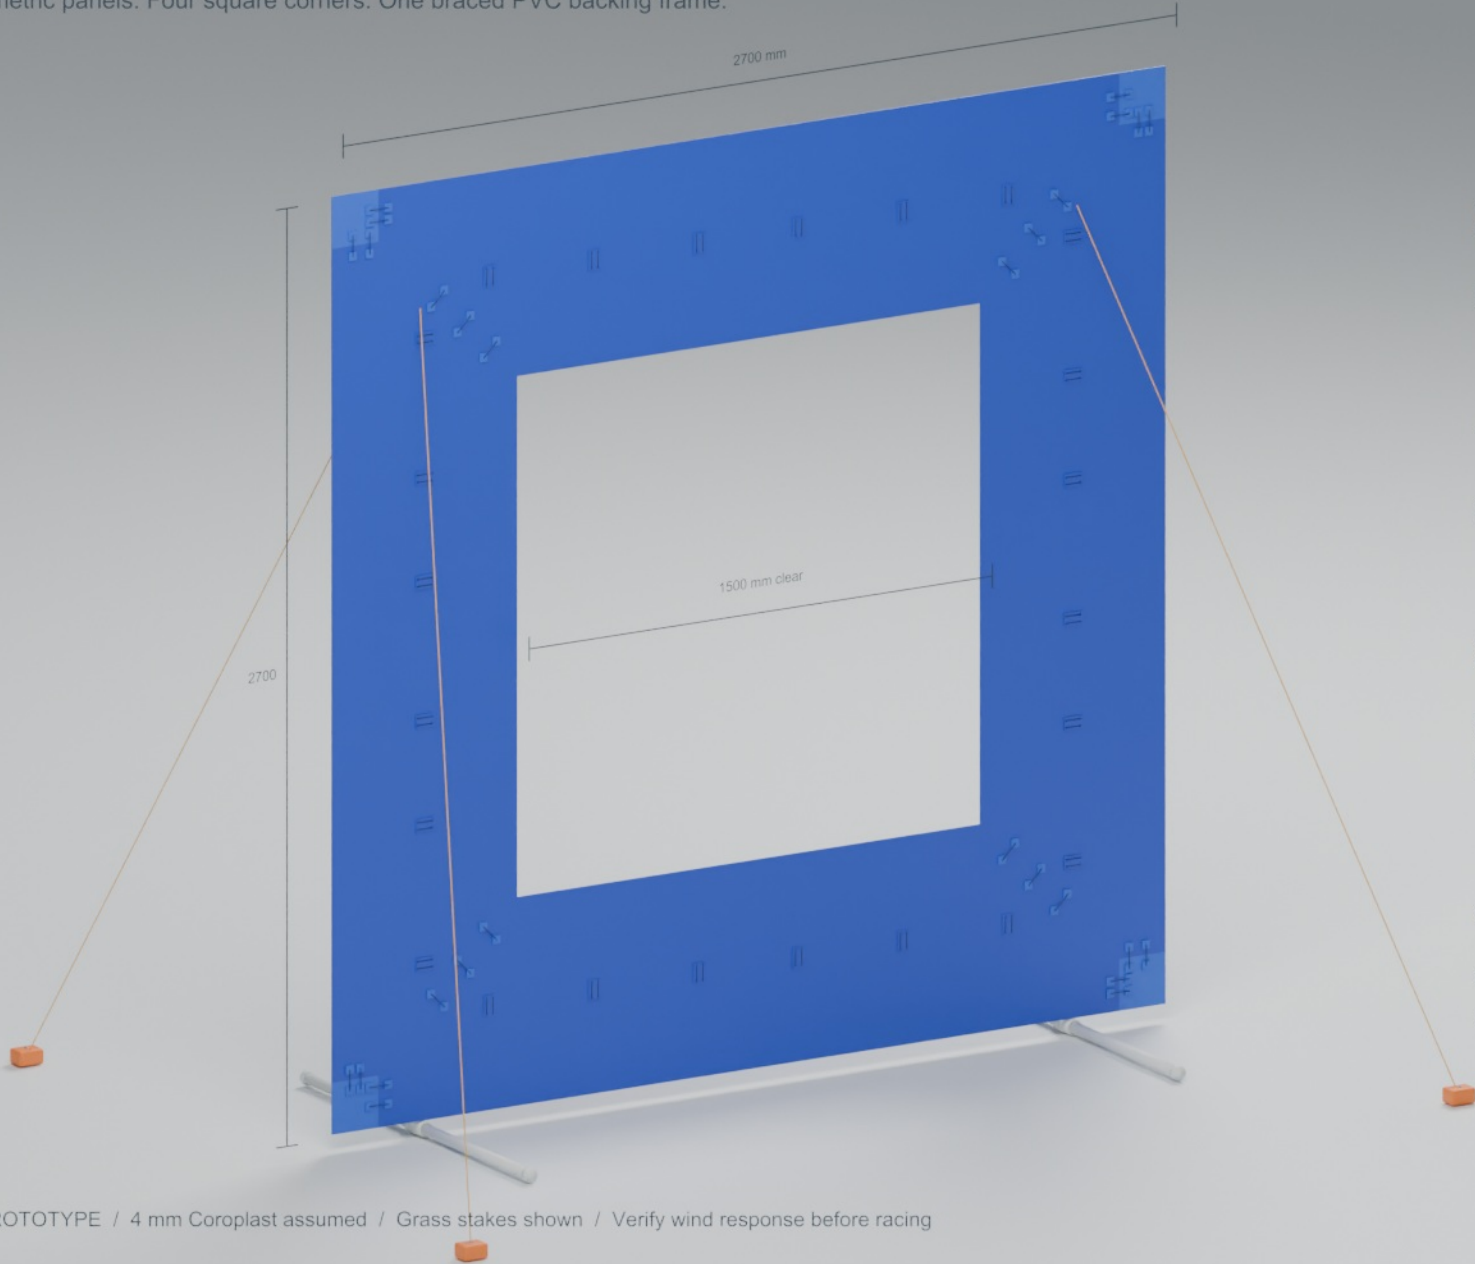

2700 x 2700

Face / 600 mm border

1500 x 1500

Clear opening / shallow backing

2 sheets per face


Shared corner sheet: 32 gates
One frame + four corner braces

Stake in both directions

Feet and anchors extend
beyond the shallow gate body.

The structure behind it

One 1 in backing frame, four 3/4 in braces and eight printed brace-end joints.

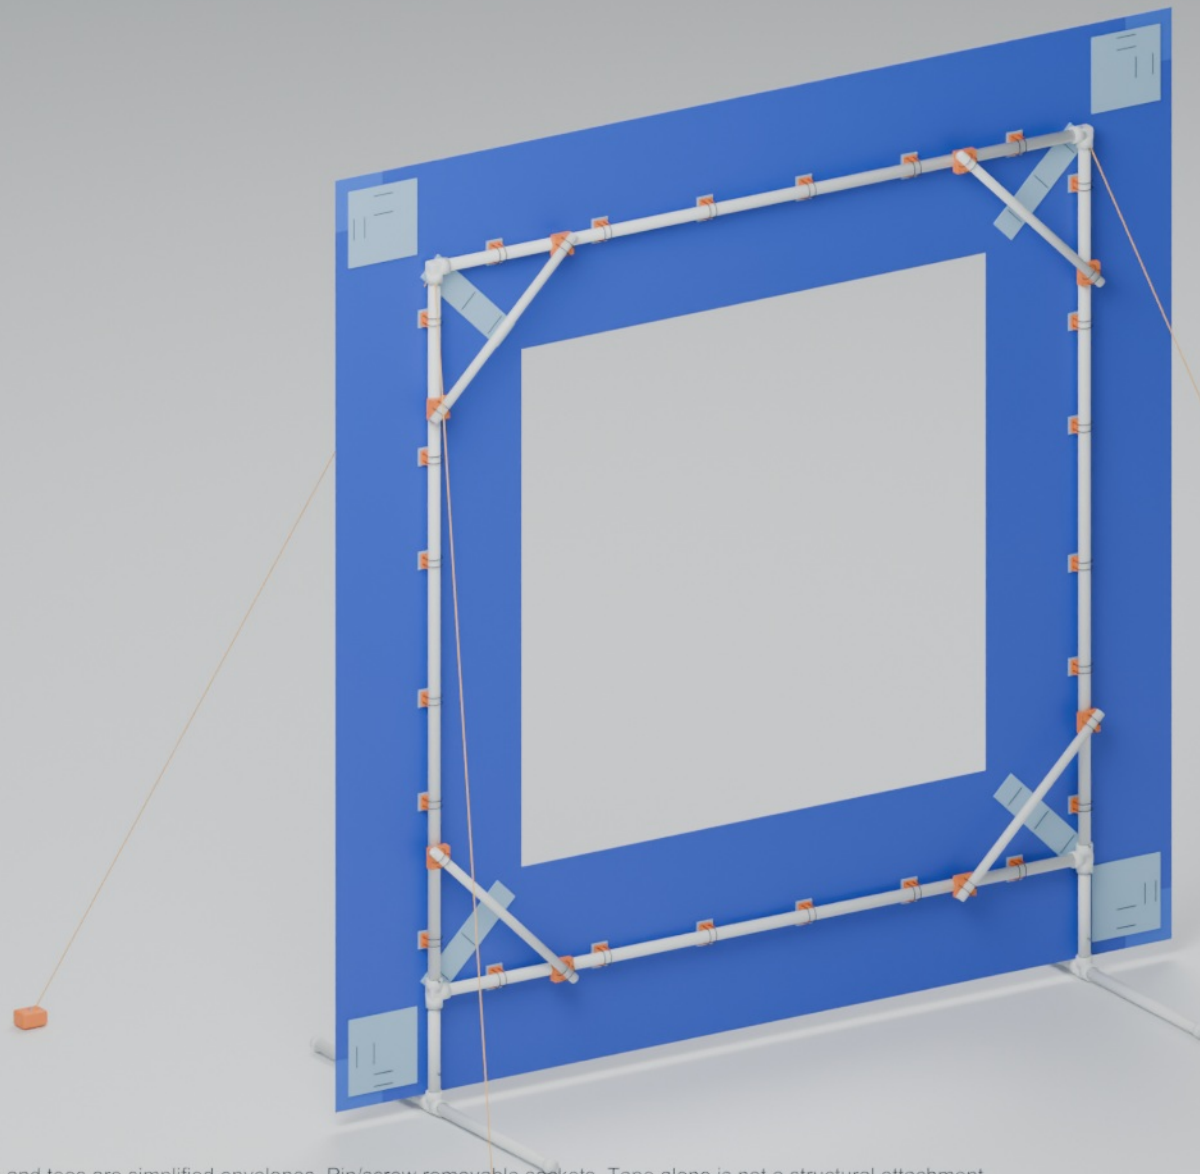

01 / MAIN FRAME

1 in Schedule 40 PVC
2100 x 2100 mm centerlines

02 / CORNER BRACES

3/4 in PVC / 4 x 646 mm
Printed 45-degree joints

03 / PRINTED JOINTS

Eight positive-angle connectors
Two tie pairs per connector


04 / BASE

1200 mm fore-aft pipe feet
Four anchors resist reversal

Purchased elbows and tees are simplified envelopes. Pin/screw removable sockets. Tape alone is not a structural attachment.

Assembly / layer by layer

Symmetric panels + squares -> scrap backers -> saddles -> one backing frame with corner braces

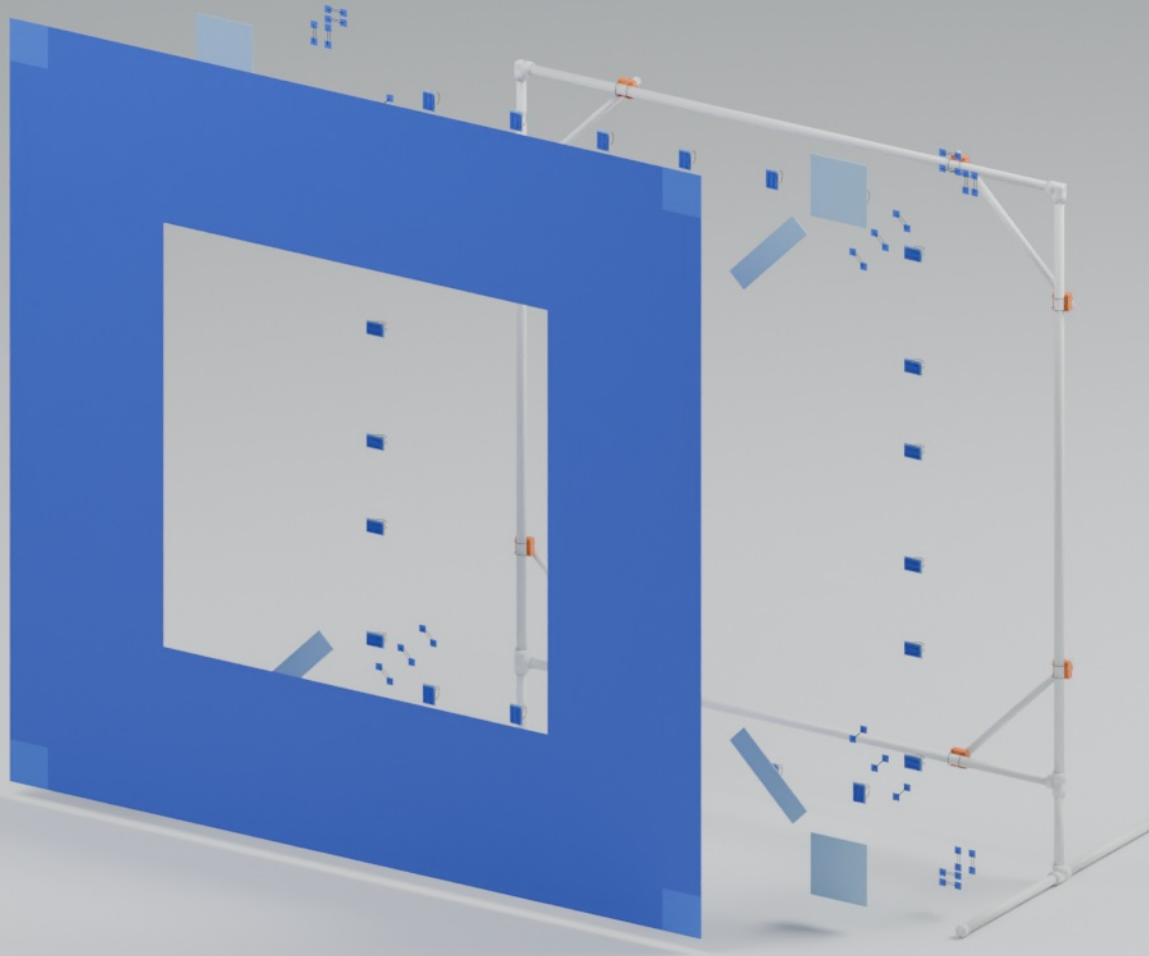

1 CUT + SPLICE

Four identical 2400 x 600 blanks
Four 150 x 150 mm squares

2 BUILD THE FRAME

Standard tees and elbows
Add braces and broad feet

3 TIE ON THE FACE

24 saddles / two ties each
Use washers + scrap pads

4 STAND + ANCHOR

Fit the selected feet and guy lines

Two identical cuts per sheet

Sheets 1 and 2 make four symmetric panels. Share sheet 3 across the fleet.

SHEET 01

1219.2 x 2438.4 mm



4 MAIN PANELS / GATE

2400 x 600 mm bounding blanks

SHEET 02

1219.2 x 2438.4 mm




BACKERS FROM OFFCUTS

4 strips + 4 square backers

SHEET 03

1219.2 x 2438.4 mm

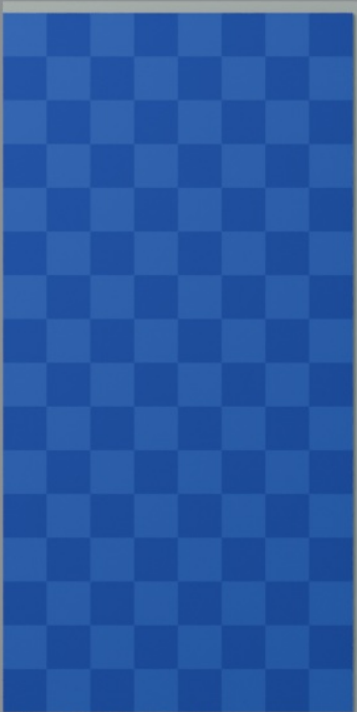


128 SQUARES / SHEET

150 mm squares = 32 gates

Tie-retained saddle


Two ties per attachment. Broad contact. No snap-fit dependency.

EXPLODED

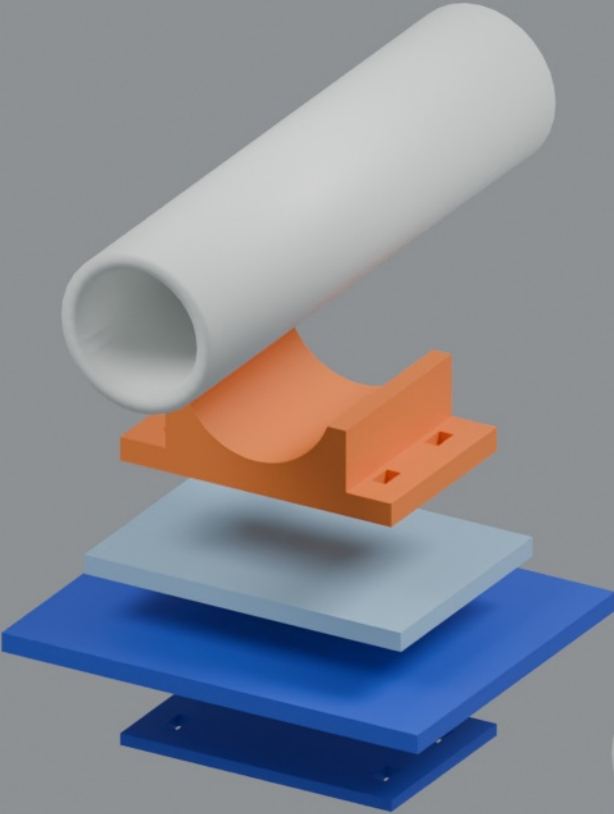


- 1 in PVC / OD 33.40 mm
- PETG saddle / 60 x 40 x 18
- 4 mm scrap pad + 4 mm face
- Front washer / 2.5 mm

ASSEMBLED

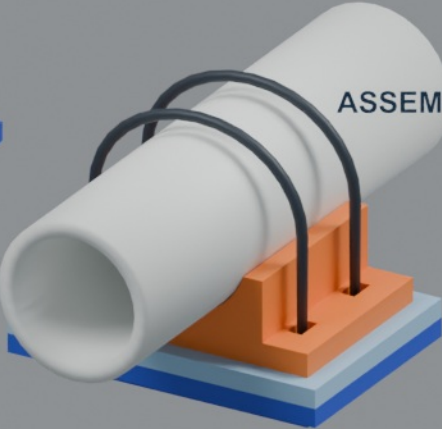

Dimensions / front elevation


All dimensions in millimetres. Clear opening: 1500 x 1500. Shallow single-frame construction.

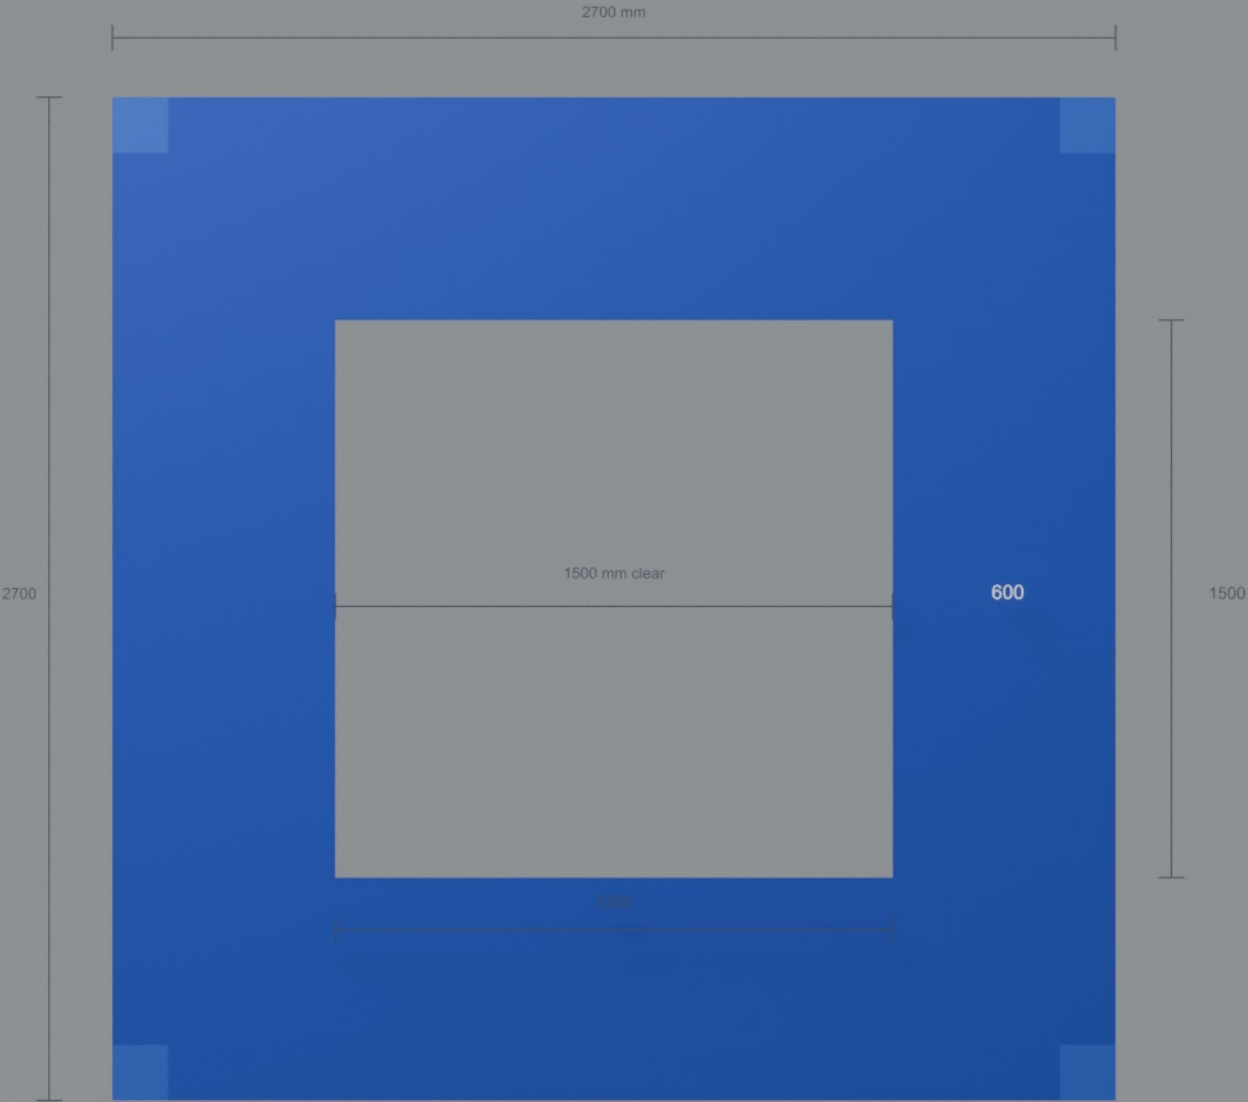

Face: x = -1350..1350, z = 0..2700. Opening: x = -750..750, z = 600..2100. Body thickness: about 96 mm including ties; excludes feet and guys.

Hard ground / contained base


Longer feet carry the guy anchors. Ballast is strapped to the feet, over anti-slip mats.

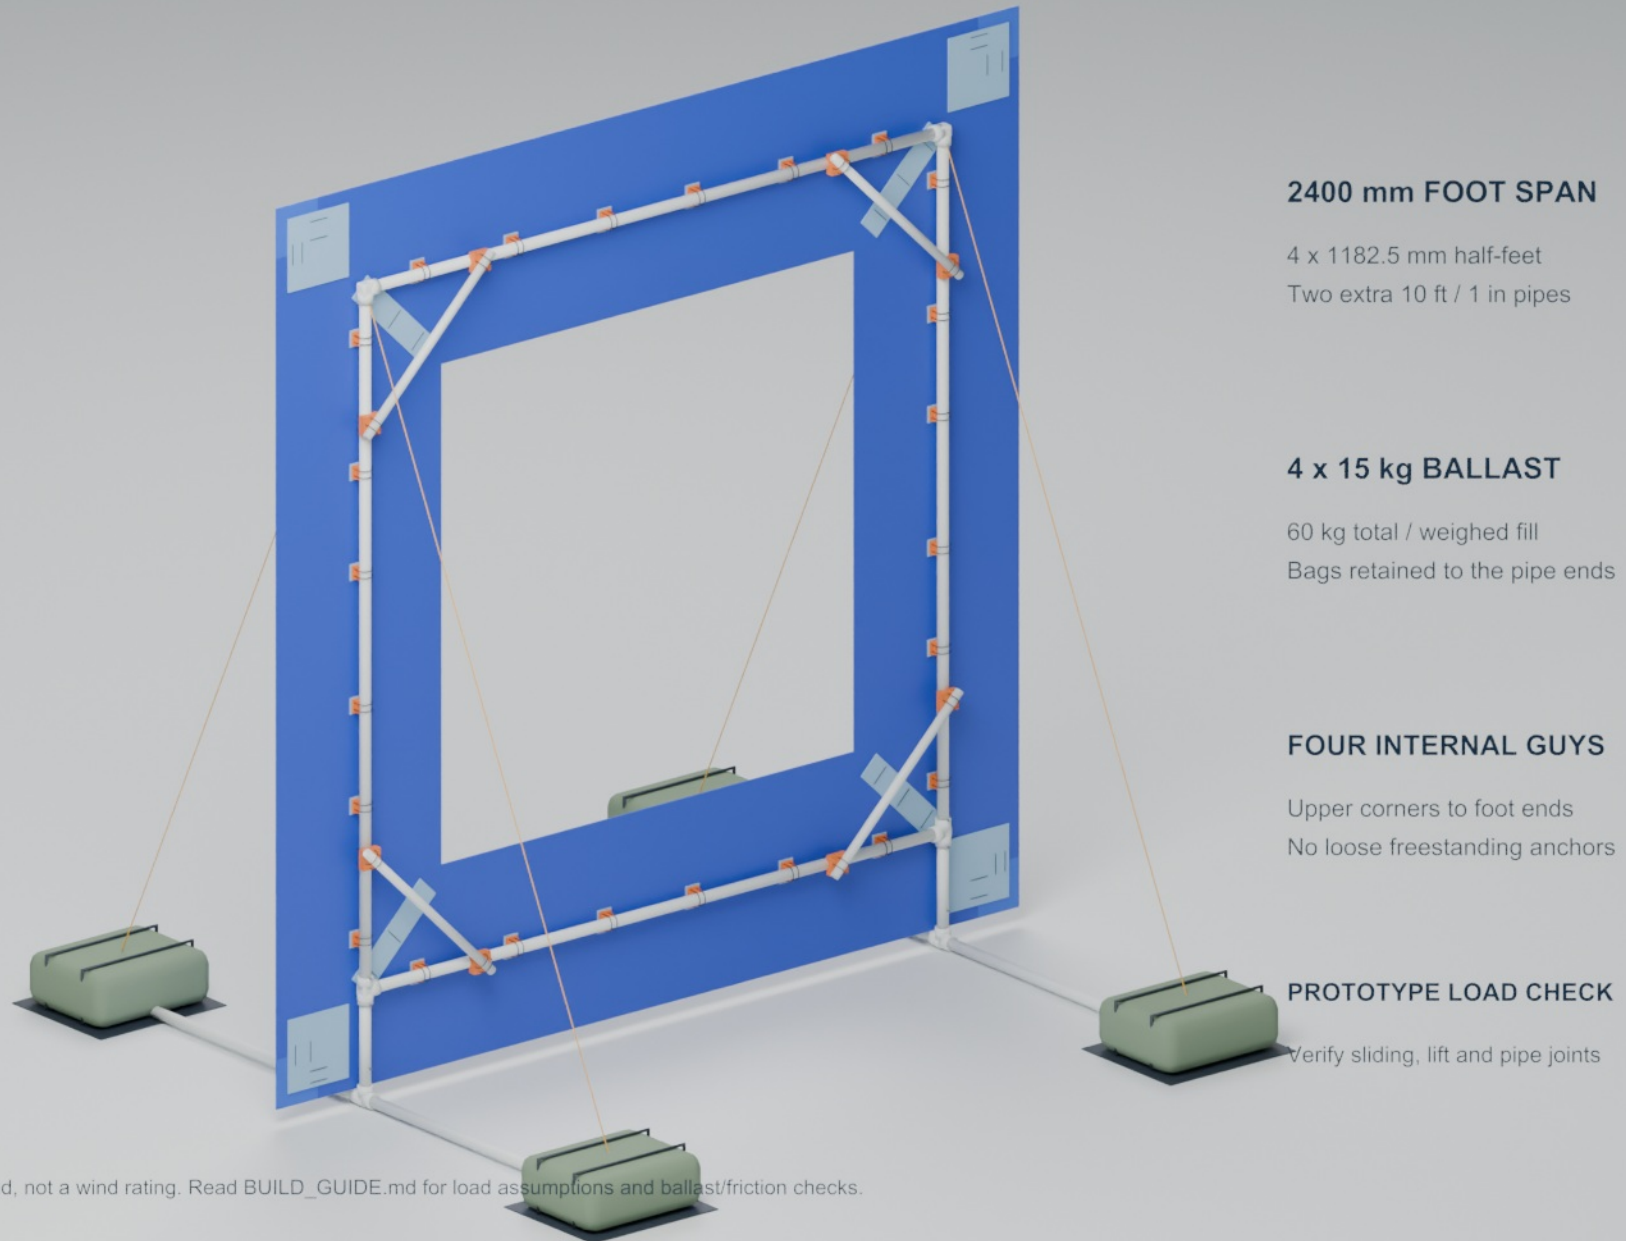

Baseline for testing in slight wind, not a wind rating. Read BUILD_GUIDE.md for load assumptions and ballast/friction checks.

A positive seat at both ends

Two modeled pipe cradles fix the crossing angle; four ties retain each printed joint.

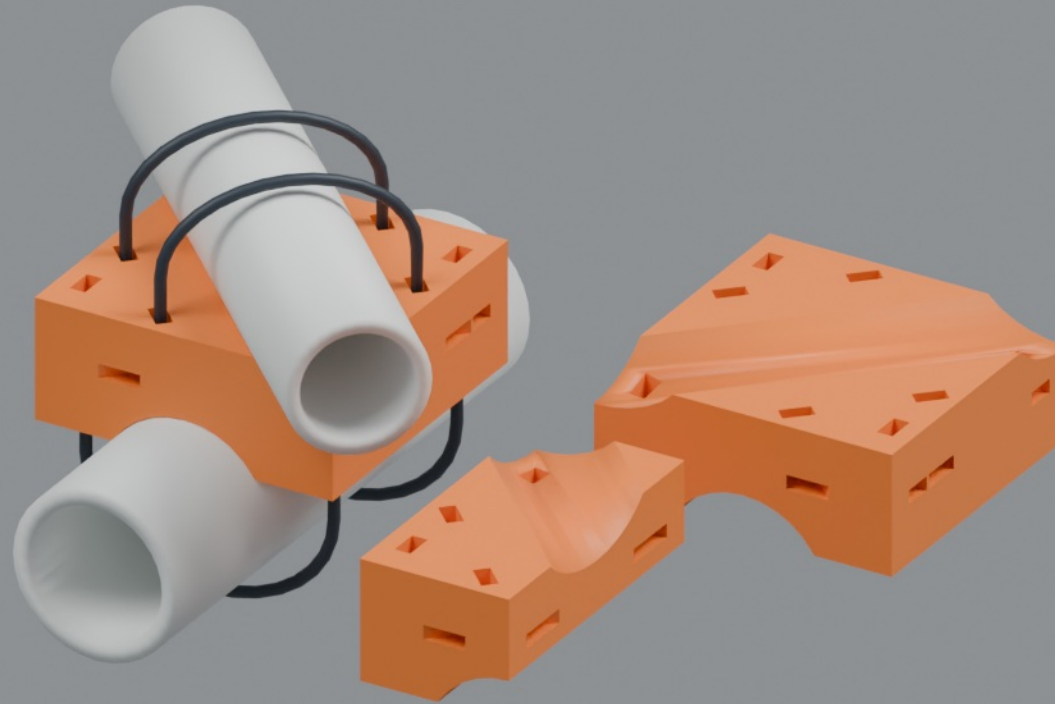

1 in main / OD 33.40

3/4 in brace / OD 26.67

8 JOINTS / GATE


4 x +45 and 4 x -45
60 x 60 x 24 mm body
Internal tie-return tunnels

TIE RETENTION

Two ties around each pipe
Print a fit sample first

Symmetric cuts. Square corners.



Identical border pieces rotate through 90 degrees. All long midspans stay continuous.

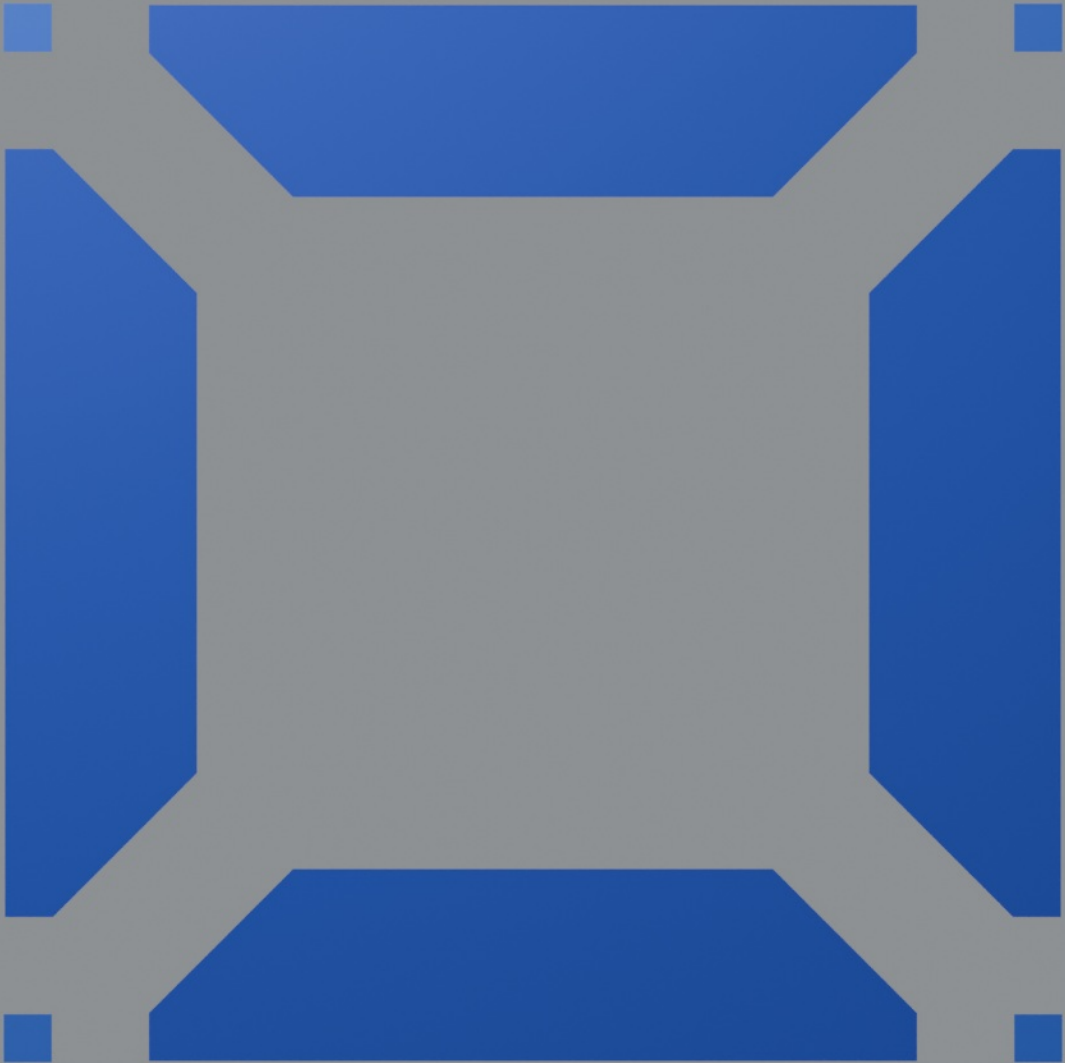

Assembled face: 2700 x 2700 mm / opening: 1500 x 1500 mm. Four 150 x 150 mm squares. Main panels have matching 45-degree cuts at both ends.

Small jigs. Long straight cuts.

A1 Mini: 180 x 180 mm bed. Largest jig: 155 x 155 mm; add a 5 mm brim if needed.

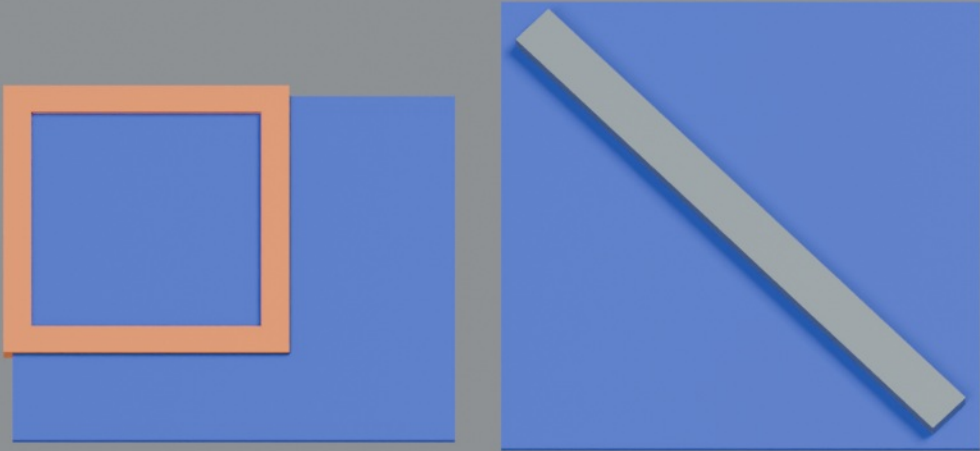

150 mm SQUARE

Corner cuts + shoulder marks
Flip fences downward to use

45-DEGREE ALIGNMENT

Register edge; align a metal ruler
Verify both measured endpoints

TIE-SLOT TEMPLATE

60 mm between tie legs
Center notches track the seam

Jigs are marking/registration tools. Clamp a metal straightedge for knife cuts. Verify a printed gauge with a steel rule before use.