




# ANTEVERTA

microwave

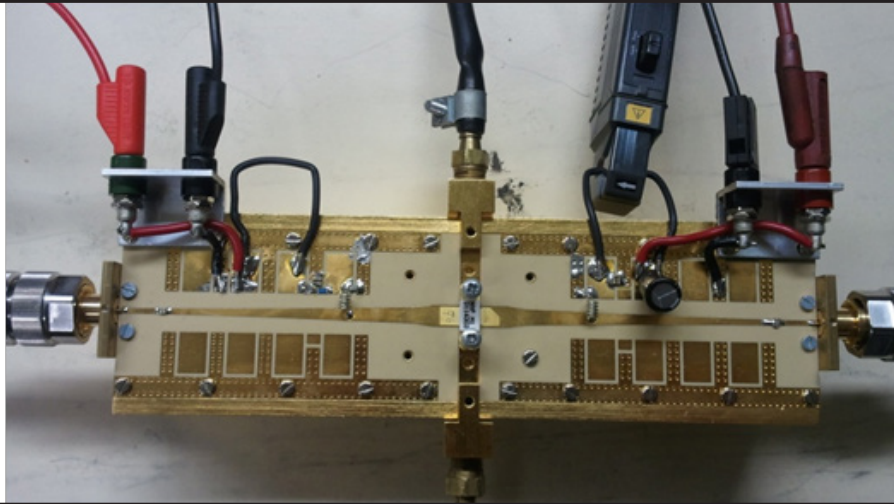

## ***AV-F 467 Load-pull Transistor Test Fixture with impedance transformation***


### *Features (typical performance)*

- Wide-band 500 MHz to 10 GHz design
- 50  $\Omega$  to 10  $\Omega$  impedance transformation
- 6.5 mm line width at transistor package
- High-current integrated biasing line
- High power design up to 200 W CW
- APC-7 mm connectors
- Interchangeable inserts for multiple device packages

### *Accessories provided*

- TRL Calibration Kit
- 1 DUT Insert with connections for Water Cooling

## Typical $S_{21}$ data of AV\_F 467 with Thru connection

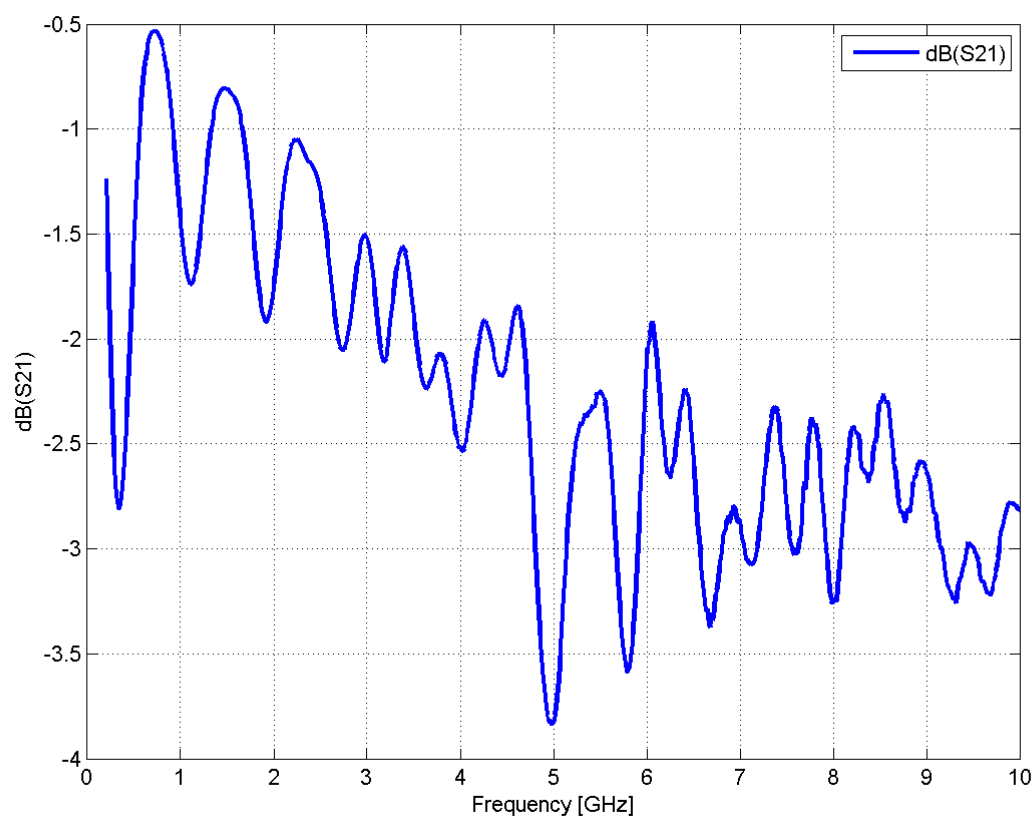

## Typical $Z_{11}$ data of AV\_F 467

