Renate Buist

S6132049

Documentation – skills illustration

For this projected I documented the steps used to reach the following project. The main flow of the project can be seen in the screenshot of the ModelBuilder in ArcGIS (figure 1).

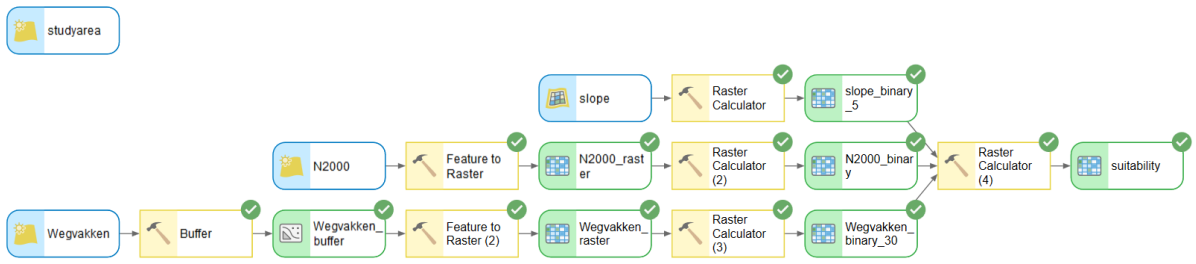


Figure 1. Screenshot of ModelBuilder in ArcGIS. In blue: original datasets. In yellow: tools used. In green: datalayers that were produced by the model, including the final layer 'suitability' which was used in the final map.

A buffer of 30 meter was made around the roads (Wegvakken) layer. This feature layer was rasterized so that a raster calculator could be used, transforming the data into a raster where cells that lay within the 30 meter buffer get a score of '1' and cells that lay outside this buffer get a score of '0'.

The Natura2000 layer was rasterized again so that the raster calculator could be used. A raster was thus created where cells outside the Natura2000 areas would get a score of '1' and cells that lay within the Natura2000 areas would get a score of '0'.

A raster calculator was used directly on the slope rasters. Cells with a slope equal to or below 5 degrees got a score of '1' and cells with a slope above 5 degrees got a score of '0'.

A raster calculator was used to sum these three raster, giving each cell a score between 0 and 1.