



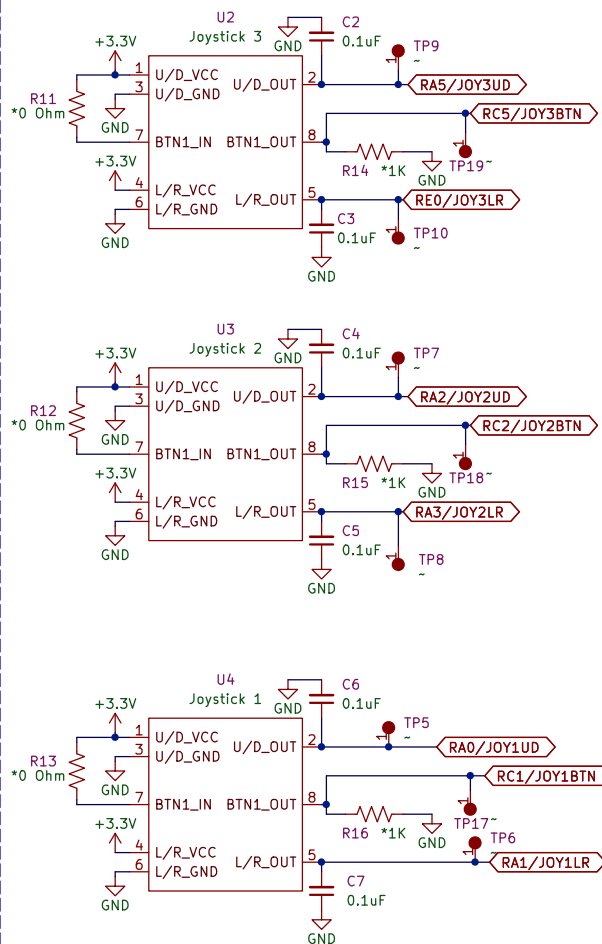


*All Pull-Up Resistors
Are Optional. (0 Ohm)

*All Pull Down Resistors
Are 1k

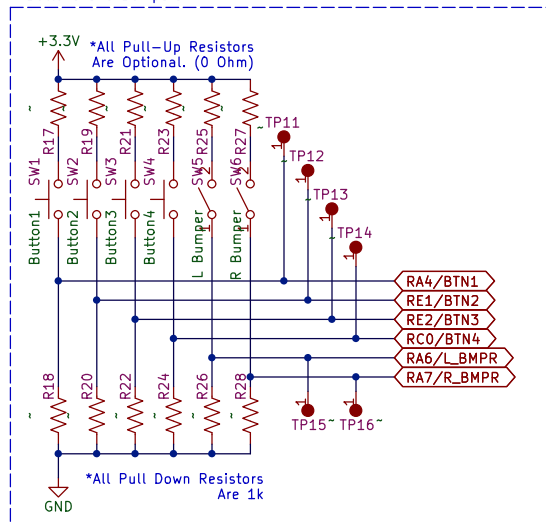

*All Pull-Up Resistors Are Optional. (0 Ohm)

*All Pull Down Resistors
Are 1k

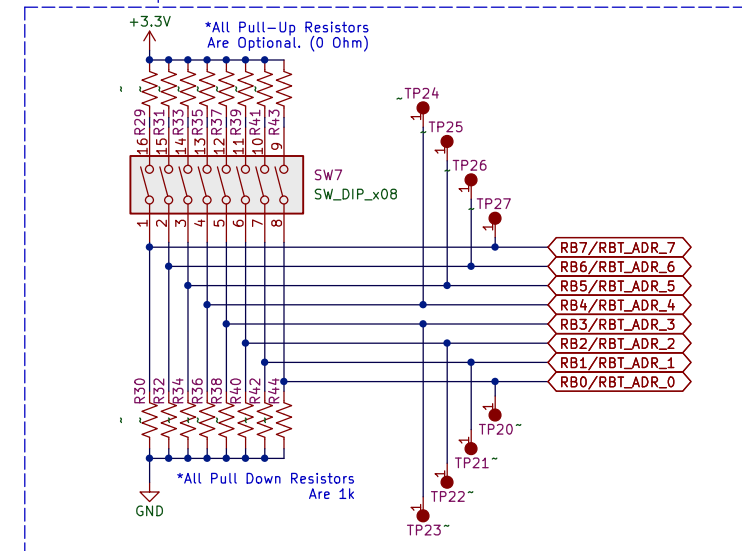

*All Pull-Up Resistors
Are Optional. (0 Ohm)

All Pull Down Resistors
Are 1k



**Idaho State
University**

Robotics & Communications Systems Engineering Technology

Idaho State University

Robotics & Communications Systems Engineering Technology
1152 Martin Luther King Jr BLVD
Pocatello ID 83209
Drawn By:

Title: Universal Controller

Sheet: Controls


Size: A

Date: 2024-11-22

Rev: C

KiCad E.D.A. 9.0.7

Id: 2/5

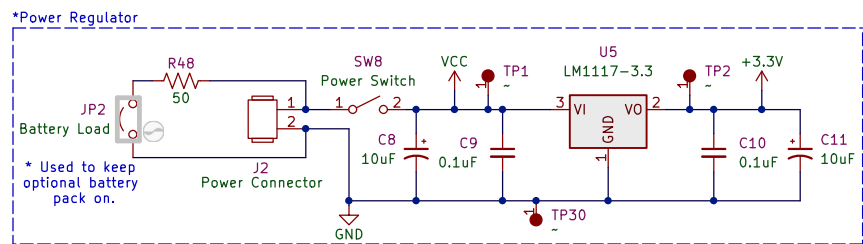

**Idaho State
University**

**Robotics & Communications
Systems Engineering Technology**

Idaho State University

Robotics & Communications Systems Engineering Technology
1152 Martin Luther King Jr BLVD
Pocatello ID 83209
Drawn By:

Title: Universal Controller

Sheet: Power

Size: A


Date: 2024-11-22

Rev: C


KiCad E.D.A. 9.0.7

Id: 3/5

* XBEE Communication

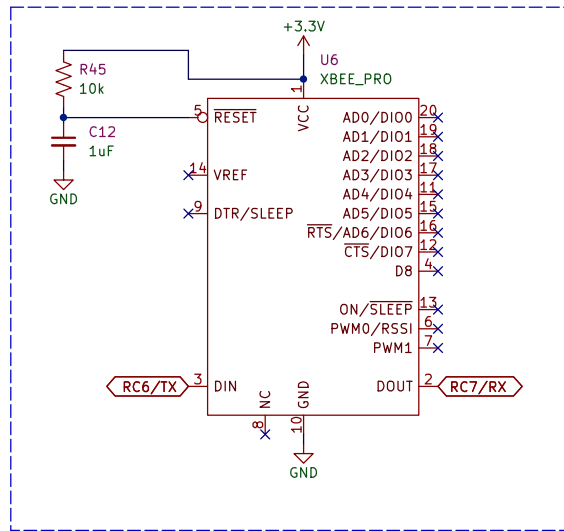

* I2C Communication

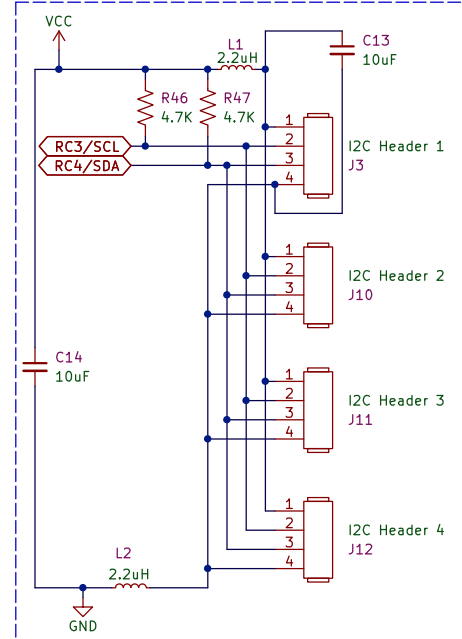

Idaho State
University

Robotics & Communications
Systems Engineering Technology

Idaho State University

Robotics & Communications Systems Engineering Technology
1152 Martin Luther King Jr BLVD
Pocatello ID 83209
Drawn By:

Title: Universal Controller

Sheet: Communications

Size: A

Date: 2024-11-22

Rev: C

KiCad E.D.A. 9.0.7

Id: 4/5

*These components are excluded from the PCB design.
 This Max-232 is used to convert the transmission data
 from the CMOS logic(0-3.3V) of the PIC to RS-232 standard
 of -10V to +10V to communication with a computer over USB.
 This circuit must be used when using the companion test
 software developed in Visual Basic.

Companion Test Software