



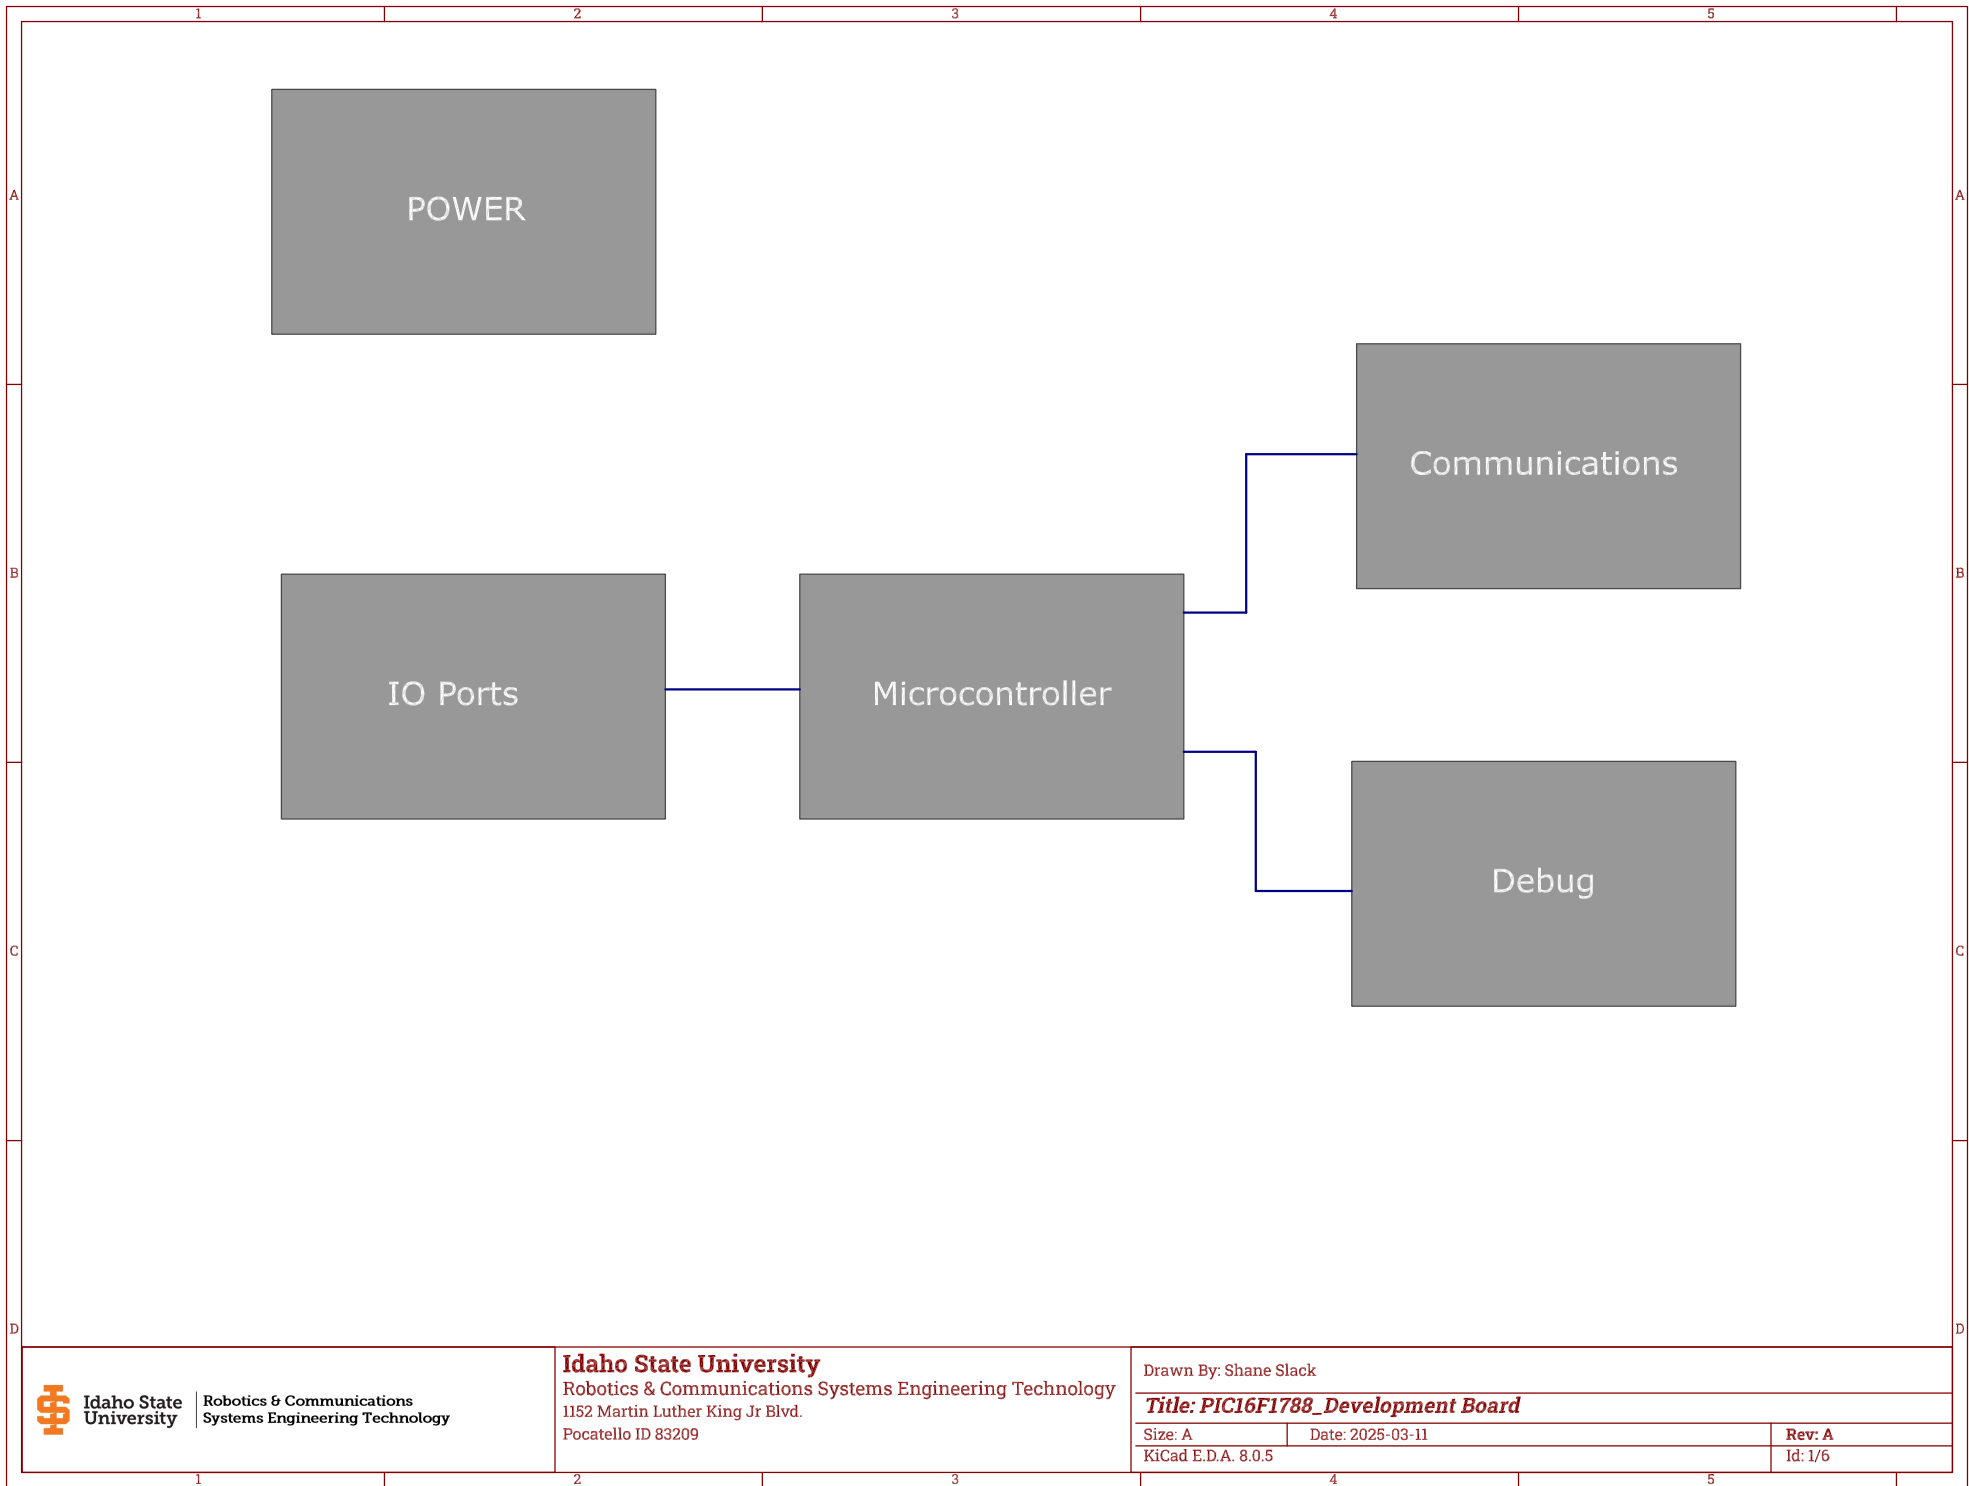

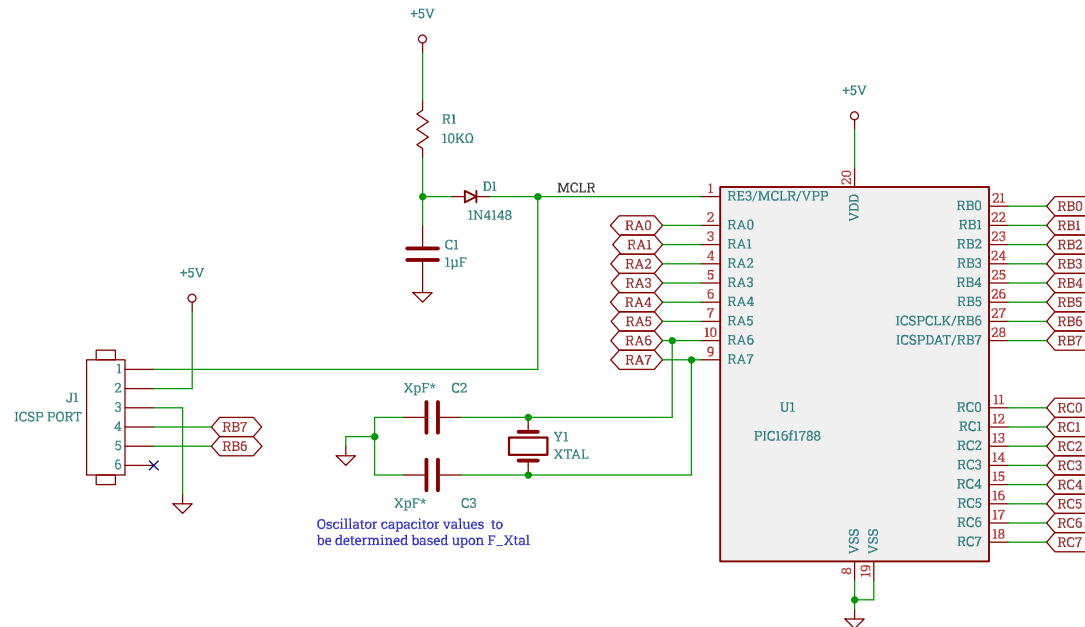

Idaho State
University

Robotics & Communications
Systems Engineering Technology

Idaho State University

Robotics & Communications Systems Engineering Technology
1152 Martin Luther King Jr Blvd.
Pocatello ID 83209

Drawn By: Shane Slack

Title: PIC16F1788_Development Board / Microcontroller


Size: A Date: 2025-03-11

Rev: A

KiCad E.D.A. 8.0.5

Id: 2/6


UART

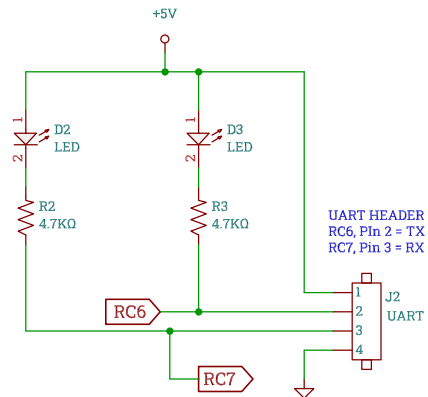


I2C

* For data rates > 200K Baud, bypass the I²C diodes, and decrease pull-up resistor value.

Only solder pull up resistors on the I²C master.

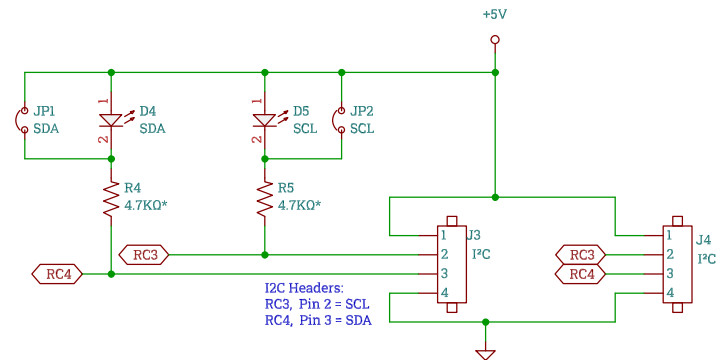


ANALOG INPUT HEADERS

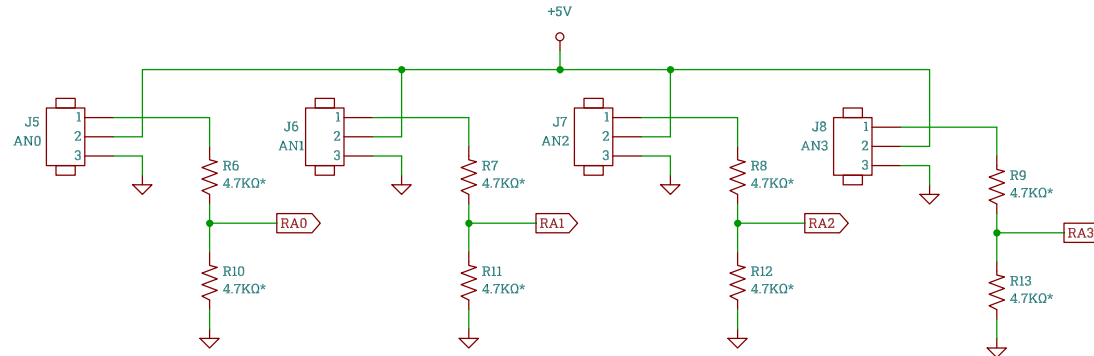



Analog inputs: 4.7KΩ value is just a basic starting value. Adjust input voltage dividers as needed for analog input

I/O PORT BREADBOARD HEADERS

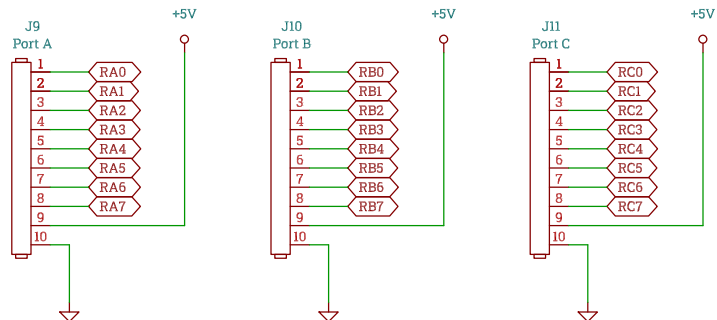

PWM OUTPUT HEADERS

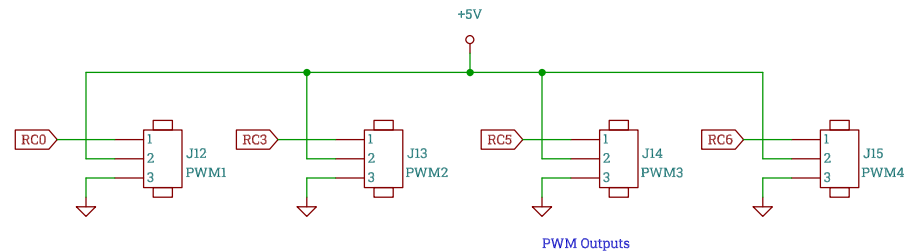

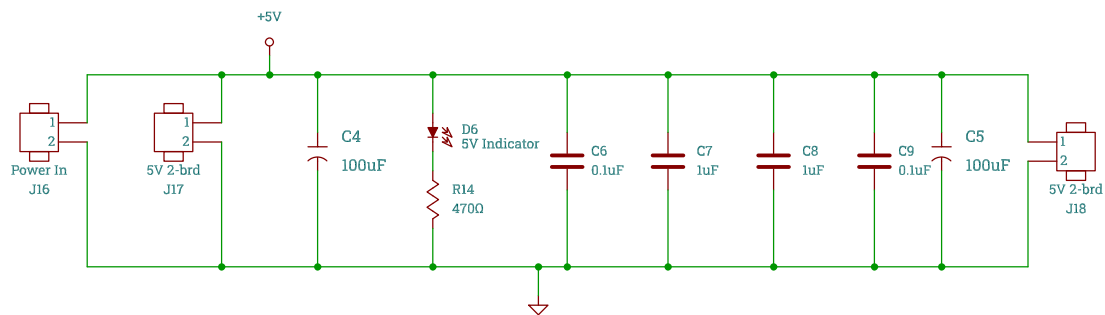

Robotics & Communications
Systems Engineering Technology

Idaho State University

Robotics & Communications Systems Engineering Technology
1152 Martin Luther King Jr Blvd.
Pocatello ID 83209

Drawn By: Shane Slack

Title: PIC16F1788_Development Board / POWER


Size: A

Date: 2025-03-11

Rev: A

KiCad E.D.A. 8.0.5

Id: 5/6

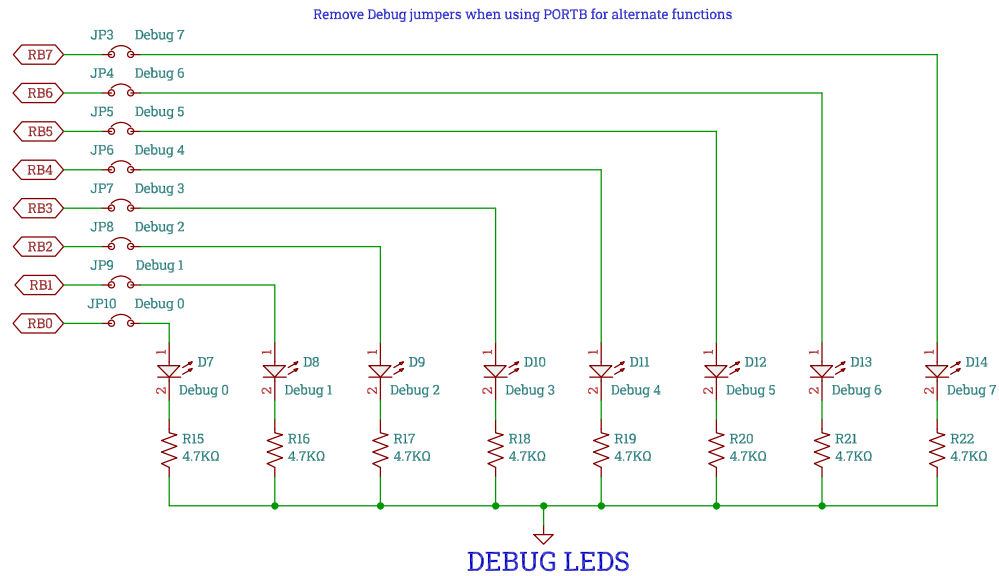

Robotics & Communications
Systems Engineering Technology

Idaho State University

Robotics & Communications Systems Engineering Technology
1152 Martin Luther King Jr Blvd.
Pocatello ID 83209

Drawn By: Shane Slack

Title: PIC16F1788_Development Board / Debug

Size: A Date: 2025-03-11

KiCad E.D.A. 8.0.5

Rev: A

Id: 6/6