



Analog Input




Values are based on a 5V analog sensor. These values decrease a 5V fullscale reading to 3.311V on R7. C7 should be adjusted based upon the recommendation of the analog sensor.

Voltage Regulation & Filter


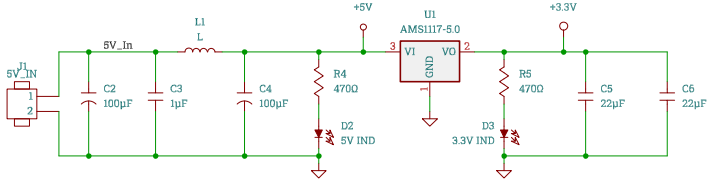


I2C Ports


4.7KΩ I2C Pullup resistors are based on low capacitance lines at low baud rates. See I2C documentation for adjustments to resitor values.

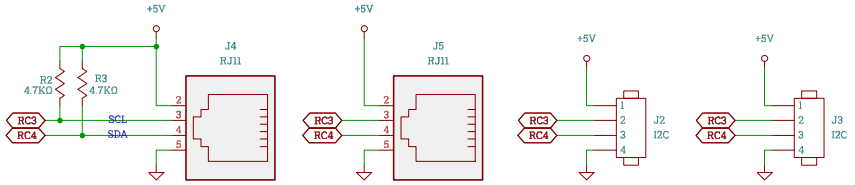

Digital Inputs

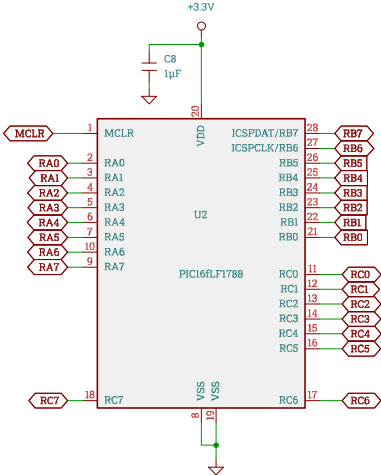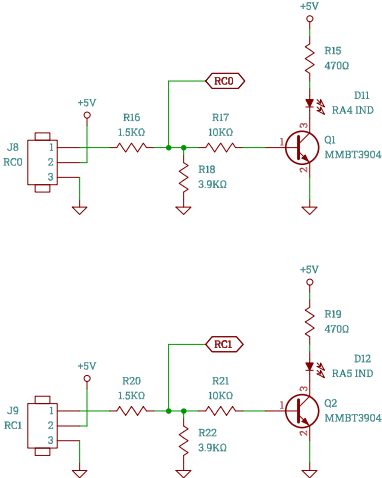


ICSP

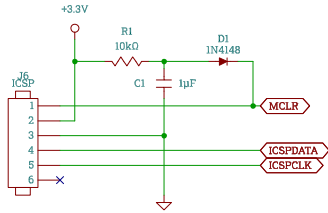


Mounting Holes



Address Select

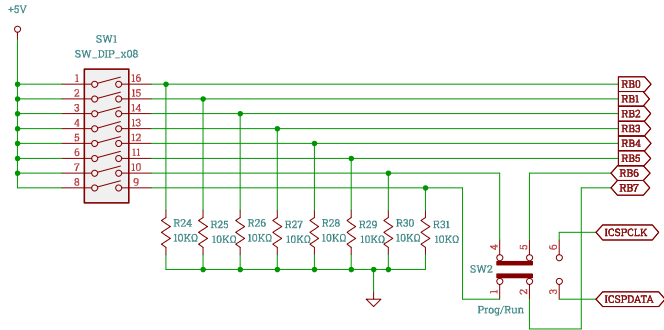

DEBUG LEDs

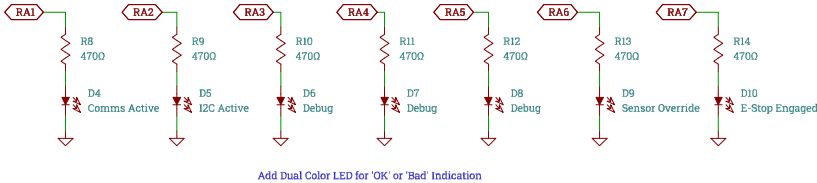

Add Dual Color LED for 'OK' or 'Bad' Indication

USART

