

¹ fff_segmenter: A signal segmentation script for acoustic FFF fabrication data in MATLAB

³ Thiago Glissoi Lopes  ¹, Paulo Monteiro de Carvalho Monson  ¹, Paulo Roberto de Aguiar  ^{1¶}, Reinaldo Götz de Oliveira Junior  ¹, and Pedro Oliveira Conceição Junior  ²

⁶ Department of Electrical Engineering, São Paulo State University, Brazil ² Department of Electrical and Computer Engineering, São Carlos School of Engineering (EESC), University of São Paulo (USP), São Carlos 13566-590, São Paulo, Brazil ¶ Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Editor: ↗

Submitted: 05 September 2023

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](https://creativecommons.org/licenses/by/4.0/)).

⁹ Summary

¹⁰ The Fused Filament Fabrication (FFF) process involves the manufacturing of parts by adding multiple layers of fused thermoplastics in pre-defined printing lines ([Wendt et al., 2017](#)). The monitoring of the FFF process via acoustic signals has successfully detected defects in the printing process ([Liu et al., 2018](#); [Lopes et al., 2022](#); [Wu et al., 2015](#)). Mechanistically, acoustic signals obtained from the FFF process are non-stationary time-series that capture alterations in the acoustic field arising from material deposition ([Lopes et al., 2022](#)). Signal segmentation is a fundamental step in the process monitoring of FFF, as it allows the identification of printing lines and extraction of relevant information for process monitoring and control. However, due to stochastic acoustic interferences arising from the FFF process, accurate manual segmentation may not be possible ([Lopes et al., 2022](#)). `fff_segmenter` is a signal segmentation script written in MATLAB that allows for automatic and accurate segmentation of different printing lines.

²² Statement of need

²³ Automatic

²⁴ Current research on the FFF process utilizes different methods to segment the acoustic signals. However, all of these methods have a manual component, such as the evaluation of printing time for each line through video recordings of the printing process, or manually selecting the printing lines based on amplitude variations in the time domain. These manual segmentation methods pose a serious challenge to adequate process monitoring, since they are time-consuming and prone to errors due to human mistakes ([Lopes, 2021](#); [Lopes et al., 2022](#)). `fff_segmenter` takes a programming approach that allows for the automatic segmentation of the printing lines in an acoustic signal, utilizing the direction control signal of the X and Y step motor axes of the FFF printer, and the signal's sampling frequency. This feature allows for accurate segmentation of the contour and raster printing lines from the acoustic signal data, thus enabling the extraction of relevant information for process monitoring and control. A consequence of this programming approach is that the FFF signal segmentation in `fff_segmenter`, in contrast to other methods that have a manual component, is fully automatic and less prone to errors due to human mistakes. The process operator only needs to input the acoustic signal, the direction control signal of the X and Y step motor axes of the FFF printer, and the signal's sampling frequency. In return, the operator receives the start and end points in the number of samples for each printing line, along with other relevant process information.

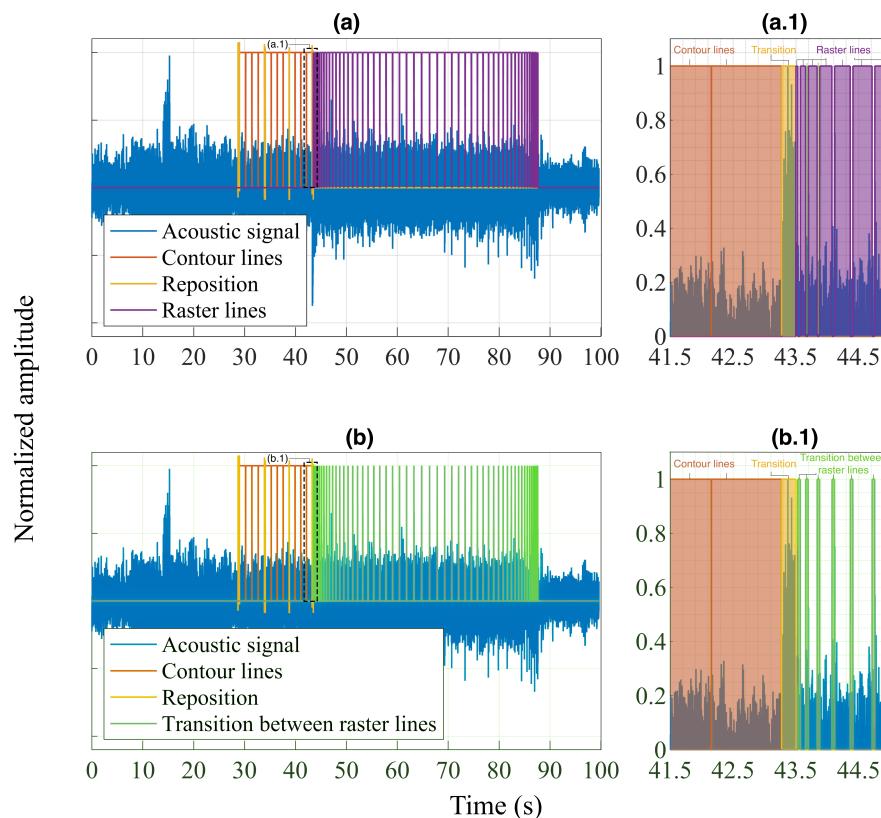


Figure 1: Segmentation example with `fff_segmenter`. (a) signal with raster lines; (b) signal with transition between raster lines

41 **Result orientated**

42 In addition to its automatic feature, `fff_segmenter` is result-oriented. Firstly, the segmentation
43 results can be presented in graphical windows, such as the one presented in Figure 1, that
44 allow for a quick visual inspection of the segmentation results. This feature allows for a quick
45 and accurate evaluation of the script's performance. Secondly, the segmentation results can
46 be autosaved in predefined workspace data formats. These formats allow for the easy import
47 of segmentation results into other MATLAB analyses. Figure 1 shows the segmentation
48 results obtained by applying the `fff_segmenter` script to an acoustic signal. It is possible to
49 observe that the acoustic signal presents many periods that are not of interest for monitoring
50 purposes and, therefore, are not segmented. Further analysis of Figure 1 allows for the
51 identification of contour lines, raster lines, and the transition period between printing patterns.
52 During the transition period between printing patterns, the printer extruder repositions itself
53 without depositing filament. The observation of the transition period analysis window (a.1)
54 in Figure 1(a) confirms an important property of the raster lines printing pattern, which is
55 the fact that the duration of the lines increases, and the raster lines are always separated by
56 a transition period that presents the same duration. These transitions between raster lines,
57 presented in Figure 1(b) analysis window (b.1), are periods of the signal during which there is
58 deposition of filament. Due to being developed with the part's feature in focus, the algorithms
59 in `fff_segmenter` are more direct, maintainable, and, above all, easier to understand with
60 respect to the printer deposition movements.

62 **Scalable**

63 The algorithms in `fff_segmenter` were developed with a focus on cartesian `RepRap`-based
64 FFF printers. This is due to the fact that cartesian `RepRap`-based FFF printers are commonly
65 used for research purposes (Carmo et al., 2020; Liu et al., 2018; Lopes et al., 2022; Wu et
66 al., 2015). Additionally, the segmentation algorithms were developed to segment the contour
67 and raster printing lines of rectangular-shaped monolayer parts. The STL file of the part was
68 sliced to G-code following standard printing parameters provided by the printer manufacturer.
69 The documentation of `fff_segmenter` provides a detailed explanation of the segmentation
70 algorithms and how they were developed to address the particularities of the cartesian `RepRap`-
71 based FFF printer and the rectangular-shaped monolayer part, providing a scalable framework
72 for the segmentation of parts with different shapes and printing parameters.

73 In summary, `fff_segmenter` fulfills the need in FFF process monitoring research for a signal
74 segmentation script that is automatic, result-oriented, and scalable, as well as providing a
75 framework for the community to scale the script to cater to other FFF printers and parts.

76 **Acknowledgements**

77 The authors are thankful to the National Council for Scientific and Technological Development
78 (CNPq) for supporting this research under the Grant # 306774/2021-6, and to the Coordenação
79 de Aperfeiçoamento de Pessoal de Nível Superior – Brasil (CAPES) – Finance Code 001

80 **References**

- 81 Carmo, M. G. F. do, Lopes, T. G., Bombonatti, V. S., Aguiar, P. R., & França, T. V.
82 (2020). Study of the defects and geometric anomalies on monolayer parts obtained
83 by fused deposition modeling process. *Proceedings*, 69, 40. <https://doi.org/10.3390/CGPM2020-07159>
- 85 Liu, J., Hu, Y., Wu, B., & Wang, Y. (2018). An improved fault diagnosis approach for
86 FDM process with acoustic emission. *Journal of Manufacturing Processes*, 35, 570–579.
87 <https://doi.org/10.1016/j.jmapro.2018.08.038>
- 88 Lopes, T. G. (2021). *Detecção e classificação de anomalias durante o processo de manufatura aditiva por fusão e deposição por meio de transdutores piezelétricos e processamento de sinais* (p. 219) [Faculdade de Engenharia de Bauru (FEB) - Universidade Estadual Paulista (UNESP)]. https://repositorio.unesp.br/bitstream/handle/11449/204399/lopes_tg_me_bauru_par.pdf?sequence=5
- 93 Lopes, T. G., Aguiar, P. R., França, T. V., Oliveira Conceição Júnior, P. de, Junior, C.
94 S., & Antonio, Z. R. F. (2022). Time-domain analysis of acoustic emission signals
95 during the first layer manufacturing in FFF process. *Engineering Proceedings*, 27, 83.
96 <https://doi.org/10.3390/ecsa-9-13285>
- 97 Wendt, C., Valerga, A. P., Droste, O., Batista, M., & Marcos, M. (2017). FEM based
98 evaluation of fused layer modelling monolayers in tensile testing. *Procedia Manufacturing*,
99 13, 916–923. <https://doi.org/10.1016/j.promfg.2017.09.160>
- 100 Wu, H., Wang, Y., & Yu, Z. (2015). In situ monitoring of FDM machine condition via
101 acoustic emission. *The International Journal of Advanced Manufacturing Technology*, 84,
102 1483–1495. <https://doi.org/10.1007/s00170-015-7809-4>