Chair of Network Architectures and Services
School of Computation, Information, and Technology
Technical University of Munich

Development of a Framework for Retrieval of Parameters of the Starlink Dish

Final talk for the IDP by

Roberto Castellotti

advised by Leander Seidlitz, Johannes Zirngibl

Monday 27th November, 2023

Chair of Network Architectures and Services
School of Computation, Information, and Technology
Technical University of Munich

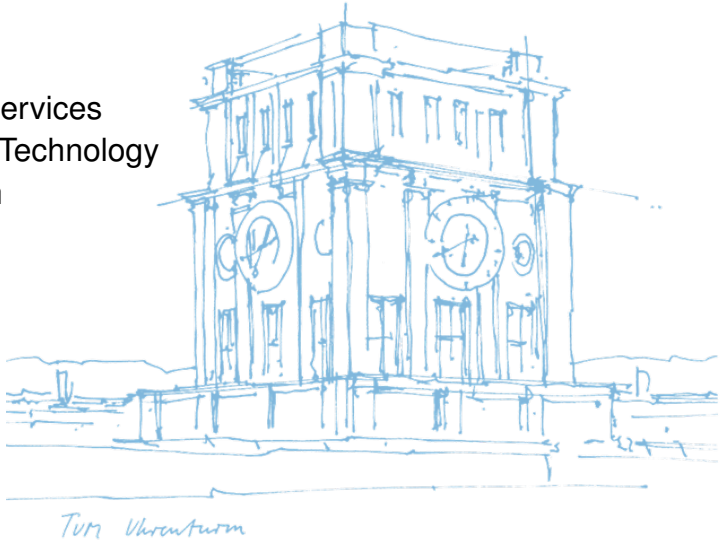

What is Starlink?

- Starlink is a Low Earth Orbiting (LEO) Satellite Constellation
- Brings Internet connection to remote areas
- 4000+ satellites with plans to launch more
- End users have a Dish to connect to satellites in sight
- Performance is higher compared to geostationary satellites (GEOSAT) based connections
- Satellites are orbiting at 550 km in height vs GEOSAT's 35,000 km
- Average latency is 35 ms
- Download bandwidth is $>$ 100 MBps

Starlink 101

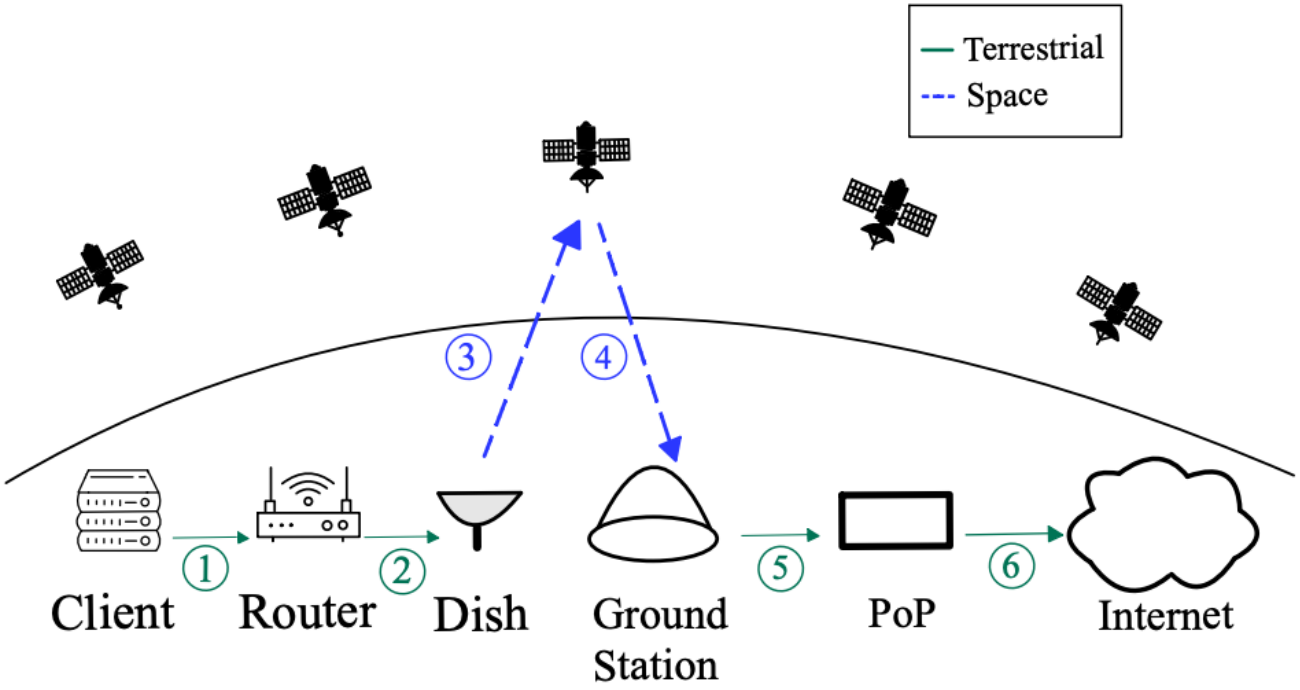

Figure 1: Starlink in a nutshell (ignoring Inter Satellite Links), from [1]

Our Dish

Figure 2: Our Starlink Dish

Problem Statement

should i remove this slide?

- Documenting gRPC API
- Measuring Latency to Point of Presence
- Understanding Routing Decisions
- Visualize Visible Satellites and patterns in their apperance
- Physical Layer Influcences on Performance
- Retrieval of Obstruction Maps
- Satellite Handovers detection based on Obstruction Maps
- Correlation between Satellite Handovers and Bandwidth Drops

Documenting the gRPC API

We started by documenting the gRPC API running on the Dish

- We started by documenting the gRPC[1] API running on the dish
- API is running at`192.168.100.1:9200`
- The dish exposes a gRPC API with "Server Reflection"[2]
- 55 Endpoints are available
  - Majority of them don't work
  - 2 categories of errors: `Uninmplemented`, `PermissionDenied` and a some other errors
- Most interesting working Endpoints [3]:
  - `reboot`
  - `get_status`
  - `get_obstruction_map`

1 `https://grpc.io` is a RPC framework from Google

2 "Runtime construction of requests without having stub information precompiled into the client." `https://github.com/grpc/grpc/blob/master/doc/server-reflection.md`

3 `https://gist.github.com/rcastellotti/e20630366dfeaeada6cc2680f562f6ac`

Measuring Latency to the Point of Presence

- The `get_status` endpoint contains a `pop_ping_latency_ms` field
- We started polling the endpoint to gather latency to the Point of Presence
- Latency is pretty stable, averaging 35 ms with some irregular peaks

Measuring Latency to the Point of Presence

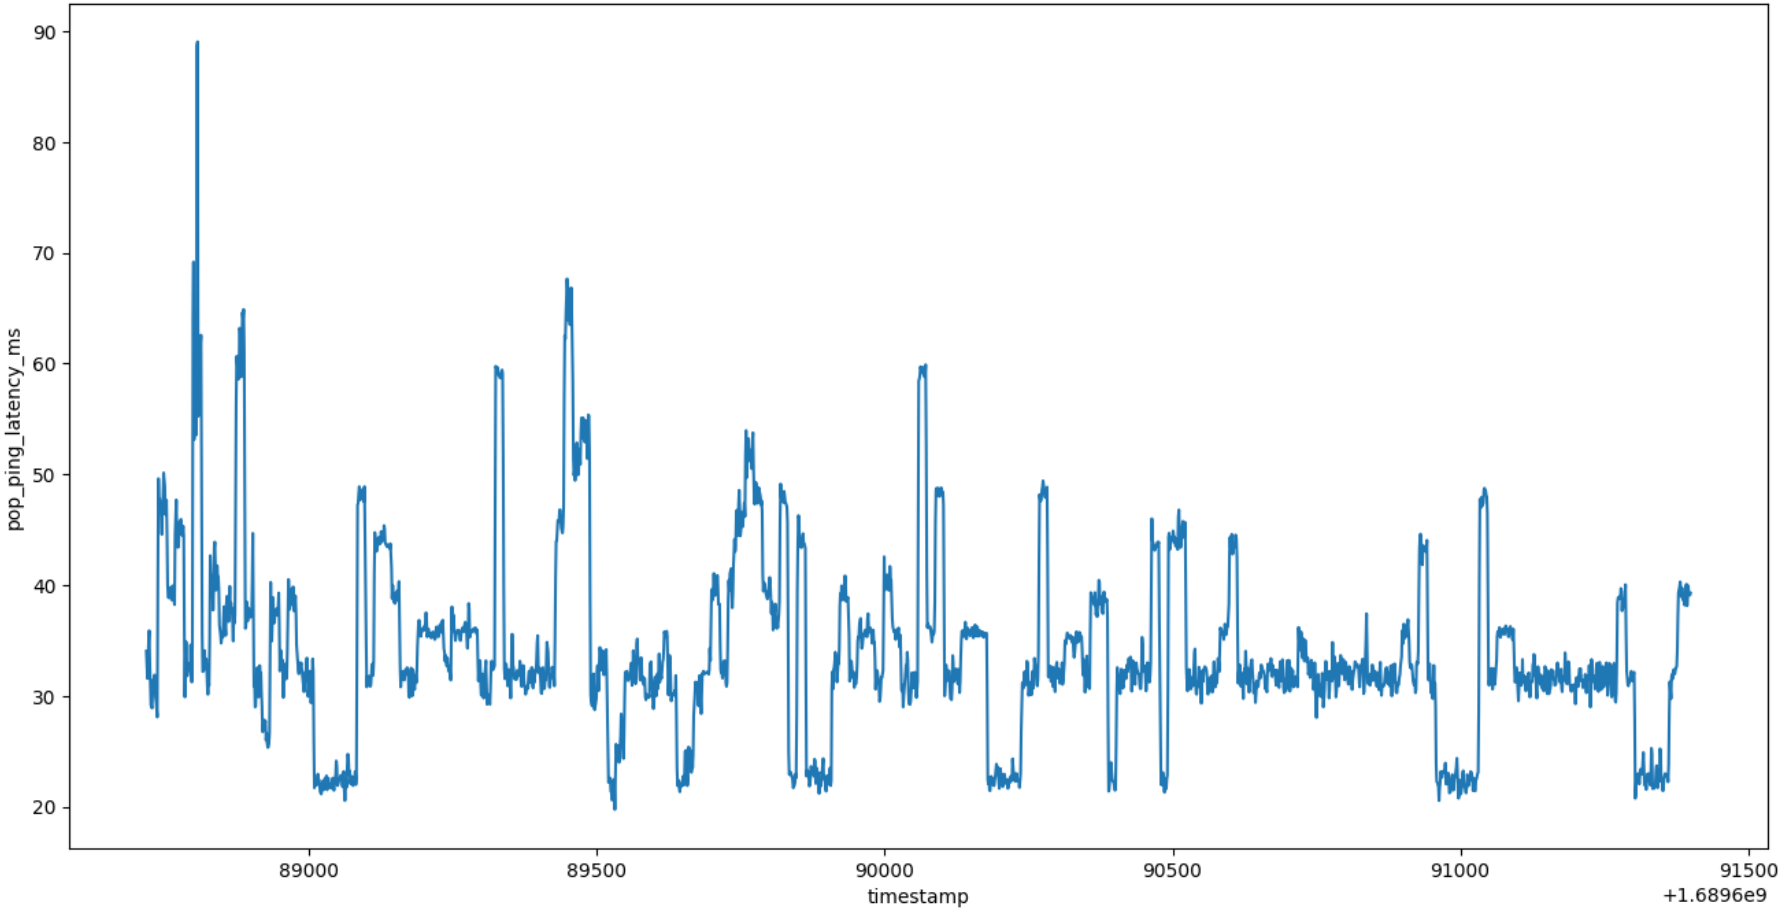

Figure 3: Visualizing latency to the Point of Presence.

Understanding Routing Decisions

- Retrieved IP address blocks from major cloud providers (AWS,Azure,Oracle), position already known [4]
- Chose 5 geographically sparse targets around the globe, i.e for aws:
  - `ap-northeast-2` Asia Pacific (Seoul)
  - `us-east-1` US East (N. Virginia)
  - `ap-south-1` Asia Pacific (Mumbai)
  - `sa-east-1` South America (São Paulo)
  - `me-south-1` Middle East (Bahrain)
- Tracerouted the targets over several days and saved data to later visualize it

[4] does not necessarily mean last hop will be in that area (little infomation around what happens inside datacenters), but a good enough approximation

Chair of Network Architectures and Services
School of Computation, Information, and Technology
Technical University of Munich

Understanding Routing Decisions

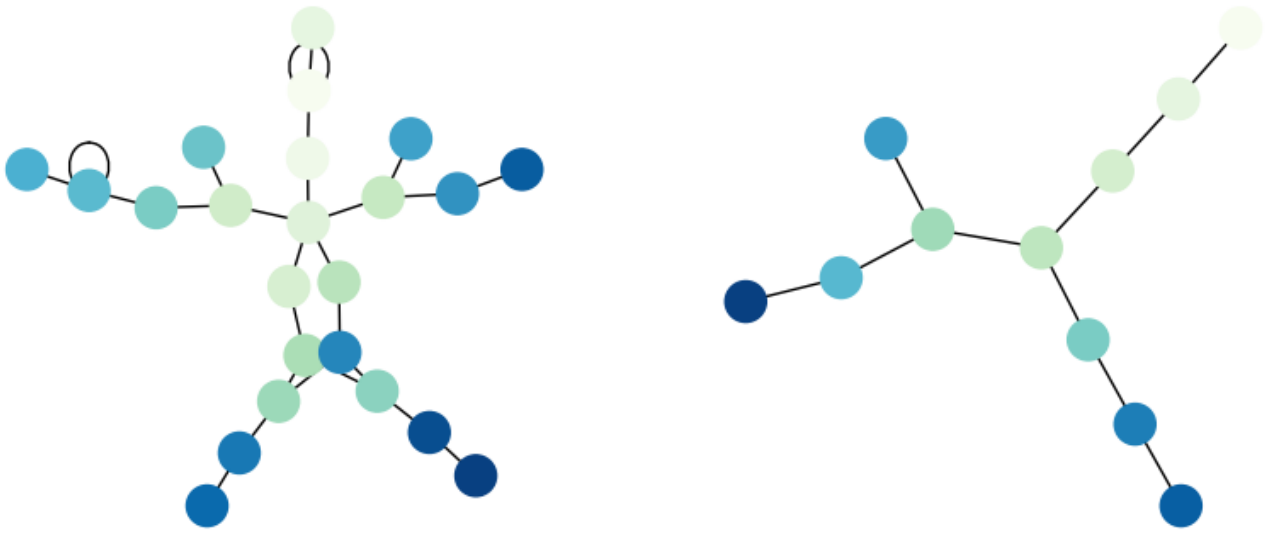

Figure 4: First 7 hops of traceroutes to 5 AWS datacenters using ICMP; left is Starlink, right is cabled connection

Visualize Visible Satellites

- A two-line element set (TLE) is a data format encoding a list of orbital elements of an Earth-orbiting object for a given point in time, the epoch [5]
- Downloaded a list of Starlink's satellites TLEs from celestrak.org
- Wrote a Python script to calculate visible satellites[6]
- Gathered information about satellites position and visualized patterns in Satellite appearances.

[5] https://en.wikipedia.org/wiki/Two-line_element_set

[6] https://gitlab.lrz.de/netintum/teaching/tumi8-theses/idp-castellotti/-/blob/main/common.py?ref_type=heads#L132

Visualizing Patterns in Visible Satellites

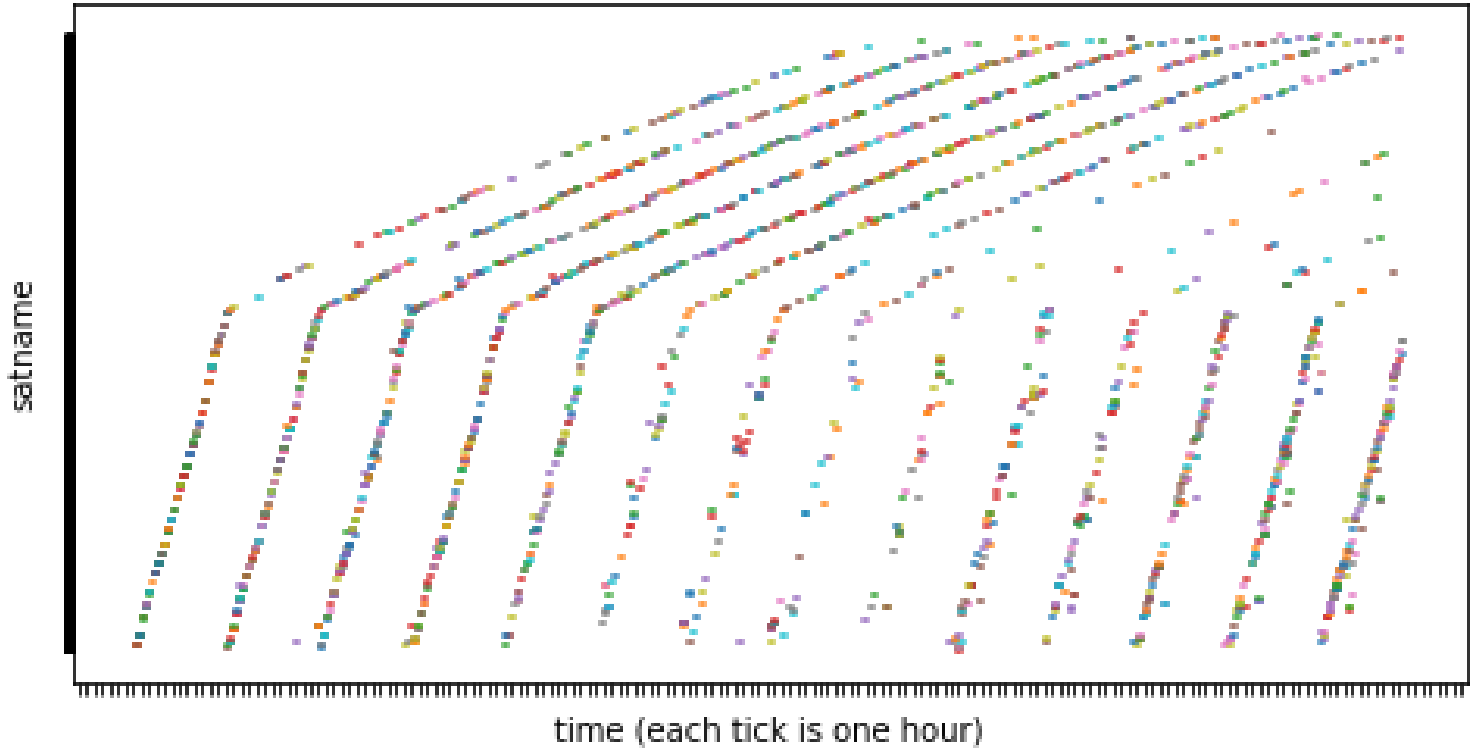

Figure 5: Visualizing patterns in Visible Satellites, we add a dot whenever we see a satellite

Physical Layer Influences on Performance

Does the physical layer have any influences on peformance?

- We wanted to understand whether the physical layer influences RTT
- The Dish may decide to send a packet only when if fills a buffer
- Sent packets to a host we control with iPerf to create traffic on the interface, varying the payload size
- Downloded Debian ISOs from 5 different mirrors (to neutralize upload speed differences)
- Measured RTTs

Physical Layer Influences on Performance

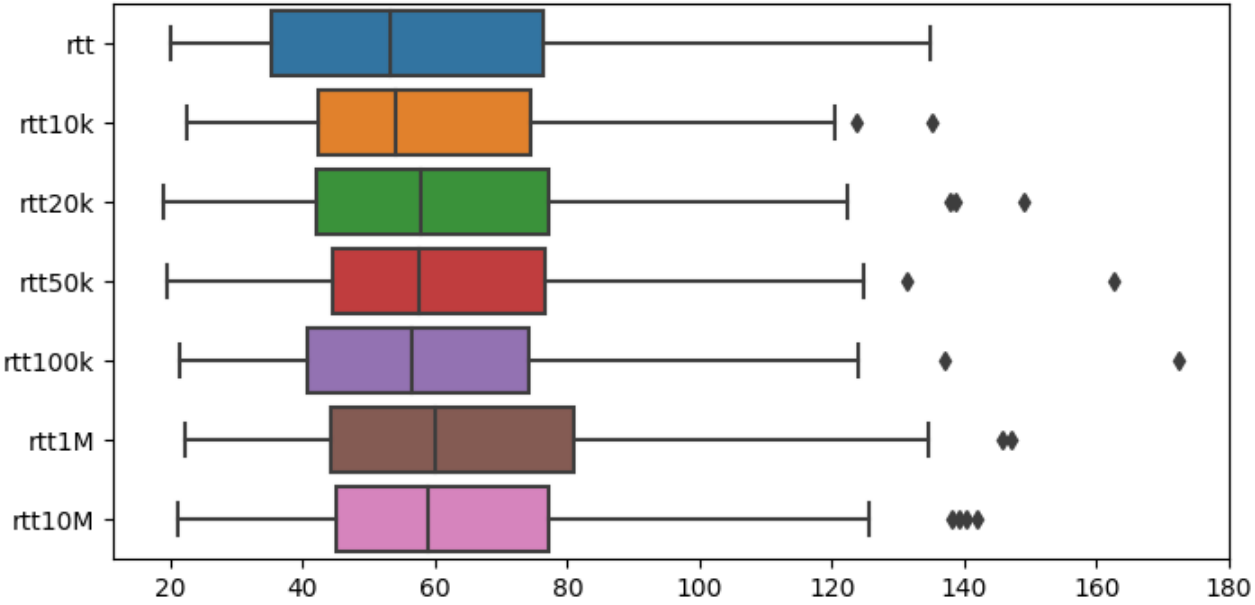

Figure 6: Physical Layer Influences on Performance

the `dish_get_obstruction_map` Endpoint

- An Obstruction Map captures the position where the dish has seen satellites
- Designed to provide a way to report whether the dish positioning is optimal
- Following the approach described by Izhikevich et al. [1] we retrieved maps
  - Reboot the Dish to clear the Obstruction Map (`api.reboot`)
  - Poll the endpoint frequently enough to see satellite traces (`api.get_obstruction_map`)
  - Save the maps to visualize them later

Querying the `dish_get_obstruction_map` Endpoint

```
"apiVersion":"9",
"dishGetObstructionMap":{
    "minElevationDeg":10.0,
    "numCols":123,
    "numRows":123,
    "snr":[-1.0,-1.0,-1.0,-1.0,...,1.0,1.0,-1.0,-1.0]
}
```

- Interpret the `"snr"` field as a matrix, it cointains 15129 (123*123) items
- Export this as images using Matplotlib, we add a timestamp for each map



Figure 7: An Obstruction Map



Figure 8: An Obstruction Map



Figure 9: An Obstruction Map



Figure 10: An Obstruction Map

Detecting Handovers Algoritmically

- Going through visualizations frame by frame is not feasible (1000s of frames)
- Following the map matrix interpetation we assume:
  - "1" means a satellite was detected in that position
  - "-1" means no satellite was detected in that position
- Iterate through matrices two by two to and sum them
- Check if in the sum matrix "0" entry is "near" a "2" entry (inside a 3*3 matrix)
  - If it is "near" no handover was performed
  - If it is in complete different position an handover must have been performed

Chair of Network Architectures and Services
School of Computation, Information, and Technology
Technical University of Munich

Obstruction Maps as Matrices (No Handover)

$$\begin{bmatrix} -1 & 1 & -1 & -1 \\ -1 & -1 & 1 & -1 \\ -1 & -1 & -1 & -1 \\ -1 & -1 & -1 & -1 \end{bmatrix} + \begin{bmatrix} -1 & 1 & -1 & -1 \\ -1 & -1 & 1 & -1 \\ -1 & -1 & -1 & 1 \\ -1 & -1 & -1 & -1 \end{bmatrix} = \begin{bmatrix} -2 & 2 & -2 & -2 \\ -2 & -2 & 2 & -2 \\ -2 & -2 & -2 & 0 \\ -2 & -2 & -2 & -2 \end{bmatrix}$$

Obstruction Maps as Matrices (Handover)

$$\begin{bmatrix} -1 & -1 & 1 & -1 \\ -1 & -1 & -1 & 1 \\ -1 & -1 & -1 & -1 \\ -1 & -1 & -1 & -1 \end{bmatrix} + \begin{bmatrix} -1 & -1 & 1 & -1 \\ -1 & -1 & -1 & 1 \\ -1 & -1 & -1 & -1 \\ 1 & -1 & -1 & -1 \end{bmatrix} = \begin{bmatrix} -2 & -2 & 2 & -2 \\ -2 & -2 & -2 & 2 \\ -2 & -2 & -2 & -2 \\ 0 & -2 & -2 & -2 \end{bmatrix}$$

Correlating Satellite Handovers and Bandwidth Drops

- We now have an algorithm to detect handovers
- We run 2 scripts in parallel:
  - 1st: Retrieves an obstruction map every second
  - 2nd: Gathers Bandwidth data
- We visualize Bandwidth data and Satellite Handovers

Correlating Satellite Handovers and Bandwidth Drops

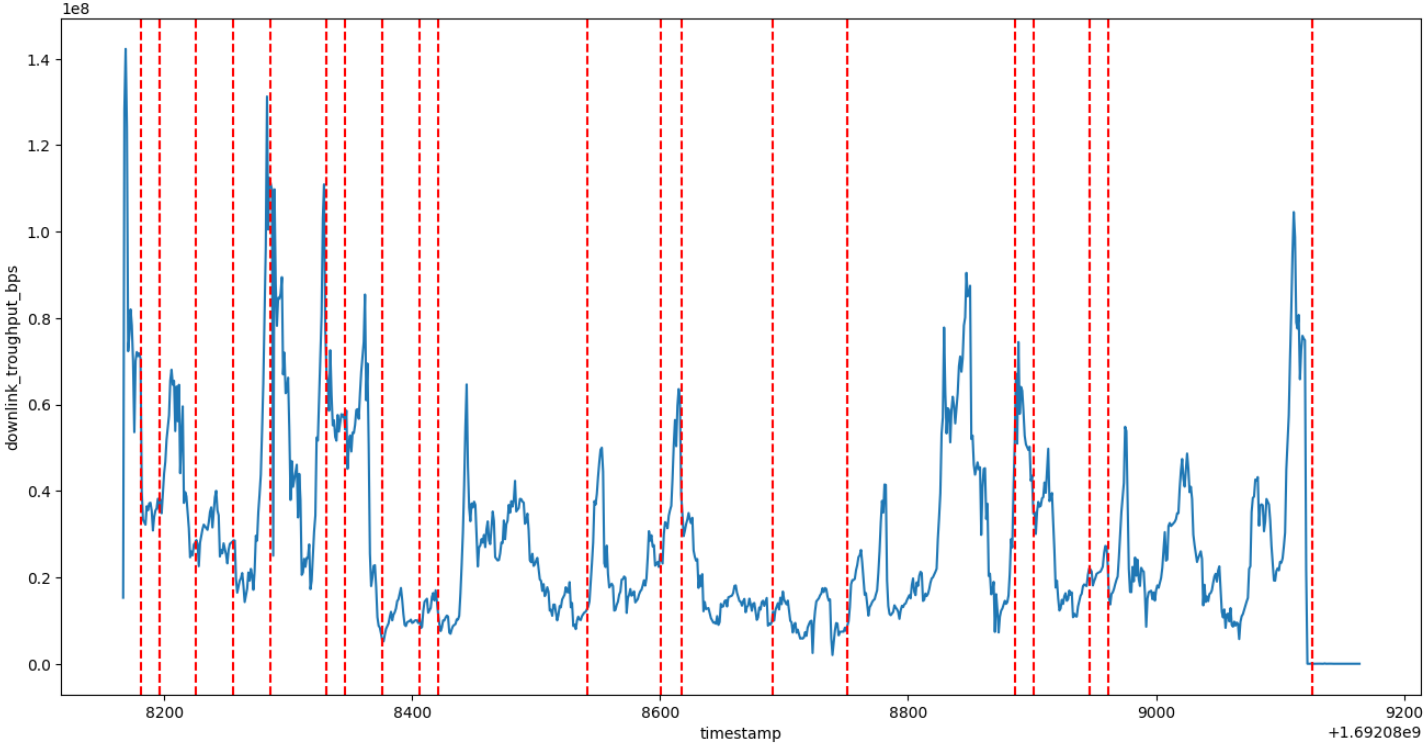

Figure 11: Correlating Satellite Handovers and Bandwidth Drops, blue is bandwith, red vertical dashes are satellite handovers

Similar Technologies

- Eutelsat operates a LEO constellation, Oneweb [7], mainly serving Enterprises and Governments
- Amazon is currently launching its own LEO constellation: Project Kuiper [8], with plans to launch 3,236 satellites, they secured lanches (BlueOrigin)
- The China Aerospace Science and Technology Corporation plans to deploy a 13,000 satellite constellation [9]
- The increasing number of LEO satellites might pose some challenges, mainly:
    - Overall sky brightness increases (impacts astronomical observation)
    - Proliferation of debris

7 https://oneweb.net

8 https://www.aboutamazon.com/what-we-do/devices-services/project-kuiper

9 https://spacenews.com/china-to-begin-constructing-its-own-megaconstellation-later-this-year/

Final Remarks

We conclude that:

- Majority of the Endpoints on the gRPC API are not accessible
- PoP Latency is remarkably stable
- Phyiscal layer has no remarkable influences on Performance
- Bandwidth is sustained consistently, even in the presence of satellite handovers
- Getting insights into inner routing is hard

Bibliography

[1] L. Izhikevich, M. Tran, K. Izhikevich, G. Akiwate, and Z. Durumeric.
Democratizing leo satellite network measurement, 2023.