APOLLO 8	
LMP CHECKLIST	
PART NO.	S/N
SKB 32100029-201	1004

	CDR	CMP	LMP BACKUP COMM CK

```
01:30
        U  U  U
        S  S  S
              ⊥
       ─C─
        Y
        I
           ─A─ ─A─
            S   S
            C   C
02:00
       ─P─ ─P─ ─P─
        R   R   R
        E   E   E
```

SCS ATT REF
COMP CK

BLOCK &
TLI UPDATE

TLI PREP

EMS ΔV TEST
GO/NO GO FOR PRYO
ARM & TLI

GDC ALIGN &
DRIFT CK

```
        C  C
        R  R
        O  O
02:30
              G
              W
              M
        H  H  H
        A  A  A
        W  W  W
03:00
```

108.2° 90.2° 72.2°

P47 - BURN ATT CK

TLI

SECO-S-IVB
INERTIAL

Basic Date Nov. 6, 1968
Changed Dec. 4, 1968

GM 103

POST INSERTION CHECKLIST

1 MN BUS TIES (both) - OFF (verify)
   FLT RCDR - OFF (verify)
   PNL 278 cb 1&2 - open

2 CMP to LEB for MN REG ck
BDA LOS

3 REMOVE HELMETS & GLOVES

4 SEC RAD LEAK CK
      Monitor Sec ACCUM QTY while CMP sets SEC GLY
CYI AOS to RAD vlv to NORMAL 30 sec then back to
      BYPASS

5 ECS POST INSERTION CONFIG (with CDR)
+00:20:00
      GLY RSVR BYPASS vlv - OPEN (CCW)
      GLY RSVR OUT vlv   CLOSE (CW)
      GLY RSVR IN vlv - CLOSE (CW)
      ECS RAD FLOW CONT - PWR
      PRIM GLY TO RAD vlv - NORMAL (PUSH)
      ECS RAD HTR - PRIM 1
         ECS RAD TEMP PRIM OUT below PRIM IN
            If outlet temp above INLET TEMP
            *PRIM GLY TO RAD vlv BYPASS   *
            *   (pull) Recheck in 5 min. *
      ECS RAD tb - GRAY
      GLY EVAP TEMP IN -AUTO

CYI LOS

SYS VERIF & MONITORING

1 EPS Per Verif #1, 2, 3, 4, ~~5 16 req'd~~, pg S-3

2 ECS Monit Ck #1+, pg S-5

LMP INSERT CKS

SPS Monit Ck, pg S-1

ECS Redund Comp Ck #2, pg S-6

FC Purge Ck
    H2/02 PURGE (6) - ON (MON)
    Observe flow rate inc
    Reset MA (as req'd)
    H2 PURGE LINE HTR - OFF

TAN AOS (V)
(00:38:36)

TAN LOS
(00:42:13)

CRO AOS
(00:52:11)

CRO LOS
(00:58:01) S-Bd VOL-UP

HSK AOS (S)
(00:54:29)

HSK LOS
(01:05:32) S-Bd VOL-DN

6   BACKUP COMM Ck
+01:20:00
    Check cb 17 &19 Pnl 225 - close
US AOS S-Bd XPNDR - OFF (4 sec) - PRIM
(01:28:13) PWR PMP - AUX
    S-Bd AUX - DN VOICE BU
    UP TLM DATA - UP VOICE BU
    S-Bd VOL - UP
    INITIAL CONTACT ON VHF A

Basic Date — Nov. 6, 1968
Changed — Dec. 4, 1968

Basic Date — Nov. 6, 1968
Changed — Dec. 4, 1968

SM 103

SM 103

RECEIVE GO FOR BU COMM CK ON VHF A
VHF VOL - DN
PERF BU COMM CK
VHF VOL - UP
S-Bd Aux - OFF
UP TLM DATA - DATA
PWR PMP - NORM
VOICE CK WITH MCCH (VHF VOL UP/DN)

US LOS
(01:42:47)

CYI AOS
(01:50:01)

CYI LOS
(01:55:29)

TAN AOS (V)
(02:09:06)

TLI

X	•	•	X	•	•		TB6p (Lt out)
X	X	X	X	X	X		R
X	X	X	X	X	X		P
X	X	X	X	X	X		Y
X	X	X •	X	X	X •		BT
	•		•		•		ΔVC'
+			+				VI
X	X	X	X	X	X		R SEP
X	X	X	X	X	X		P SEP
X	X	X	X	X	X		Y SEP

SYSTEMS MANAGEMENT

LMP INSERT CKS

TAN LOS
(_____)

CRO AOS
(_____)

CRO LOS
(_____)

RED AOS
(____:____:____)

RED LOS
(____:____:____)

HAW AOS
(_____)

GET SEP ____:____:____

TLI ____:____:____

CONDUCT SIVB PHOTOGRAPHY

1   16/18/C-EX, 1/250, f11/6fps
     1 Mag

2   2/80/C, 1/250, spot
     10 Exp

Start Battery Charge (BATT B) (S-4)

SYSTEMS MANAGEMENT

Basic Date Nov. 6, 1968
Changed Dec. 4, 1968

Basic Date Nov. 6, 1968
Changed

CSM 103

CSM 103

SYSTEMS MANAGEMENT TABLE OF CONTENTS

LMP INSERT CKS

SYSTEMS MANAGEMNT

Basic Date — Nov. 6, 196_ Changed — 103

Basic Date Nov. 6, 1968 Changed Dec. 4, 19__ CSM 103

PROPULSION SYSTEM

1   SPS MONITORING CKS

SPS PRPLNT TK TEMP - +45° to +75°F

     * If <45°F-SPS LINE HTR-A *

SPS PRPLNT TK PRESS: He - 3900 psia max.

                       N2A & B - 2900 psia max.

SPS PRESS IND sw - He

FUEL & OXID PRESS - 170-195 psia

SPS ENG INJ VLVS (4) - CLOSE

SPS OX, FUEL & UNBAL QTY - record

OXID FLOW VLV - PRIM

SPS He VLV (both) - AUTO

SPS He VLV tb (both) - bp

2   ♦SM RCS MONITORING CK

SM RCS SEC PRPLNT tb (4) - bp (If PRIM in use)

SM RCS He 1 & 2 tb (8) - gray

SM RCS PRIM PRPLNT tb - gray (If PRIM in use)

RCS IND sw - SM A, B, C, D

   PKG TEMP - 105-195°F

   He PRESS - record

   MANF PRESS - 178-192 psig

   He TK TEMP - record

   PRPLNT QTY - record

When PRPLNT QTY is 43%:   (He PRESS tbd psig)

   SM RCS SEC PRPLNT A(B,C,D) - ON

   SEC PRPLNT A(B,C,D) tb - gray

   PRIM PRPLNT A(B,C,D) - OFF

   PRIM PRPLNT A(B,C,D) tb - bp

3   ♦CM RCS MONITORING CK

CM RCS PRPLNT tb (both) - bp

RCS IND sw - CM 1,2

   He TEMP - 60-90°F

   He PRESS - 4000-4450 psia

   FUEL & OXID PRESS - 25-125 psia

After CM RCS Activation:

   He PRESS-3700-4150 psia

   FUEL & OXID PRESS - 285-302 psia

   CM RCS HTRS - OFF

EPS PERIODIC VERIFICATION AND TESTS

1 **Cryogenic Pressure - Quantity Check**
   H2 PRESS (both) - 225-260 psia
   SURGE TK PRESS - 865-935 psia
   O2 PRESS (both) - 865-935 psia
   H2 QTY (both) - record
   O2 QTY (both) - record
   CRYO FANS - OFF; ON as req'd

   (handwritten) 80-100 % - 4 hr
   (handwritten) 50-80 % - 8 hr
   (handwritten) * C&W LT -out before *
   (handwritten) *   continuing *

2 **FC Power Plant Check**
   FC IND sw - 1,2,3
      H2 FLOW - 0.03-0.15 lb/hr
      O2 FLOW - 0.25-1.2 lb/hr
      MOD SKIN TEMP - 390-450°F
      MOD COND EXH TEMP - 150-175° F
     FC TB (2) - gray
   FC RAD TB (3) - gray
   FC REACS (3) - gray
   FC REACS & RAD cb (6) - out all others in (verify)

3 **DC Voltage-Amperage Check**
   MN BUS TIE (both) - OFF (verify)
   FC MNA TB - 1 & 2 gray, 3 BP
   FC MNB TB - 1 BP, 2 & 3 gray
   FC 1, 2, & 3 (RECORD AMPS)
   MAIN BUS A, B, (26.5-31 vdc-Record)
   BAT BUS A, B, & BAT C (34-38 vdc <3 amp)
   PYRO BAT A, B (37 VDC)
   DC IND - MAIN BUS B
   SYS TEST 4B (BAT RLY BUS - 3.7-4.1 vdc)
   SYS TEST 4A (BAT COMPT PRESS) - <1.5 vdc
                 (NA UNTIL 1st VENT)
             If >1.5: BAT VENT VLV -
             VENT (to 0) then CLOSED

   (handwritten) (If PYRO BAT ck desired:
   (handwritten) PYRO A/B SEQ A/B cb (both) - close
   (handwritten) PYRO A/B SEQ A/B cb (both) - open

4 **AC VOLTS - 115 ± 2 all PHASES**

(tab labels, left margin) LMP INSERT CKS · SYSTEMS MANAGEMNT

(handwritten on rings) Nov. 6, 1968   Basic Date
Dec. 4, 1968   Changed
SM 103

1

LMP INSERT CKS

SYSTEMS MANAGEMNT

5 **Battery Charging BAT A (B)**
MAIN BUS TIE A/C (B/C) - OFF
BAT BUS A & B PYRO BUS TIE cb - open (verify)
BAT C BAT BUS A & B cb - open
BAT RLY BUS BAT A(B) cb - open
DC IND sw - BAT CHARGER
BAT CHARGE - A(B,C)
  DC VOLTS - 37.5-40 vdc
  DC AMPS - 2.0-0.4 amps
BAT CHARGE - OFF at 0.4 amps or 100% re-charge
BAT RLY BUS BAT A(B) cb - closed
SYS TEST 4A (BAT VENT <1.5)
    If >1.5: BAT VENT VLV -
    VENT (to~0) then CLOSED

6 **Fuel Cell Power Plant Purging**

A. O2 PURGING
   FC IND sw - 1(2,3)
   FC PURGE 0 1(2,3) - 02 (2 min.)
   FC FLOW-02 Flow incr 0.6 lb/hr
   M/A FC 1(2,3) - On/Reset
   FC PURGE - 1(2,3) - OFF

B. H2 PURGING
   H2 PURGE LINE HTR - ON (20 min prior)
   FC IND sw - 1(2,3)
   FC PURGE - 1(2,3) - H2 (1 min, 20 sec)
   FC H2 FLOW - Flow incr 0.67 lb/hr
   M/A FC 1(2,3) - On/Reset
   FC PURGE - 1(2,3) - OFF
   H2 PURGE LINE HTR - OFF

7 **H2 or O2 Quantity Balance Correction**
ON LOW Tank, H2 or O2 HTRS 1(2) - OFF,
  THEN AUTO, WHEN BALANCED

Basic Date Nov. 6, 1968 Changed Dec. 4, 1968 SM 103

Basic Date Nov. 6, 1968 Changed Dec. 4, 1968 CSM 103

ECS PERIODIC VERIFICATION

1 **ECS MONITORING CHECK**
+CABIN ΔP - -1 to -3.5 in H2O
+O2 FLOW - 0.2-0.45 lb/hr (after changeover)
 O2 SURGE TANK PRESS - 865-935 psia
 PRIM RAD tb - gray
       *If PRIM RAD tb - 2   *
      * ECS RAD FLOW AUTO CONT - 1 until *
      * tb gray, then AUTO   *
 ECS RAD TEMP PRIM IN - 67-97° F
 ECS RAD TEMP PRIM OUT - -20° to +63°F (-20° to
                        97°F for lunar orb)

 REPRESS O2 >865 psia
+GLY EVAP PRIM TEMP OUT - 40-50.5°F
+GLY EVAP PRIM STEAM PRESS
  .1-.15 boiling, > .16 not boiling
+PRIM GLY DISCH PRESS - 40-52 psig
+SUIT TEMP - 45-55°F
+CABIN TEMP - 70-80°F
+SUIT PRESS/CABIN PRESS - 4.8-5.2 psia(14.7 for launch)
+PART PRESS CO2 < 7.6 mm Hg
+SUIT COMP ΔP - 0.3-0.4 psid
+PRIM GLY ACCUM QTY 30-70% (expect 20-50% at insert)
    *If <30% - PRIM ACCUM FILL vlv - *
    * ON (until 40-55%)   *
+POT H2O QTY - 10-100%
+WASTE H2O QTY - 25-85%
    *If >85% - Dump, pg S-15

2 **ECS PRE-TLI/LOI REDUNDANT COMPONENT CK**
    Suit Compressor
      SUIT COMPR (both) - sw to other compr
      SUIT COMPR ΔP ind - 0.3-0.4 psid
    Main O2 Regulators
      MAIN REG B vlv - close
      EMER CABIN PRESS vlv - 1
      PUSH TO TEST PB-PUSH (O2 FLOW INC)
      O2 press - 90-110 psig (from MSFN if avail)
      MAIN REG B vlv - open
      MAIN REG A vlv - close
      EMER CABIN PRESS vlv - 2
      PUSH TO TEST PB - PUSH (O2 FLOW INC)
      O2 press - 90-110 psig (from MSFN if avail)
      MAIN REG A vlv - open
      EMER CABIN PRESS vlv - BOTH (OFF if suited)
    Secondary Glycol Loop
      Open cool atten panel (If req'd)
      EVAP H2O CONT SEC vlv - AUTO
      ECS IND sw - SEC
      SEC COOL LOOP PUMP - AC1
        GLY DISCH SEC PRESS - 39-51 psig
        ACCUM SEC QTY IND - 30-55%
      SEC COOL LOOP EVAP - EVAP
      SEC EVAP STEAM PRESS .1-.15 boiling
                  >.16 not boiling
      After 5 min
        SEC EVAP TEMP OUT - 40-50.5°F
      SEC COOL LOOP EVAP - RESET for 58 sec minimum,
                  then off (ctr)
      ECS IND sw - PRIM
      SEC COOL LOOP PUMP - off (ctr)
      EVAP H2O CONT SEC vlv - OFF

3 **ECS PERIODIC REDUNDANT COMPONENT CK**
    Main O2 Regulators
      MAIN REG B vlv - close
      EMER CABIN PRESS vlv - 1
      PUSH TO TEST PB-PUSH (O2 FLOW INC)
      O2 press - 90-110 psig (from MSFN if avail)
      MAIN REG B vlv - open
      MAIN REG A vlv - close
      EMER CABIN PRESS vlv - 2
      PUSH TO TEST PB - PUSH (O2 FLOW INC)
      O2 press - 90-110 psig (from MSFN if avail)
      MAIN REG A vlv - open
      EMER CABIN PRESS vlv - BOTH (OFF if suited)
    Secondary Glycol Loop
      Open cool atten panel (If req'd)
      EVAP H2O CONT SEC vlv - AUTO
      ECS IND sw - SEC
      SEC COOL LOOP - AC 1 (AC 2)
        GLY DISCH SEC PRESS - 39-51 psig
        ACCUM SEC QTY IND - 30-55%
      SEC COOL LOOP EVAP - EVAP
      SEC EVAP STEAM PRESS .1-.15 boiling,
                  >.16 not boiling
    After 5 min
      SEC EVAP TEMP OUT - 40-50.5F
    SEC COOL LOOP EVAP - RESET for 58 sec minimum,
                  then off (ctr)
    ECS IND sw - PRIM
    SEC COOL LOOP PUMP - off (ctr)
    EVAP H2O CONT SEC vlv - OFF

ECS SPECIAL PROCEDURES

1 GLYCOL ACCUMULATOR REFILL (IF <30%)
PRIM ACCUM FILL vlv - ON
GLY ACCUM PRIM QTY - 40-55%
PRIM ACCUM FILL vlv - OFF
     IF OVER FILL
          GLYCOL RESVR INLET - OPEN (MOM)

2 CO2 ABSORBER FILTER REPLACEMENT
CO2 CSTR DIVERT vlv - A(B)
BLEED vlv - PRESS
COVER LATCHING HANDLE - UNLOCK
REPLACE FILTER
COVER LATCHING HANDLE - LOCK
SHIM STOWAGE - B5 & B6

3 DEBRIS SCREEN CHECK
Check cabin ht exch inlet screen
Check SUIT RET AIR vlv screen
  CABIN FANS (both) - OFF
  SUIT RET AIR vlv - CLOSE (PUSH)
  Clean screens
  SUIT RET AIR vlv - OPEN (PULL)
  CABIN FANS (both) - on

4 POTABLE WATER CHLORINATION
Unstow chlorination unit
Remove chlor port cap
Attach needle assembly to injection port
Insert chlorine ampoule into casing
Connect knob assembly & rotate (CW) until
     piston contacts ampoule
Install ampoule assembly on needle assembly
     (push & turn CW)
Rotate knob (CW) until ampoule is empty
     (3 turns for half empty if H2O qty <50%)
Disconnect ampoule assembly from needle assembly
Rotate knob CCW & stow used ampoule
Repeat above steps with buffer ampoule
Replace chlor port cap   *POT H2O - OPEN*
Stow chlorination unit   *wait 10 min.*

Basic Date: Nov. 6, 1968
Changed Dec. 4, 1968
Changed Dec. 4, 196_

Do not drink for 30 min

SM 103

PGA MODE CHANGES   *Remove 1 ampoule of H2O*

1 DOFFING PGA
EMER CABIN PRESS vlv - BOTH
SUIT RET AIR vlv _ OPEN (PULL)
Install hose screen on return hose
PWR - OFF
SUIT PWR - OFF for disconnect
Audio CONT - NORM
Don lt wt hdsets
SUIT PWR - ON
PWR - AUDIO/TONE
SUIT FLOW vlv - CABIN FLOW (unsuited)

2 DONNING PGA
SUIT PWR - OFF for comm cable connect
PWR - OFF
AUDIO CONT - NORM
Connect supply and return hoses to PGA
Connect COMM control head to PGA
SUIT FLOW vlv - FULL FLOW (suited)
SUIT RET AIR vlv - CLOSED (PUSH)
EMERG CABIN PRESS vlv - OFF

3 PARTIAL SUIT CKLIST
EMER CAB PRESS vlv - BOTH
SUIT CKT RET vlv - OPEN (Pull)
Reverse O2 umbilicals

4 DISCONNECTING COMM UMBILICAL
Before disconnecting umbilical from head set:
    SUIT PWR - OFF
    POWER - OFF
    AUDIO CONT - NORM

5 SUIT CKT INTEGRITY CK
DIRECT O2 vlv - CLOSE (CW)
SUIT PRESS - 4.8-5.2 psia
O2 FLOW - 0.2-0.4 lb/hr
SUIT TEST vlv - PRESS
  O2 FLOW - 1.0 lb/hr (pegged)
  O2 FLOW HI lt - ON
  M/A - ON, Reset
  SUIT PRESS - 8.9-9.7 psia
  PGA PRESS (3) - 4.1-4.5 psig
O2 DEMAND REG vlv - OFF
  O2 FLOW - 0.2 lb/hr (pegged)
  O2 FLOW HI lt - OFF
  PGA PRESS (3) - 0.5 psi/min decay
O2 DEMAND REG vlv - Both (O2 flow inc)
SUIT TEST vlv - DEPRESS
  O2 FLOW - 0.2-0.4 lb/hr
  SUIT PRESS - slightly > CAB PRESS
SUIT TEST vlv - OFF

6 PGA INTEGRITY CK
DIRECT O2 vlv - CLOSE (CW)
SUIT PRESS - 4.8-5.2 psia
O2 FLOW - 0.2-0.4 lb/hr
SUIT TEST vlv - PRESS
  O2 FLOW - 1.0 lb/hr (pegged)
  O2 FLOW HI lt - ON
  M/A - ON, Reset
  SUIT PRESS - 8.9-9.7 psia
  PGA PRESS (3) - 4.1-4.5 psig
SUIT FLOW vlv - OFF
   MONITOR For 0.5 psi/min decay
SUIT FLOW vlv - SUIT FULL FLOW
SUIT TEST vlv - DEPRESS
  O2 FLOW HI lt - OFF
  O2 FLOW - 0.2-0.4 lb/hr
  SUIT PRESS - slightly > CAB PRESS
SUIT TEST vlv - OFF

CABIN ATMOS MODE CHANGES

1 CM PRESSURE DUMP
EMER CABIN PRESS vlv - OFF (verify)
CAB REPRESS vlv - OFF (verify)
SUIT RTN AIR vlv - CLOSED (verify)
CABIN FANS (both) - OFF
DIR O2 vlv - CLOSE (CW)
CAB PRESS REL vlv (RH) - DUMP (latch off)
CABIN PRESS - 3.0-3.25 psia
  CAB PRESS REL vlv (RH) - BOOST ENTRY
  O2 FLOW - 0.24 lb/hr
  SUIT PRESS - 3.5-4.0 psia
CAB PRESS REL vlv - (RH) - DUMP
  CABIN PRESS - 0.0 psia
CAB PRESS REL vlv (both) - NORMAL (latch on)

2 CABIN REPRESS (NORM, 30 min)
CAB PRESS REL vlv (both) - NORMAL (latch on)
MONITOR SURGE TANK PRESS
PLSS vlv - FILL
REPRESS O2 vlv - OPEN
AT 150 psia ON SURGE TANK:
  PLSS vlv - OFF
  CABIN REPRESS vlv - ADJUST TO 150 psia on
                           SURGE TK

AT ZERO psia on EMERG O2 GAUGE:
  REPRESS O2 vlv - CLOSE
CAB REPRESS vlv - OPEN (CW)
WHEN CABIN PRESS = 4.7-5.3
  CAB FAN (both) - ON
  O2 PRESS ind - TANK 1
  CAB REPRESS - CLOSE (CW)

3   CABIN REPRESS (ALT, 52 min)
     CAB PRESS REL vlv (both) - NORMAL (Safety latch on)
     EMER CAB PRESS vlv - BOTH
     CAB REPRESS vlv - OPEN (CW)
     MONITOR SURGE TANK PRESS
     AT 150 psia on SURGE TANK:
       EMER CAB PRESS vlv - OFF
       CAB REPRESS vlv - Adj to 150 psia on SURGE TANK
     WHEN CAB PRESS > 4.7
       CAB FAN (both) - ON
       02 PRESS IND - TANK ;
       CAB REPRESS vlv - CLOSE (CCW)

4   CM 02 SUPPLY REFILL   *after cabin dump*
     SURGE TANK PRESS > 500 psia
     CAB REPRESS vlv - CLOSE (CCW)
     REPRESS 02 vlv - CLOSE
     PLSS vlv - FILL
       SURGE TANK PRESS - 865-935 psia
     02 PRESS IND - TANK 1
     PLSS vlv - OFF

5   O2 TOP OFF for ENTRY

     SURGE TANK vlv - ON (verify)
     REPRESS O2 vlv - ON until:

        TANK PRESS = CRYO PRESS - 50
     REPRESS O2 vlv - OFF

Basic Date Nov. 6, 1968
Changed   Changed

CSM 103   CSM 103

WASTE MANAGEMENT PROCEDURES

1   VERIFICATION OF CLEAR URINE VENT LINE
    URINE DUMP HTR - ON (verify)
        Waste stowage vent vlv-open 5 sec-then closed
        Batt vent vlv - open
        Systems test ind 4A -
        Monitor Batt Manif Press 0
        Batt Vent vlv - Close
        SYS TEST - 4B if desired
        Pressure not 0 or Decay to 0 -Line not clear-
        Use Side Hatch Water/Urine Dump Procedure
                                       pg S-15

2   PGA URINE COLL BAG DUMP
        Connect Urine transfer hose & filter
          to urine feces QD.
        Connect urine transfer hose to thigh OP
        Waste mgt drain vlv - dump until bag empty
        Disconnect urine transfer hose from PGA
        Replace cap on PGA
        Install vacuum fit in to UT Hose
        Purge dump line 30 sec
        Waste mgt onbd drain off

3   UTS (Collection)
        Obtain UTS & verify vlv - Closed
        Attach UTS - open vlv - Perform task
        UTS vlv - Closed & disconnect

4   UTS/VACUUM (Dump)
        Verify vent line clear
        Connect UT hose/filter to urine/Feces QD
        Attach UTSVACUUM to hose
        Waste mgt ovbd drain - DUMP
        UTS vlv - OPEN (If UTS DUMP)
        Purge lines 30 sec
        Waste mgt ovbd drain - OFF

5 <u>WASTE WATER TANK DRAIN</u>
 Used as req to maintain water level
  between 25 & 85%
 ~~---~~ UR DUMP HTR - ON (verify)
 Verify Urine Vent Line Clear-(Step 1A Above)

 Attach Hose/Filter to Urine/Feces QD
 Waste Tank SVC vlv - CLOSED
 Remove WASTE TANK SVC PLUG (tool L)
 Install Female QD to waste tank SVC port
 Attach Hose to QD on Waste Water Panel

 Waste Mgt Drain - DUMP
 Waste Tank SVC vlv - OPEN
 Monitor waste tank decreasing qty
 Monitor potable tank quantity stable
 ~~At~~ approximately 25% - Waste Tank SVC vlv -
              CLOSED

 Detach UT hose at Waste Tank QD
 Install UTS or vacuum fitting on UT hose
 Purge 30 sec
 Ovbd drain - close
 Detach & stow

6 <u>SIDE HATCH URINE/WATER DUMP</u>
 Remove Dump Nozzle Conn Cover
 Remove Plug & Stow
 Withdraw Wire Guard & Wires from Slot
 Install Male QD on Dump Nozzle
 Connect cable to heater connector
 Util Pwr - off
 Connect cable to utility outlet
 Util Pwr - on (wait 1 hr before dumping)
 Connect Urine Dump Hose to Dump Nozzle QD
 Connect other end of UT hose to UTS/
  Waste Servicing Tank (See Step 5 for
   waste water dump)
 Dump Waste Water/Urine
 Disconnect UT hose from UTS/Waste Servicing
  Tank and Purge
 Disconnect UT Hose from Dump Hozzle & stow
 Util Pwr - off
 Disconnect Cable from heater & outlet & stow
 Install plug & dump nozzle connector

7 WATER COLLECTION *WITH SUIT HOSE*
   If collecting more than 1/2 pint H_2O,
    remove CO_2 Absorber Filter from
    canister A (or B) & replace cover.
   CO_2 Cstr Divert vlv - Both (Ctr)
    (until interlock pin is engaged)
   CO_2 Cstr Divert vlv - A (or B)
    (flows through empty canister)
   Begin water collection
   Monitor part CO_2 Press ind -
    <7.6mm Hg (during time flow is
    through empty canister)
   Complete water collection
    allow 1 min add flow
   Return CO_2 absorber canister
    to original configuration.

CABIN COLD SOAK

1 ACTIVATE
SUIT HT EXCH SEC GLY vlv - FLOW
EVAP H_2O CONT SEC vlv - AUTO
GLY TO RAD SEC vlv - BYPASS
CAB TEMP - MAN
PRIM CAB TEMP vlv - C (CW)
SEC CAB TEMP vlv - OFF (CCW)
SUIT CKT HT EXCH - BYPASS (20sec), then OFF
ECS IND - SEC
SEC COOL LOOP PUMP - AC1
GLY DISCH SEC PRESS - 39-51 psig
SEC ACCUM QTY - 30-55%
SEC COOL LOOP EVAP - EVAP
SEC GLY EVAP OUT TEMP - 40-50.5°F
SEC GLY EVAP STM PRESS -
   0.1-0.15 psia, >.16 not boiling
ECS IND - PRIM
PRIM ECS RAD OUT TEMP >-20°F

If <-20°F, deactivate

2 DEACTIVATE
SEC CAB TEMP vlv - COOL MAX (CW)
~~PRIM CAB TEMP - AUTO~~
SUIT CKT HT EXCH - ON (20 sec), then OFF
SEC COOL LOOP EVAP - RESET 58 sec, min,
   then OFF
SEC COOL LOOP PUMP - OFF
EVAP H_2O CONT SEC vlv - OFF (AUTO for ENTRY)

C&WS OPER CK
C/W LAMP TEST - 1 (hold)
  M/A Pnl 1 - ON
  LH C/W lts (16) - ON
C/W LAMP TEST - 2 (hold)
  M/A Pnl 1 - OFF
  LH C/W lts (16) - OFF
  M/A Pnl 3 - ON
  RH C/W lts (23) - ON
C/W LAMP TEST - OFF (lts OFF)
C/W CSM - CM
  CM RCS lt (both) - ON
  M/A Tone & Lts (3) - ON, RESET
  M/A Tone & Lts (3) - OFF
C/W CSM - CSM
  CM RCS lts (both) - OFF

SYSTEMS TEST METER READOUTS

Systems Test Meter Display	N₂, O₂, H₂ Pressure (PSIA)	EPS Radiator Outlet Temperature (°F)	CM-RCS Oxidizer Valve Temperature (°F)	LM Power (Amps)	SPS Temperature (°F)	Battery Manifold Pressure (PSIA)	Battery Relay Bus (VDC)
0.0	0	-50	-50	0	0	0.00	0
0.2	3	-36	-46	0.4	8	0.72	1.8
0.4	6	-22	-42	0.8	16	1.44	3.6
0.6	9	-8	-38	1.2	24	2.16	5.4
0.8	12	+6	-34	1.6	32	2.88	7.2
1.0	15	+20	-30	2.0	40	3.60	9.0
1.2	18	+34	-26	2.4	48	4.32	10.8
1.4	21	+48	-22	2.8	56	5.04	12.6
1.6	24	+62	-18	3.2	64	5.76	14.4
1.8	27	+76	-14	3.6	72	6.48	16.2
2.0	30	+90	-10	4.0	80	7.20	18.0
2.2	33	+104	-6	4.4	88	7.92	19.8
2.4	36	+118	-4	4.8	96	8.64	21.6
2.6	39	+132	0	5.2	104	9.36	23.4
2.8	42	+146	+4	5.6	112	10.08	25.2
3.0	45	+160	+10	6.0	120	10.80	27.0
3.2	48	+174	+14	6.4	128	11.52	28.8
3.4	51	+188	+18	6.8	136	12.24	30.6
3.6	54	+202	+22	7.2	144	12.96	32.4
3.8	57	+216	+26	7.6	152	13.68	34.2
4.0	60	+230	+30	8.0	160	14.40	36.0
4.2	63	+244	+34	8.4	168	15.12	37.8
4.4	66	+258	+38	8.8	176	15.84	39.6
4.6	69	+272	+42	9.2	184	16.56	41.4
4.8	72	+286	+46	9.6	192	17.28	43.2
5.0	75	+300	+50	10.0	200	18.00	45.0

Basic Date — Nov. 6, 1968
Changed — Nov. 27, 1968

Basic Date — Nov. 6, 1968
Changed —

103

CSM ... 03

TELECOMM PROCEDURES

HI-GAIN ANTENNA OPERATION
cb HI-GAIN ANT FLT BUS - closed
cb HI-GAIN ANT ac GRP 2 - closed
HI-GAIN ANT TRACK - MAN
HI-GAIN ANT SERVO ELEC - PRIM
HI-GAIN ANT BEAM - WIDE
HI-GAIN ANT PWR - POWER
Go to V64 START S-BAND ANTENNA procedures
Verify required coordinates within full
  coverage region
    *If required coordinates are in scan limit
     zone or skin refelction zone, one or more
     of the following may be done:
     a. Change CSM attitude to provide antenna
        coordinates in the full coverage region
     b. Allow up to 60 seconds for the expected
        CSM attitude variation to alleviate the
        condition
     c. In attitude hold condition, operate in
        wide beam mode
     d. Switch to narrow beam and acquire manually
HI-GAIN ANT PITCH & YAW POS (2) - Set in required
                                  coordinates

 *If in earth orbit, S-BD NORM PWR AMPL HI-off(ctr)
S-BD ANT OMNI - HI-GAIN
HI-GAIN ANT S-BD ANT ind - >1/2 scale
HI-GAIN ANT TRACK - AUTO or REACQ
HI-GAIN ANT BEAM - as required depending on range
HI-GAIN ANT S-BD ANT ind - >1/2 scale

CAUTION

HI-GAIN ANT TRACK-MAN when omni antenna
operation is selected to prevent damage
to the HGA due to jitter.

TV CAMERA OPERATION

Unstow camera, lens, and cables
S-BD AUX TV - OFF
Connect power and RF cables
Install proper lens
  (telephoto out of focus at < 143 ft)
  (wide angle out of focus at <18 in)
S-BD AUX TV - TV
ALC (camera) - IN (normally)
                OUT(when detail on dim objects
                    in presence of bright objects
                    is desired)
Power (camera) - ON
When TV operation is completed -
  Power (camera) - OFF
  S-BD AUX TV - off (center)
  Disassemble and stow equipment as desired

Basic Date Nov. 6, 1968 Changed
Basic Date Nov. 6, 1968 Changed
CSM-103
CSM-103

ANTENNA POSITIONS

HIGH GAIN ANTENNA (DEPLOYED)
RENDEZVOUS RADAR ANTENNA
S-BAND OMNI B ANTENNA
S-BAND OMNI A ANTENNA
VHF SCIMITAR RIGHT ANTENNA
BEACON LIGHT
VHF RECOVERY NO.1 ANTENNA
VHF SCIMITAR LEFT ANTENNA
S-BAND OMNI D ANTENNA
S-BAND OMNI C ANTENNA
VHF RECOVERY NO.2 ANTENNA
SWIMMER UMBILICAL & DYE MARKER ASSY
+Z -Y +Y -Z

RENDEZVOUS RADAR ANTENNA
VHF SCIMITAR ANTENNA RIGHT (COVER REMOVED)
VHF SCIMITAR ANTENNA LEFT (COVER REMOVED)
HIGH GAIN ANTENNA (DEPLOYED)
MICRO WAVE ELECTRONICS

RCS ENG VENT

VIEW LOOKING FWD

RCS Engine, Vent, and Radiator Location

Basic Date — Nov. 6, 1968
Changed —

CSM-103

SM RCS propellant profile.

PREDICTED SM-RCS PROPELLANT TRANSLATION COST (CSM-103)

Spacecraft Weight (lbs)	±X 4 Jet PGNCS (lb/fps)	±X 4 Jet SCS (lb/fps)	+X 2 Jet AC PGNCS (lb/fps)	+X 2 Jet AC SCS* (lb/fps)	+X 2 Jet BD PGNCS (lb/fps)	+X 2 Jet BD SCS** (lb/fps)	±Y or ±Z PGNCS (lb/fps)
63600 (Translunar)	7.3	9.1	7.6	9.1	8.0	9.1	9.7
46200 (Lunar Orbit)	5.3	6.4	5.6	6.4	5.7	6.5	6.5
32200 (Transearth)	3.6	4.3	3.5	4.3	4.0	4.3	4.2

* Jets 3 and 4 disabled (A3, C4)

** Jets 7 and 8 disabled (B3, D4)

Minimum impulse control ≈ 0.005 lb/pulse

SM RCS propellant profile (Quad A).

SM RCS propellant profile (Quad B).

SM RCS propellant profile (Quad C).

SM RCS propellant profile (Quad D).

MINUS 2σ SM RCS ON-BOARD
PROPELLANT GAGING METER
CORRECTION NOMOGRAPH

ON-BOARD PROPELLANT GAGING METER
PERCENT USEABLE PROPELLANT REMAINING

Figure 4-3.- Oxygen used for mission from one tank.

Figure 4-4. - Hydrogen used for mission from one tank.

CSM/USB COMM MODE VS RANGE (NM)

NO	UP	DOWN	OMNI 30'/85'	HGA-W 30'/85'	HGA-M 30'/85'	HGA-N 30'/85'
6.2	RNG VOICE CMD	RNG VOICE HBR	12K	30K	115K	LR
			35K	85K	LR	LR
6.3	RNG VOICE CMD	RNG VOICE LBR	35K	95K	LR	LR
			105K	LR	LR	LR
6.8	RNG VOICE CMD	RNG DVBU LBR	50K	135K	LR	LR
			150K*	LR	LR	LR
1.8	RNG	RNG DVBU LBR	85K	195K	LR	LR
			LR	LR	LR	LR
1.10	RNG	RNG DVBU	LR	LR	LR	LR
			LR	LR	LR	LR
-	-	TV OR DSE DUMP	5.5K	14K	55K	110K
			15K	40K	150K	LR

*Up voice, CMD, DVBU and LBR have
LR capability. Special procedures
may permit LR ranging.

S
EMG-1

EMERGENCY PROCEDURES

FIRE/SMOKE IN CM (CREW SUITED)

1 CAB FAN (both) - OFF

2 Monitor EPS for excessive current and remove power from affected bus

3 Verify suit compressor on good AC BUS

4 Use fire extinguisher as appropriate

FIRE IS OUT

5 Remove smoke from cabin per "Contamination in CM" procedures before removing helmets

FIRE PERSISTS - DUMP CABIN

6 Verify:

      SUIT CKT RET vlv - PUSH TO CLOSE

      EMER CAB PRESS vlv - OFF

      02 PLSS vlv - OFF

7 Visually check suit integrity

8 CAB PRESS RELF (RH) - DUMP to 3.0 psia
                  then to BOOST ENTRY
    REMARK: Provides controlled cabin dump until suit circuit pressure is verified

9 Verify Suit pressure > 3.5 psia

10 CAB PRESS RELF (RH) - DUMP
and/or Hatch Vent vlv - open

11 CAB PRESS ind 0.0 psia for 6 min

12 CAB PRESS RELF (RH) - NORMAL

13 Hatch Vent vlv - close

14 Do not repress cabin until fire source is removed

FIRE/SMOKE IN CM (CREW UNSUITED)

1 CAB FAN (both) - OFF

2 SUIT COMPR (both) - OFF

3 Monitor EPS for excessive current and
   remove power from affected bus

4 Don emergency O2 masks

5 Use fire extinguishers as appropriate

FIRE IS OUT

6 Remove smoke from cabin per "Contamination in CM"
   procedure before removing O2 masks

FIRE PERSISTS - DON SUITS and DUMP CABIN

7 Don PGA's except helmets and verify O2 connectors
   (Use O2 masks as long as possible)

8 DIRECT O2 vlv - OPEN (CCW)
       REMARK: Purges suit circuit of smoke and fumes

9 Don helmet

10 Suit flow vlv (3) - SUIT FULL FLOW

11 SUIT COMPR 1 (2) - AC1 (AC2)

12 DIRECT O2 vlv - CLOSE (CW)

13 EMER CAB PRESS vlv - OFF

14 Visually check suit integrity

15 CAB PRESS RELF (RH) - DUMP to 3.0 psia
                           then to BOOST ENTRY

16 Verify Suit pressure holding >3.5 psia

17 CAB PRESS REL (RH) - DUMP
    and/or Hatch Vent vlv - open

18 CAB PRESS ind 0.0 psia for 6 min.

19 CAB PRESS RELF (RH) - NORMAL

20 Hatch Vent vlv - close

21 Do not repress cabin until fire source is removed

Basic Date Nov. 6, 1968
Changed

Basic Date Nov. 6, 1968
Changed

CSM-103

CSM-103

Contamination in CM

1   Don O2 masks and/or PGA's immediately

2   Evaluate contamination level (isolate & correct
    source of contamination if possible) and
    proceed with one of the following steps:
    a. Retain O2 masks or remain in suit and accept
        contamination level in cabin.

CAUTION

> If in PGA's, adjust DIRECT O2 to maintain
> suit to cabin ΔP> 0.38 psi.

   b. Retain O2 masks and scrub cabin atmosphere
       through suit loop. If initially suited,
       establish partially suited or shirtsleeve
       configuration and don O2 masks.

CAUTION

> Change LiOH cartridges after scrub
> completed.

   c. Retain PGA's or don PGA's
       Verify suit integrity (visually)
       Perform Cabin Dump
       Perform Cabin Repress

Contamination In Suit

1   SUIT COMPR 2 - AC1   4

2   SUIT COMPR 1 - OFF

3   DIRECT O2 vlv - OPEN (CCW) for 1 minute   7
    then close (CW)

If condition persists:

4   SUIT COMPR 2 - OFF

5   DIRECT O2 vlv - OFF

6   Doff helmet

7   Don emergency O2 masks

Basic Date — Nov. 6, 1968
Changed —

Basic Date — Nov. 6, 1968
Changed — Dec. 17, 1968

CS 1-03

EMERGENCY POWER DOWN

NOTE: Use only after FC or BATT loss,
        no short verified, & main bus
        voltage < 26.0 VDC.

Powerdown the following components until
til bus voltage ≥26.5 VDC:

Component	Amps
O2 HTRS(both)-OFF	11.0amps
NONESS BUS-OFF	4.9
FLT QUAL RCDR-OFF	.74
GMBL MTRS(4) - OFF/ON	20.0
MN A&B BAT C cb(both)-Close	-
ECS RAD HTRS PRIM & SEC-OFF	17.3
FC PUMPS (3)-OFF	3.0ea
SM RCS HTRS A,B,C&D-OFF	2.86ea
POT H2O HTR-OFF	1.6
H2 HTRS (both)-OFF	1.44
CAB FANS(both)-OFF	1.94
SPS LINE HTR-OFF	1.03ea
LIGHTS - Min reqd	-

CMC To STBY
   V48E
   F04 46 Load 0 Left digit R1
   PRO,PRO,PRO, V46E
   F 50 25 00062 CMC PWR ON
   PRO-HOLD until STBY Lt On

G&N PWR DN (STBY)
   CMC MODE - FREE
   G&N IMU PWR-OFF

S-Bd PWR AMP-OFF	3.53
TAPE RCDR-OFF	

GLY/EVAP STM PRESS-MAN
STM PRESS-INCR(58sec)
   H2O FLOW-OFF

TEMP IN-MAN	2.77ea
ECS GLY PUMPS - OFF	

SEC COOL LOOP EVAP -RESET(58sec)

PUMP -OFF	2.69

ECS RAD CONT/HTR cb(both)-OPEN

EMERGENCY POWER DOWN (CONT)

PWR SCE-OFF   .65
VHF(both)-OFF
HGA PWR-OFF
TELECOM GRP 1&2
CONFIG for single inverter-Open
INSTRUM ESS MN A&B cb(both)OPEN   5.54
SUIT COMPR(both)-OFF
  DIR 02-ON(If Suited)   -

UNACCEPTABLE VEHICLE DYNAMICS DURING CRITICAL SPS THRUSTING

1 THC - CW
2 DAMP RATES USING RATE NEEDLES
3 CHECK FDAI #1 ATTITUDE: If attitude and
   error needles are not steady use FDAI #2
   to return to desired burn attitude.
4 If above fails - with small divergence
   attempt rolling vehicle to cancel errors.

PREMATURE SPS SHUTDOWN DURING CRITICAL BURN

1 SPS THRUST DIRECT SW - ON
2 CHECK ΔV THRUST A/B - ON
3 CHECK SPS PILOT vlvs and SPS Helium vlv
   CB's CLOSED (PNL 8)
4 CHECK EPS GRP 3 & 5 CB's CLOSED (PNL 229)
5 FCSM (2) - RESET/OVERRIDE
6 SPS He vlv (2) - ON
7 S/C CONT - SCS
8 SCS TVC - AUTO
9 THRUST - ON

SPS ENGINE DOES NOT SHUTDOWN AUTOMATICALLY

1 ΔV THRUST A/B - OFF
2 THC - CW
3 CHECK SPS DIRECT ON - OFF
4 SPS PILOT vlv (2) CB's - OPEN (PNL 8)
5 EPS Group 5 CB's - OPEN (PNL 229)

Basic Date — Nov. 6, 1968
Changed — Dec. 17, 1968

Basic Date — Mar. 6, 1968
Changed — Dec. 17, 1968

SPS FLANGE TEMP LIGHT DURING LOI₁ BURN

1 If <120 sec, shutdown and perform Mode I
   15 min abort
2 If >120 sec, shutdown

SPS PRESSURE LIGHT ON DURING CRITICAL BURN

1 Pressure high - SPS He vlv (2) - OFF
2 Pressure low
   a. SPS He vlv (2) - ON
   b. If pressure does not increase-
       Except during TEI

SM RCS THRUSTER FAILED - ON

1 SC CONT to Alternate Source
2 ROT CONTR PWR DIRECT(both)-MN A/B
      (Control Rates In Direct)
3 AUTO RCS SEL - OFF (In Affected Axis)
4 DIRECT Ullage cb(both)- Open
5 If vehicle rates are still uncontrolled:
   a. AUTO RCS SEL (16) - ON
   b. MAN ATT(3)-ACCEL CMD
   c. ROT CONTR PWR DIRECT (both)-OFF
6 If rates are still uncontrolled:
   SM RCS Prplnt - OFF

FC 1(2)(3) LIGHT ON DUE TO PH Hi tb-bp

1 FC 1(2)(3) PUMPS - OFF
2 POTABLE TANK INLET vlv - CLOSE

MN BUS A(B) UNDERVOLT LIGHT ON

1 Check pertinent bus voltage
2 If only one bus low and high current
   isolate & reconfig
3 If both busses low use powerdown cklist,
   pg 5 EMG-5.

AC BUS 1(2) LIGHT ON WITH MN BUS A(B) UNDERVOLT AND/OR BUS 1(2) OVERLOAD

Turn OFF associated inverter within 5 sec

CABIN PRESSURE <5psia AND DECREASING

1 CABIN PRESSURE REL vlv(both)-CLOSED
2 Don PGA's - unstow O_2 masks if not
   100% O_2 atmosphere

O_2 Hi LIGHT ON - CABIN PRESSURE NORMAL
OR HIGH

1 Check O_2 flow ind - if not pegged
   isolate C&W or ind failure by turning
   on DIRECT O_2 valve moment.
2 If O_2 flow ind is pegged, check for low
   surge tank press. If cryo tank - surge
   tank ΔP <50psi the flow sensor has failed
3 With low surge tank - MAIN REG A&B-CLOSED

SUIT COMPRESSOR FAILS WHILE SUITED

1 Select redund suit compr on alt AC bus
2 At critical time turn on DIRECT O_2 valve
3 When feasible, remove helmets

H_2 or O_2 FC FLOW HIGH

1 Check O_2 & H_2 Flow Rates
2 If one is High, cycle approp
   purge valve several times
   CAUTION: If H_2 flow is high turn on H_2
   purge line htr before cycling purge valve

PRIM EVAP OUT TEMP HIGH (APPROACHING 60°)

1 ECS IND SEL - SEC
2 SEC COOL LOOP PUMP - AC1 or AC2
3 SEC COOL LOOP EVAP Sw - EVAP

Basic Date - Nov. 6, 1968
Changed Dec. 17, 1968

Basic Date - Nov. 6, 1968
Changed Nov. 27, 1968

CSM 103

G&C CHECKLIST TABLE OF CONTENTS

G&C CHECKLIST

Basic Date Nov. 6, 1968
Changed Dec. 15, 1968

CSM 103

Basic Date Nov. 6, 1968

CSM 103

NORTHERN STARS

SOUTHERN STARS

Changed

Basic Date — Nov. 6, 1968
Changed

1968

CSM 103

STAR LIST

STAR NAME (Numerical)		STAR NAME (Alphabetical)	
00	Planet	Acamar	6
1	Alpheratz	Achernar	4
2	Diphda	Acrux	25
3	Navi	Aldebaran	11
4	Achernar	Alkaid	27
5	Polaris	Alphard	21
6	Acamar	Alphecca	32
7	Menkar	Alpheratz	1
10	Mirfak	Altair	40
11	Aldebaran	Antares	33
12	Rigel	Arcturus	31
13	Capella	Atria	34
14	Canopus	Canopus	14
15	Sirius	Capella	13
16	Procyon	Dabih	41
17	Regor	Deneb	43
20	Dnoces	Denebola	23
21	Alphard	Dephda	2
22	Regulus	Dnoces	20
23	Denebola	Earth	47
24	Gienah	Enif	44
25	Acrux	Fomalhaut	45
26	Spica	Gienah	24
27	Alkaid	Menkar	7
30	Menkent	Menkent	30
31	Arcturus	Mirfak	10
32	Alphecca	Moon	50
33	Antares	Navi	3
34	Atria	Nunki	37
35	Rasalhague	Peacock	42
36	Vega	Planet	00
37	Nunki	Polaris	5
40	Altair	Procyon	16
41	Dabih	Rasalhague	35
42	Peacock	Regor	17
43	Deneb	Regulus	22
44	Enif	Rigel	12
45	Fomalhaut	Sirius	15
46	Sun	Spica	26
47	Earth	Sun	46
50	Moon	Vega	36

VERB LIST (Decimal)

01 Display Oct Compnt 1 (R1)
02 Display Oct Compnt 2 (R1)
03 Display Oct Compnt 3 (R1)
04 Display Oct Compnt 1, 2 (R1, R2)
05 Display Oct Compnt 1, 2, 3 (R1,R2,R3)
06 Display Decimal (R1 or R1, R2 or R1,R2,R3)
07 Display DP Decimal (R1,R2)
11 Monitor Oct Compnt 1 (R1)
12 Monitor Oct Compnt 2 (R1)
13 Monitor Oct Compnt 3 (R1)
14 Monitor Oct Compnt 1, 2 (R1, R2)
15 Monitor Oct Compnt 1, 2, 3 (R1,R2,R3)
16 Monitor Decimal (R1 or R1,R2 or R1,R2,R3)
17 Monitor DP Decimal (R1,R2)
21 Load Compnt 1 (R1)
22 Load Compnt 2 (R2)
23 Load Compnt 3 (R3)
24 Load Compnt 1, 2 (R1, R2)
25 Load Compnt 1, 2, 3 (R1, R2, R3)
27 Display Fixed Memory
30 Request Executive
31 Request Waitlist
32 Recycle Prog
33 Proceed Without DSKY inputs
34 Terminate Function
35 Test Lights
36 Request Fresh Start
37 Change Prog (Major Mode)
*40 Zero ICDU (N20)
41 Coarse Align CDU (N20 & N91)
42 Fine Align IMU
*44 Set surface flag
*45 Reset surface flag
*46 Activate DAP
*47 Set LM State Vector into CSM State Vector
48 Load DAP (R03)
49 Start Crew Defined MNVR(R62)
50 Please Perform

51 Please Mark
*52 Marked on offset landing site
53 Please Mark alternate LOS
54 Start REND backup sighting mark (R23)
55 Increment CMC Time (Decimal)
*56 Terminate Tracking (P20)
57 Start REND sighting mark (R21)
*58 Reset Stick FLAG
59 Please Calibrate
*60 Set N17 = N20
*61 Display DAP att error
*62 Display total att error (N22-N20)
*63 Display total astro att error (N17-N20)
64 Start S-band ant routine (R05)
*65 Verify Prelaunch Align Optics (CSM)
*66 Set CSM State Vector into LM State Vector
67 W-Matrix RMS Error Display
*69 Restart
70 Update Liftoff Time (P27)
71 Univ Update-BLOCK ADR (P27)
72 Univ Update-SINGLE ADR (P27)
73 Update CMC Time (Octal) (P27)
*74 Initialize erasable dump via downlink
*75 Backup Liftoff
*76 Set preferred att flag
*77 Reset preferred att flag
*78 Update prelaunch azimuth
79 Start lunar LMK selection (R35)
*80 Update LM State Vector
*81 Update CSM State Vector
82 Start Orbit Param Disp (R30)
83 Start REND Param Display (R31)
85 Start REND Param Display No.2 (R34)
*86 Reject REND backup sighting mark
*87 Set VHF range flag
*88 Reset VHF range flag
89 Start REND Final ATT Routine (R63)

Basic Date Nov. 6, 1968 Changed

Basic Date Nov. 6, 1968 Changed

CSM 103

P30-39

P22

P23

90 Request REND out of plane display (R36)
91 Compute Banksum
*92 Start IMU performance test (P07)
*93 Enable REND W matrix initialization
*94 Enable CISLUNAR Tracking recycle
*96 Terminate integration and go to P00
97 SPS Thrust Fail (R40)
99 Enable engine ignition

*Callable with other extended verb in use
and does not lock out other extended verbs.

NOUN LIST (Decimal)

No.	Description	Format
01	Specify Machine Address (Fract) (R1,R2,R3)	.XXXXX
02	Specify Machine Address (Whole) (R1,R2,R3)	
03	Specify Machine Address (can be R1,R2,R3)	.01°
05	Angular Error/Diff	.01°
06	Option Code (R1 & R2)	OCTAL
07	FLAGWORD operator,ECADR,BIT ID, Action	
08	Alarm Data	OCTAL
09	Alarm Codes	OCTAL
10	Channel to be Specified (R1)	OCTAL
15	Increment Machine Address (R1)	OCTAL
16	Time of event	hrs,min,.01sec
17	Astronaut total att	R,P,Y .01°
18	Auto Maneuver	R,P,Y .01°
20	Present ICDU Angles	R,P,Y .01°
21	PIPA PULSES X,Y,Z	Pulses
22	New ICDU Angles	R,P,Y .01°
24	Delta CMC Clock Time	hrs,min,.01sec
25	Checklist (please perform)	
26	Prio/Delay, ADRES, BBCON(R1,R2 & R3)	OCTAL
27	Self-Test on/off sw	
29	X SM LAUNCH Azimuth	.01°
30	Target Code(Gyrocomp verif)	
31	Time of landing site	hrs,min,.01sec
32	Time from Perigee	hrs,min,.01sec
33	Time of Ignition (GETI)	hrs,min,.01sec
34	Time of Event	hrs,min,.01sec
35	Time from Event	hrs,min,.01sec
36	Time of CMC Clock	hrs,min,.01sec
37	GETI-TPI	hrs,min,.01sec
38	State Vector Time	hrs,min,.01sec
39	Δ Time of Transfer	hrs,min,.01sec

Basic Date
Changed Nov. 6, 1968

Basic Date
Changed Nov. 6, 1968

P30-39

P22

P23

CSM-03

CSM-03

40	TF GETI/TFC	min-sec
	VG	.1 FPS
	ΔV (Accumulated)	.1 FPS
41	Target	Azimuth .01°
		Elevation .001°
		Ident 0000X
42	Apogee Alt (HA)	.1 NM
	Perigee Alt (HP)	.1 NM
	ΔV (Required)	.1 FPS
43	Lat	.01°
		(+ North)
	Long	.01°
		(+ East)
	Alt	.1 NM
44	Apogee Alt (HA)	.1 NM
	Perigee Alt (HP)(N50)	.1 NM
	TFF	min-sec
45	Marks	XXBXX
	TF GETI of next burn	min-sec
	MGA	.01°
46	DAP Config (R1&R2)	OCTAL
47	CSM weight	LBS
	LM Weight	LBS
48	Pitch Trim	.01°
	Yaw Trim	.01°
49	ΔR	.1 NM
	ΔV	.1 FPS
	SOURCE CODE	0000X.
50	ΔR (miss distance)	.1 NM
	PERIGEE (HP)	.1 NM
	TFF	min-sec
51	RHO	.01°
	GAMMA	.01°
52	CENTANG (active veh)	.01°
53	RANGE	.01 NM
	RANGE RATE	.1 FPS
	PHI (lcl horiz)	.01°
54	Range	.01 NM
	Range Rate	.1 FPS
	Theta (lcl horiz)	.01°

55	Perigee code	CODE
	R2 E(ELEV ANGLE)	.01°
	R3 CENTANG (passive veh)	.01°
57	ΔR offset (SOR)	.1 NM
	(+ indicated behind LM)	
58	HP alt (post TPI)(SOR for P38)	.1 NM
	ΔV (TPI)(SOR for P38)	.1 FPS
	ΔV (TPF)(SOR FINAL for P38)	.1 FPS
59	ΔV LOS 1	.1 FPS
	ΔV LOS 2	.1 FPS
	ΔV LOS 3	.1 FPS
60	G Max	.01 G
	V Pred	FPS
	Gamma EI	.01°
61	Impact Lat	.01°
		(+ North)
	Impact Long	.01°
		(+ East)
	Head Up/Down	+/-00001
		(+ Heads up)
62	VI-Inertial Vel Mag	FPS
	H Dot-Alt Rate	FPS
	H-Alt Above Pad Radius	.1 NM
63	RTGO from 0.05 G	.1 NM
	To Splash	
	VIO, Predicted Iner Vel	FPS
	TFE, time from .05G	min-sec
64	Drag Acceleration	.01 G
	VI, Inertial Velocity	FPS
	RTOGO to Target	.1 NM
65	Sampled CMC Time	hrs,min,.01 sec
	(fetched in interrupt)	
66	Beta, CMD Bank Angle	.01°
	CRSRNG Error	.1 NM
	DNRNG Error	.1 NM
67	RTOGO to Target	.1 NM
	Lat, Present Position	.01°
		(+ North)
	Long, Present Position	.01°
		(+ East)

Basic Date 6, 1968 Changed

Basic Date Nov. 6, 1968 Changed

CSM 1

CSM 103

P30-39

P22

P23

68	Beta, CMD Bank Angle			.01°
	VI, Inertial Vel.			FPS
	H Dot, Alt Rate			FPS
69	Beta			.01°
	DL			.01 G
	VL			FPS
70	Star Code(before mark)			OCTAL
	LMK Data			OCTAL
	Horiz data			OCTAL
71	Star code (after mark)			OCTAL
	LMK Data			OCTAL
	Horiz data			OCTAL
72	Δ ang			.01°
	Δ alt			.1 NM
	Search option			
81	ΔVX,Y,Z (lcl vert)			.1 FPS
83	ΔVX,Y,Z (Body Control Axis)			.1 FPS
84	ΔVX,Y,Z (Other Vehicle)			.1 FPS
85	VGX,Y,Z (Body Control Axis)			.1 FPS
87	Opt Calib Data - Shaft (R1)			.01°
		Trunnion(R2)		.001°
88	Planet		X	.XXXXX
			Y	.XXXXX
			Z	.XXXXX
89	Landmark - Lat			.001° (+ North)
		Long/2		.001° (+ East)
		Alt		.01 NM
90	REND out of	Y		.01 NM
	Plane para	Y DOT		.1 FPS
		PSI		.01°
91	OCDU Angles Shaft (R1)			.01°
		Trunnion (R2)		.001°
92	New OCDU Angles Shaft (R1)			.01°
		Trunnion (R2)		.001°
93	Delta Gyro Angles X,Y,Z			.001°
94	OCDU ANGLES (R56 & R23)			
		R1 SHAFT		.01°
		R2 TRUNNION		.001°

95	Pref att ICDU angles	.01°
96	+X axis att ICDU angles	.01°
97	System Test Inputs	XXXXX.
		XXXXX.
		XXXXX.
98	System Test Results	XXXXX.
		.XXXXX
		XXXXX.
99	POS ERR	.01 NM
	VEL ERR	.1 FPS
	OPTION Code	000X.

Basic Date Nov. 6, 1968 Changed

Basic Date Nov. 6, 1968 Changed

CSM 03

CSM 03

P30-39

P22

P23

V05 N09 ALARM CODES

00110   Mark reject has been entered but ignored

00112   Mark reject with no marks being accepted

00113   No inbits (chan 16)

00114   More marks made than desired

00115   V41 N91 keyed with OPTICS MODE not in CMC

00116   Optics switch altered before 15 sec zero time elapsed

00117   V41 N91 keyed but CMC has reserved OCDU (from start of gimbal test in P40 until termination of TVC functional allocation of the "optics" CDU Driving Output)

00120   Optics torque has been requested but optics have not been zeroed since last FRESH START or RESTART

(m)00121   In 0.05 sec following mark, an ICDU changed by more than 0.033°

00122   Marking not called for

00124   P17(77) TPI search unsuccessful

(m)00205   PIPA saturated

00206   The IMU zero routine has been entered with both the GMBL LOCK lt and NO ATT lt on

(m)00207   ISS turn-on request not present for 90 sec

(m)00210   The IMU is not operating

(m)00211   Coarse align error

(m)00212   PIPA fail, but PIPA is not being used

(m)00213   IMU not operating with turn-on request

00214   Program using IMU when turned OFF

(m)00217   IMU coarse align or pulse torque difficulty has occurred

00220   IMU orientation unknown

00401   Desired middle gimbal angle is excessive

00404   Target out of view (90 deg test)

00405   Acceptable star pair is not available

00406   Rend navigation not operating

00407   Target out of view (50° test)

00421   W-matrix overflow

00605   Number of iterations exceeds loop maximum

00611   No TIG for given ELEV angle

00612   State vector in wrong sphere of influence

00613   Reentry angle out of limits

00777   ISS warning caused by PIPA fail

01102   CMC self test error

*01103   Unused CCS branch executed

**01104   Delay routine busy

(m)01105   Downlink too fast

(m)01106   Uplink too fast

01107   Phase table failure assume erasable memory is destroyed

**01201   Executive overflow - no vac. area

**01202   Executive overflow - no core sets

**01203   Waitlist overflow - too many tasks

*01206   Second job attempts to go to sleep via keyboard and display program

**01207   No vac area for marks

*01210   Second attempt is made to stall

**01211   Illegal interrupt of extended verb

*01301   Arcsin or arccos input is greater than one

*01302   SQRT called with negative argument

(m)01407   VG increasing

01426   IMU unsatisfactory

01427   IMU reversed

Basic Date — Nov. 6, 1968 —— Changed

Basic Date — Nov. 6, 1968 —— Changed

P30-39

P22

P23

*01501 Keyboard and display alarm during
       internal use (NVSUB)
*01502 Illegal flashing display
 01520 V37 request not permitted at this
       time
 01600 Overflow in drift test
 01601 Bad IMU torque abort
 01602 Bad optics during verification
 01703 Insufficient time for integration
       TIG slipped
 03777 ISS warning caused by ICDU fail
 04777 ISS warning caused by ICDU & PIPA fail
 07777 ISS warning caused by IMU fail
 10777 ISS warning caused by IMU & PIPA fail
 13777 ISS warning caused by IMU & ICDU fail
 14777 ISS warning caused by IMU,ICDU & PIPA fail

(m) - Malf procedure indicated
 * - Generates Restart, F37
 ** - Restart and program continues
                    (i.e. attempted recovery)

V50 N25 CHECKLIST CODES

R1 Code	ACTION	FUNCTION
00014	Key in	Fine Align Option
00015	Perform	Celestial Body Acquisition
00016	Key in	Terminate Mark Sequence
00041	Switch	CM/SM SEP to UP
00062	Key	CMC to STBY
00202	Perform	PGNS AUTO MNVR
00204	Key in	Engine gimbal test option

V04 N06 OPTION CODES

R1 Code	Purpose	Input for R2
00001	Specify IMU Orientation	1=PREF, 2=NOM 3=REFS, 4=LDG SITE
00002	Specify vehicle	1=CSM, 2=LM
00003	Specify tracking Attitude	1=Preferred, 2=+X-axis
00005	Specify SOR Phase	1=First, 2=Second
00007	Specify Propulsion System	1=SPS, 2=RCS

Basic Date Nov. 6, 1968
Changed

Basic Date Nov. 6, 1968
Changed

CSM 103

CSM 103

898

P30-39

P22

P23

CMC POWER UP PROCEDURE

1   PRO, push until STBY Lt - out
                     (repeat, if necessary)
                         CMC warning, RESTART, PROG ALARM
                       *RSET and continue   *

2   F 37   OOE

IMU POWER UP PROCEDURE
LOGIC POWER 2/3 - on
FDAI POWER - both
FDAI SELECT - 1/2
CMC MODE - FREE

1   G/N IMU PWR - on (up)
              NO ATT Lt - on (90 sec)
              NO ATT Lt - out
             Wait 20 sec

2   V37E XXE
              *If CMC Failed: *
              *   G/N IMU PWR - on(up)   *
              *   Wait 90 sec   *
              *   IMU CAGE - on(up) 5 sec, then off*

P06 - CMC POWER DOWN PROGRAM

1   V48E
   F 04 46   Load 0 (NO DAP) in left digit of R1
             PRO
             PRO
             PRO
             V46E

2   V37E 06E
   F 50 25   00062 CMC PWR DN

             PRO, push until STBY Lt - on

IMU POWER DOWN PROCEDURE
CMC MODE - FREE

1   G/N IMU PWR - OFF
              ISS warning
              *RSET   *

Basic Date Changed

996

P30-39

P22

P23

P17 - TPI SEARCH
or
P77 - LM TPI SEARCH
CMC - on (req)

1
    F 06 37   V37E 17E or V37E 77E
                GETI (TPI)   (hrs,min,.01sec)
                 Load desired GETI
                 PRO

2
    F 06 72   ΔANG(TPI),ΔALT(TPI),SEARCH OPT
                                 (.01°,.1nm,0000X)
            (Do not key V82 during this display)
            R3=SEARCH OPT 00001<180°
                           00002>180°
     (change GETI TPI)   V32E To 1
     (change Search opt) V23E
             PRO

                F 05 09 00124 alarm code
                *V32E, RSET To 1   *

3
    F 06 58   HP,ΔV(TPI,ΔV(TPF)   (.1nm,.1fps,.1fps)
        (RECYCLE) V32E To 1 to adjust
                 GETI or Search option
             PRO

4
    F 06 55   R1=Perigee Code, R3=CENTANG(0000X,.01°)
              00001, perigee between TPI and TPF
              00002, perigee after TPF
    (RECYCLE) V32E To 1 to adjust
                 GETI or Search option
             PRO

5
    F 37   XXE

P20 - RENDEZVOUS NAVIGATION
CMC - on (req)
ISS - on and aligned (req)
SCS - on (des)
BMAG MODE (3) - RATE 2
G/N OPT PWR - on (verify)
OPT ZERO - ZERO (verify)
OPT MODE - CMC

1
             V37E 20E
   F 50 18   Request MNVR to FDAI RPY angles   (.01°)
                  If only F 50 - KEY RLSE
   (AUTO)   SC CONT - CMC
                CMC MODE - AUTO
           PRO
  06 18   RPY (.01) To 1 (when MNVR complete)
   (MAN)   SC CONT - SCS
           PRO To 1
       or V62E
           RHC - MNVR To 1

When attitude OK:
           CMC MODE - AUTO
        ENTR
           OPTIC ZERO - OFF

           *POSS prog alarm   *
           *Key V5N9E 00407 (TA>50°) *
           *V16N 22E   *
           GMBL ANGLES RPY   (.01°)
           *or V16N 92E   *
           OPTICS SHAFT,TRUN (.01°,.001°)
           *(AUTO) SCS CONT - CMC   *
           *   CMC MODE - AUTO   *
           *   V58E   *
           *(MAN) MNVR to 2 (SXT)   *
           *   or to 3 (COAS)   *

2
           V57E (SXT)
   F 51   OPT MODE - MAN
           OHC - Cntr Target in SXT
  MARK (repeat as necessary)

```
                       *POSS F 06 49 ΔR,ΔV, source code*
                       *            (.1nm,.1fps,00001)  *
                       *(REJECT)    V32E                *
                       *(ACCEPT)    PRO                 *
                       Drive Trunnion to <5°
                       OPT ZERO - ZERO

                  PRO  (return to program in process)
                       (To terminate P20 - V56E)

3                      V54E (COAS)
   F 06 94             SHAFT, TRUNNION             (.01°,.001°)
                       PRO

4  F 53                Request Alt LOS MARK
                       RHC - ALIGN Target in COAS
                       ENTR (V86E To reject)
                       *POSS F 06 49 ΔR,ΔV, source code*
                       *            (.1nm,.1fps,00001)  *
                       *(REJECT)    V32E                *
                       *(ACCEPT)    PRO                 *
                  PRO  (return to Program in process)
                       (To Terminate P20 - V56E)


                  P21 GROUND TRACK DETERMINATION
               Note:  Do not key V82 during step 1 or 2
                      CMC - on (req)

1                      V37E 21E
   F 04 06             00002, Specify Vehicle
                       00001, CSM
                       00002, LM
                       PRO

2  F 06 34             GET LAT,LONG            (hrs,min,.01sec)
                       Load desired GET
                       PRO

3  F 06 43             LAT,LONG,ALT           (.01°,.01°,.1nm)
                       (RECYCLE)  V32E to 2 (Increment GET 10 min)
                       (EXIT)     PRO

4  F 37      XXE       above 10,000 nm  Key V16 N02E, 1107E
                       ALT nm = R 1(XXXXX.) x 17.7
```

```
                  P22 - ORBITAL NAVIGATION
                       CMC - on (req)
                       ISS - on and aligned (req)
                       SCS - on (req)
                       BMAG MODE (3) - RATE 2
                       G&N PWR OPTICS - on (verify)
                       OPTICS COUPLING - RESOLVED
                            SPEED - MED
                       OPT ZERO - ZERO (verify)
                       OPT MODE - CMC

1                      V37E 22E
   F 06 45             R3=MAX MGA                      (.01°)
          (REJECT)  R3>60° to P52
                    R3<60° IMU ALIGNED
                    MNVR To SIGHTING ATTITUDE
                         Roll to keep shaft axis >10° from
                         plane defined by X axis & LOS to
                         LMK
          (MAN)     OPT MODE - MAN
                    OPT ZERO - OFF
                    PRO (To 3 for earth orbit)
          (AUTO)    OPT ZERO - OFF
                    PRO (To 3 for earth orbit)

2  F 05 70             (lunar orbit only)
                    R2 ABCDE 1mk code
                    Load 1mk code
                       A=1(known), 2(unknown)
                       B=INDEX OF OFFSET designator
                       C=not used
                       DE=LMK ID
                    IF A=2
                       OPT MODE - MAN
                    PRO to 5
                 or IF A=1 & DE≠00
                    PRO to 4 (To 5 if OPTICS - MAN)
                 or IF A=1 & DE=00
                    PRO to 3

3  F 06 89             LAT,LONG/2,ALT       (.001°,.001°,.01nm)
                    Load 1mk coords
                    PRO (To 5 IF OPTICS - MAN)
```

4   06 92   SHAFT,TRUN NEW OCDU   (.01°,.001°)
                  *POSS Prog Alarm lt (Trun>50°**
                 *   MNVR to acquire   **
                 F 05 09 00404   (TRUN>90°)
                 *   MNVR to acquire   *
                 *   PRO   *
                 * or V34E, F 37   *
          Establish proper pitch rate
             OPTICS MODE - MAN

5   F 51   MARK REQUEST
          MARK (wait 10 sec between MARKS)
            After sufficient MARKS:
                 *After 5 MARKS: *
                 F 50 25 00016 TERM MARKS
          PRO

6   F 05 71   R2 ABCDE LMK DATA
          Load lmk code (if nec)
            A=1 if KNOWN LMK
            A=2 if UNKNOWN LMK
            B=INDEX OF OFFSET DESIGNATOR
              (If only 1 mark made, insure B=0)
            C=Not used in P22
            DE=LMK ID no.

            PRO - if A=2 (or A is 1 & DE ≠ 0) to 8

7   F 06 89   LAT,LONG/2,ALT   (.001°,.001°,.01nm)
          PRO

8   F 06 49   ΔR,ΔV (ORB PARA)   (.1nm,.1fps)
          (REJECT CYCLE) V32E to 2
          (ACCEPT)   PRO

9   F 06 89   LAT,LONG/2,ALT LMK ID
                    (.001°,.001°,.01nm)
          (DON'T STORE)   V32E to 2
          (STORE-CODE 01) PRO to 2
          (terminate Prog) V34E

10   F 37   XXE
          OPT ZERO - ZERO

P22 - ORBITAL NAVIGATION
(LDG SITE - AUTO OPTICS)
    CMC - on (req)
    ISS - on & aligned (req)
    SCS - on (req)
    ORB RATE BALL (des)
    G/N PWR OPTICS - on (verify)
    OPTICS COUPLING - RESOLVED
               SPEED - MED
    OPT ZERO - ZERO (verify)
    OPT MODE - CMC
    16mm camera - installed

1   V37E 22E
    F 06 45   R3=Max MGA with X axis in-plane
                 If R3 > 60°, Go To P52

          MNVR to SIGHTING ATTITUDE
            Roll to keep shaft axis > 10° from
            plane defined by X axis & LOS to LMK
          PRO

2   F 05 70   R2=LMK DATA
          Load 10001
            OPT ZERO - OFF
          PRO

3   06 92   AUTO OPTICS SHAFT, TRUN   (.01°,.001°)
                 POSS Prog Alarm lt (Trun >50°)
                 * MNVR to acquire   *
                 F 05 09 00404   (Trun >90°)
                 * MNVR to acquire   *
                 *   PRO   *
                 * or V34E, F 37   *
          Establish proper pitch rate
            OPTICS MODE - MAN

4   F 51   REQUEST MARK
                MARK (wait 10 sec between MARKS)
            After sufficient MARKS:
                    *After 5 MARKS: *
                    *F 50 25 00016 TERM MARKS *

            PRO

5   F 05 71   R2=10001 LMK DATA
                PRO

6   F 06 49   ΔR,ΔV ORB PARA   (.1nm,.1fps)
                Hold 1 min
                PRO

7   F 06 89   LAT,LONG/2,ALT   (.001°,.001°,.01nm)
                Compare with map
                V34E

8   F 37   XXE

              OPT ZERO - ZERO

P22 ORBITAL NAVIGATION
(UNKN CONT PT. - MAN OPTICS)
      CMC - on (req)
      ISS - on & aligned (req)
      SCS - on (req)
      ORB RATE BALL (des)
      BMAG MODE (3) - RATE 2
      G/N PWR OPTICS - on (verify)
      OPT ZERO - ZERO (verify)
      OPT MODE - MAN
      16mm camera - installed
      RCDR - LBR/RCD/FWD (Verify)

1   V37E 22E
   F 06 45   R3=Max MGA with X axis in-plane
                    If R3 > 60°, Go to P52

           MNVR to SIGHTING ATTITUDE
                Roll to keep shaft axis > 10° from
                plane defined by X axis & LOS to LMK

           PRO

2   F 05 70   R2=LMK DATA
            LOAD 20000
            Establish proper pitch rate
                OPT ZERO - OFF
            PRO

3   F 51   REQUEST MARK
            V16 N91E

4   F 16 91   SHAFT,TRUN   (.01°,.001°)
            MARK (wait 10 sec between MARKS)
            After sufficient MARKS:
                    *After 5 MARKS: *
                    F 50 25 00016 TERM MARKS
            KEY RLSE
            PRO

5   F 05 71   R2 20000 LMK DATA
                PRO (If only 1 MARK to 6)

6   F 06 49   ΔR,ΔV ORB PARA   (.1nm,.1fps)
                PRO

7   F 06 89   LAT,LONG/2,ALT   (.001°,.001°,.01nm)
                Record for future use
                (RECYCLE) V32E to 2
                (EXIT)   V34E

8   F 37   XXE

                OPT ZERO - ZERO

Nov. 6, 1968
Dec. 11, 1968
Basic Date
Changed
CSM 103

Nov. 6, 1968
Dec. 11, 1968
Basic Date
Changed
CSM 103

P30-39

P22 ORBITAL NAVIGATION
(KN CONT PT. - AUTO OPTICS)
        CMC - on (req)
        ISS - on & aligned (req)
        SCS - on (req)
        ORB RATE BALL (des)
        BMAG MODE (3) - RATE 3
        G/N PWR OPTICS - on (verify)
        OPTICS COUPLING - RESOLVED
                SPEED - MED
        OPT ZERO - ZERO (verify)
        OPT MODE - CMC
        RCDR - LBR/RCD/FWD (Verify)

1   V37E 22E
     F 06 45   R3=Max MGA with X axis in-plane
                     If R3 >60°, Go to P52

                 MNVR to SIGHTING ATTITUDE
                     Roll to keep shaft axis > 10° from
                     plane defined by X axis & LOS to LMK
                 PRO

2   F 05 70   R2=LMK DATA
                 LOAD 10000
                 PRO

3   F 06 89   LAT,LONG/2,ALT   (.001°,.001°,.01nm)
                 Load lmk coords
                     OPT ZERO - OFF
                 PRO

4   06 92   AUTO OPTICS SHAFT,TRUN   (.01°,.001°)
                     POSS Prog Alarm 1t (Trun >50°)
                     * MNVR to acquire   *
                     F 05 09 00404   (Trun >90°)
                     * MNVR to acquire   *
                     *   PRO   *
                     * or V34E, F 37   *
                 Establish proper pitch rate
                     OPTICS MODE - MAN

P40.41 47

P23

5	F 51	REQUEST MARK

MARK (wait 10 sec between MARKS)
  After sufficient MARKS:
      *After 5 MARKS: *
      *F 50 25 00016 TERM MARKS *

      PRO

6	F 05 71	R2=10000 LMK DATA

      PRO

7	F 06 89	LAT,LONG/2,ALT (.001°,.001°,.01nm)

      Verify data
      PRO

8	F 06 49	ΔR,ΔV ORB PARA (.1nm,.1fps)

      PRO

9	F 06 89	LAT,LONG/2,ALT (.001°,.001°,.01nm)

      Rcrd for future use
  (RECYCLE) V32E to 2
  (EXIT)   V34E

10	F 37	XXE

      OPT ZERO - ZERO

P23 OPTICS CALIBRATION

    CMC - on
    OPT ZERO - ZERO (verify)
    OPT MODE - MAN

1	F 05 70	V37E 23E (IMU NOT ALIGNED - To 3)

      STAR ID(ABCDE)/LMK ID/HOR ID
      Insure R1 DE≠00 and R3≠00000
      PRO

2	F 50 25	00202 MNVR/CALIB REQUEST

      ENTR

3	F 59	PERFORM OPTICS CALIB

      OPT MODE - MAN (verify)
      OPTICS COUPLING - DIRECT
          SPEED - LOW
      OPT ZERO - OFF
      SUPERIMPOSE LLOS TO SLOS
      MARK

4	F 06 87	R2 TRUNNION ANGLE BIAS (.001°)

      (repeat until 2 measurements
      agree within .003°)

  (ACCEPT)   PRO
  (REJECT)   V32E to 3

5	F 51	V37E XXE

      OPT ZERO - ZERO

P23 - CISLUNAR MIDCOURSE NAV MEASUREMENT
(AUTO MANEUVER FIRST)

If alt above earth or moon <432 am, do not
mark on secondary body.

    CMC - on
    SCS - on
    ISS - on & aligned
    G/N PWR OPTICS - on (30 min prior)
    OPT ZERO - ZERO (verify)
    OPT MODE - CMC
    RCDR - LBR/RCD/FWD (Verify)

1   V37E 23E
    F 05 70   STAR ID/LMK ID/HOR ID   (OCTAL)
           Load codes

STAR/ENH	STAR/LNH	STAR/EL
000DE	000DE	000DE
00000	00000	00100
00110	00210	00000

STAR/EFH	STAR/LFH	STAR/LL
000DE	000DE	000DE
00000	00000	002XX
00120	00220	00000

(STAR/LMK) PRO to 2 (XX≠00 to 3)
(STAR/HOR) PRO to 3

2   F 06 89   LAT,LONG/2,ALT(LMK) (.001°,.001°,.01nm)
            Load lmk coords
            PRO

3   F 50 25   00202 MNVR REQUEST
            PRO

4   F 50 18   REQUEST MNVR TO FDAI RPY ANGLES (.01°)
    (AUTO)   SC CONT - CMC
            CMC MODE - AUTO
        PRO
   (BYPASS MNVR/TRIM) - ENTR to 7
                (If no cal go to 6)

P23

5   06 18   AUTO MNVR TO FDAI RPY ANGLES   (.01°)
          AUTO MNVR complete return to 4
            MAN MNVR - V62E
            RHC - NULL ERROR NEEDLES Return to 4

6   F 59   REQUEST OPTICS CALIB
            OPT MODE - CMC (verify)
            OPT ZERO - OFF
            ENTR (Until step 10,auto mnvr repeat -
                        V94E to 4)
               *F 05 09 00404 (TA>90°) *
               *V94E to 4 (AUTO MNVR)   *
               * or MAN MNVR - PRO to 7 *

7   06 92   AUTO OPTICS SHAFT,TRUN   (.01°,.001°)
              *PROG ALARM   *
              *V5N9E - 00407 (TA >50°)   *
              *V94E to 4 (AUTO MNVR)   *
             *or MAN MNVR - KEY RLSE to 7 *

            MNVR TO POSITION LMK/HOR IN FOV
            OPT MODE - MAN

8   F 51   REQUEST MARK
            OPTICS COUPLING - RESOLVED
                   SPEED - LOW
            SUPERIMPOSE STAR ON LMK/HOR
            MARK

9   F 50 25   00016 TERMINATE MARKS
            (MARK REJECT) To 8
            (TERM)   PRO

10 F 05 71   STAR ID/LMK ID/HOR ID   (OCTAL)
            Verify codes
            (STAR/LMK) PRO to 11 (LMK XX≠00 to 12)
            (STAR/HOR) PRO to 12

11 F 06 89   LAT,LONG/2,ALT(LMK) (.001°,.001°,.01nm)
            Verify coords
            PRO

12   F 06 49   ΔR,ΔV (SV Para)   (.1nm,.1fps)
                   Record data (R1&R2)
                   Wait 30 sec
                   V1 N1E
                     2754E
                   Record data (R1-Trun in octal)
                   Wait 30 sec
                   KEY RLSE
                   N38E (hr,min,.01sec)
                   Record MARK TIME
                   KEY RLSE
       (REJECT i.e. ΔR,ΔV≤0050.0)   V37E 23E to 1
       (UPDATE)   PRO

13   F 37   23E to 1
                or 00E
                     OPT ZERO - ZERO

(handwritten margin notes: Basic Date — Nov. 6, 1968 / Changed — Dec. 11, 1968 / Basic 1/6/69 / Ch. 13/n/69)

P23 (side tab)

P30-39 (side tab)

P23 - CISLUNAR MIDCOURSE NAV MEASUREMENT
           (AUTO OPTICS FIRST)
If alt above earth or moon <432nm do not
mark on secondary body.
           CMC - on
           SCS - on
           ISS - on & aligned
           G/N PWR OPTICS - on (30 min prior)
           OPT ZERO - ZERO (verify)
           OPT MODE - CMC
           RCDR - LBR/RCD/FWD (Verify)

1   V37E 23E
   F 05 70   STAR ID/LMK ID/HOR ID   (OCTAL)
               Load codes

STAR/ENH	STAR/LNH	STAR/EL
000DE	000DE	000DE
00000	00000	00100
00110	00210	00000

STAR/EFH	STAR/LFH	STAR/LL
000DE	000DE	000DE
00000	00000	002XX
00120	00220	00000

      (STAR/LMK)   PRO to 2 (XX≠00 to 3)
      (STAR/HOR)   PRO to 3

2   F 06 89   LAT,LONG/2,ALT(LMK) (.001°,.001°,.01nm)
               Load lmk coords
               PRO

3   F 50 25   00202 MNVR/CALIB REQUEST
               ENTR

4   F 59   REQUEST OPTICS CALIB
               OPT MODE - CMC (verify)
               OPT ZERO - OFF
               ENTR
                    F 05 09 00404 (TA>90°)
                    *V94E to 6 (AUTO MNVR) *
                    or MAN MNVR - PRO to 5

P23 (side tab)

```
5       06 92    AUTO OPTICS SHAFT,TRUN      (.01°,.001°)
                         *PROG ALARM                          *
                         *V5N9E-00407(TA>50°)                 *
                         *V94E to 6 (AUTO MNVR)               *
                         *or MAN MNVR - KEY RLSE to 5 *
                 V94E

6    F 50 18    REQUEST MNVR TO FDAI RPY ANGLES   (.01°)
                 V62E
                (AUTO)    SC CONT - CMC
                          CMC MODE - AUTO
                 PRO
                (MAN MNVR)SC CONT - SCS
                    or CMC MODE - HOLD or FREE to 6
                          (For recalc - PRO as desired)
                (BYPASS MNVR/TRIM) - ENTR - To 8

7       06 18    AUTO MNVR TO FDAI RPY
                 AUTO MNVR complete - To 6
                  or RHC - NULL ERROR NEEDLES - To 6   (.01°)

8       06 92    AUTO OPTICS SHAFT,TRUN      (.01°,.001°)
                 MNVR TO POSITION LMK/HOR IN FOV
                          OPT MODE - MAN

9    F 51        REQUEST MARK
                (MNVR)    V94E - To 6
                (MARK)    OPTICS COUPLING - DIRECT
                                 SPEED - LOW
                          SUPERIMPOSE STAR ON LMK/HOR
                          MARK

10   F 50 25    00016 TERMINATE MARKS
                (MARK REJECT) To 9
                (TERM)        PRO

11   F 05 71    STAR ID/LMK ID/HOR ID          (OCTAL)
                 Verify codes
                (STAR/LMK)  PRO - To 12 (LMK XX≠00 to 13)
                (STAR/HOR)  PRO - To 13
```

```
12   F 06 89    LAT,LONG/2,ALT(LMK) (.001°,.001°,.01nm)
                 Verify coords
                 PRO

13   F 06 49    ΔR,ΔV (SV Para)              (.1nm,.1fps)
                 Record data (R1&R2)
                 Wait 30 sec
                 V1N 1E
                   2754E
                 Record data (R1-Trun in octal)
                 Wait 30 sec
                 KEY RLSE
                (REJECT i.e. ΔR,ΔV>0050.0)V37E 23E to 1
                (UPDATE)  PRO

14   F 37        23E to 1
                  or 00E

                      OPT ZERO - ZERO
```

P30-39

P23

P23 CISLUNAR MIDCOURSE NAV MEASUREMENT
(IMU NOT AVAIL)

If alt above earth or moon <432nm, do not
mark on secondary body

CMC - on
SCS - on
G/N PWR OPTICS-in(30min prior)
OPT ZERO - ZERO (verify)
OPT MODE - MAN
RCDR-LBR/RCD/FWD(verify)

1

F 59

V37E 23E
REQUEST OPTICS CALIB
    OPTICS ZERO - OFF
ENTR

2 F 51

SIGHTING MARK ROUTINE
a. MNVR S/C to acquire LMK in center
   of Sct & LLOS

b. Tel Trun - 25° (To increase star
   acquisition potential) Note:(1) Only
   shaft control available (2) LMK will
   now appear at 0° position on R line

c. Acquire star in SCT by rotating shaft.
   Line up R line on star read trun
   angle on mech. counter.

d. SCT MODE - Slave to SXT. Set trun to
   angle observed in SCT. This will
   roughly align SLOS and SCT on star.
   Star will also move to 0° MSCT. Now
   star (through SLOS) and landmark
   (through LLOS) should be seen
   through SXT.

P23

---

e. Tracking procedures - Position S/C
   to put vertical lines of sextant
   recticle perpendicular to horizon
   (or centered on LMK). Use min
   impulse control. Use optics control
   (resolved and low) to place star on
   horizon (or center if LMK) and in
   middle of double lines.

MARK

Basic Date Nov. 6, 1968
Changed Dec. 11, 1968

Basic Date Nov. 6, 1968
Changed Dec. 11, 1968

3 F 50 25   R1 00016 Terminate Marks
      (MARK REJECT) To 2
      (TERM) PRO

4   05 71   STAR ID/LMK ID/HOR ID   (Octal)
      Verify Codes
      (STAR/LMK) PRO To 5 (LMK XX≠00 to 6)
      (STAR/HOR) PRO To 6

5 F 06 89   Lat, Long/2, Alt(LMK)   (.001°,.001°,.01nm)
      Verify Coords
      PRO

F 06 49 ΔV, ΔV (SV Para)   (.1nm,.1fps)
      Record data (R1 & R2)
      Wait 30 sec
      V1 N1E
       2754E
      Record data (R1 - Trun in octal)
      Wait 30 sec
      KEY RLSE
      N38E   (hr,min,.01sec)
      Record MARK TIME
      KEY RLSE

(REJECT i.e. ΔR, ΔV > 0050.0) V37E 23E to 1
(UPDATE) PRO

P30-39

P40,61,67

P27 CMC UPDATE

    CMC - on (req)

Auto Update:

    V37E 00E

        UP TLM CM - ACCEPT

        Note: UPTLM(LEB) always ACCEPT

        UPLINK ACTY lt - on

           * POSS LOS before completion *

           * If V33 N02 showing: *

           *   Key PRO   *

           *   UPLINK ACTY lt - out *

           *   P00 displayed   *

           * If V21 N01   *

           * or V21 N02   *

           *   Key V34E   *

           *   UPLINK ACTY lt - out *

           *   P00 displayed   *

           * UP TLM CM - BLOCK   *

Update complete:

        UPLINK ACTY lt - out

    V37E 00E

        UP TLM CM - BLOCK

1

P27

Voice Transmission Update:

1.   V37E 00E

2.   V70E LIFT-OFF TIME
or V71E LOAD DATA CONSEC ADD
or V72E LOAD DATA IN NON CONSEC
or V73E LOAD CMC TIME

3.   P27 Displayed

4.   F 21 01   R3 UPDATE BUFFER ADD (initially 304)
R1 Data E (R3 Increments)
    (If change - To 6)
Repeat Step 4 for all data

5.   F 21 02   R3 330
(Verify Data) V1 N1E
             R3 304E
             R1 Verify Data
             N15E (R3 305)
             R1 Verify Data
             Consecutive ENTR's display
               remaining comps. Note octal
               ident (01-24) of comps which
               need change
             KEY REL To 6

6.   F 21 02   R3 330
(CHANGE) Load octal ident, XXE to 4
(ACCEPT UPDATE) PRO

7.   P00 Displayed

P23

Basic Date Nov. 6, 1968 Changed

Basic Date Nov. 6, 1968 Dec. 13, 1968 Changed

CSM 1

CSM 103

P30-39

P30 EXTERNAL ΔV
If uplinked REFSMMAT, do P52 (PREF OPT)
                     before P30

1.   V37E 30E
    F 06 33   GETI   (hrs,min,.01sec)
          Load desired GETI
          PRO

2.   F 06 81   ΔVXYZ(LV)   (.1fps)
          Load desired ΔV's
          PRO

3.   F 06 42   HA,HP,ΔV(REQ)   (.1nm,.1nm,.1fps)
          PRO

4.   F 16 45   M,TFI,MGA   (0,min-sec,.01°)
          PRO (MGA set to -00002 if
               REFSMMAT Flag not set)
          Set DET

5.   F 37
        Note: For Closest Point of Approach,
                Load LOI TIG & ΔV=0,.1,0

P31 GENERAL LAMBERT PRETHRUST
        TARG PARAMS - LOADED FROM GND (P27)

1.   V37E 31E
    F 06 33   GETI   (hrs,min,.01sec)
          Load desired GETI
          PRO

2.   F 06 81   ΔVXYZ(LV)   (.1fps)
           PRO

3.   F 06 42   HA,HP,ΔV (REQ)   (.1nm,.1nm,.1fps)
          PRO

4.   F 16 45   M, TFI, MGA   (0,min-sec,.01°)
          PRO (MGA set to -00002 if
               REFSMMAT Flag not set)
          Set DET

5.   F 37

P40,41,47

P34 TPI PRETHRUST (P74 LM)

1   V37E (34E or 74E)

   F 06 37   TIG (TPI)   (hrs,min,.01sec)
              Load desired TIG
              PRO

2   F 06 55   R2 ELEV ANG, R3 wt   (.01°,.01°)
              Load desired values
              +00000 in R2 to CALC ELEV
              ANGLE AT TIG TIME)
              PRO

3   F 16 45   MARKS,TFI,-00001   (min-sec)
          (RECYCLE)   V32E
          (FINAL PASS) PRO (Term Marking)

                F 05 09 (00611 NO SOL)
                *PRO To 1   *

4   F 06 37   TIG (TPI)   (hrs,min,.01sec)
              (IF ELEV ANGLE COMPUTED BY CMC
              THIS DISPLAY WILL BE REPLACED
              BY F 06 55 AS IN 2 ABOVE)
              PRO

5   F 06 58   HP,ΔV(TPI,.ΔV(TPF)   (.1nm,.1fps,.1fps)
              PRO (If Recycle - To 7)
                (If Final - To 6)

6   F 06 81   ΔVXYZ(LV)TPI   (.1fps)
              (For Out-Of-Plane Corr in final Comp only)
              Key V90E
           F 06 16 GET EVENT   (hrs,min,.01sec)
            PRO
           F 06 90 Y,YDOT,PSI (.01nm,.1fps,.01°)
            RECORD YDOT _____
            PRO
           INSERT-YDOT in R2 of ΔV TPI
                * LOAD OF NEW DATA INTERRUPTED *
                * BY F06 49, F50 18 OR RESTART *
                *   HANDLE INTERRUPTION   *
                *   RELOAD DATA WHEN   *
                *   N81 REAPPEARS   *
           PRO

7   F 06 59   ΔVXYZ(LOS)TPI   (.1fps)
              PRO (If Recycle - To 3)

8   F 16 45   MARKS,TFI,MGA   (marks,min-sec,.01°)
              PRO (MGA SET To -00002 IF NO
                REFSMMAT SET or If P74)

9   F 37

      P74 - Transmit Mnvr Parameters To LM

P35 TPM PRETHRUST (P75 LM)

1   V37E (35E or 75E)
    F 16 45   MARK,TFI,-00001   (marks,min-sec)
            (RECYCLE) V32E To 3
            (FINAL PASS) PRO (Terminate Marking)

2   F 06 81   ΔVXYZ(LV)TPM   (.1fps)
            (For Out-of-Plane Corr
              V90E
              F 06 16 GET EVENT   (hrs,min,.01sec)
              PRO
              F 06 90 Y,YDOT,PSI (.01nm,.1fps,.01°)
              RECORD YDOT ———————
              PRO
            ZERO Out-of-Plane Corr (R2) on First TPM)
                  * LOAD OF NEW DATA INTERRUPTED *
                  * BY F06 49, F50 18 OR RESTART *
                  *   HANDLE INTERRUPTION   *
                  *   RELOAD DATA WHEN   *
                  *   N81 REAPPEARS   *
    PRO

3   F 06 59   ΔVXYZ(LOS)TPM   (.1fps)
            PRO (If Recycle - To 1)

4   F 16 45   MARKS,TFI MGA   (marks,min-sec,.01°)
            PRO (MGA SET TO -00002 IF NO
                 REFSMMAT SET or If P75)

5   F 37

        P75 - Transmit Mnvr Parameters To LM

P37 RETURN TO EARTH PROGRAM

1   V37E 37E
    F 06 33   TIG   (hrs,min,.01sec)
            Load desired TIG
            PRO

2   F 06 60   BLANK,V PRED,GAMMA EI   (1fps,.01°)
            Load desired values
            For Min ΔV: Load +00000 in R2
            For Mid-corridor: Load +00000 in R3
            PRO
                    *F 05 09 00605-Solution Not   *
                    *   Convergent   *
                    *   00612-State Vector in *
                    *   Lunar Influence *
                    *   *
                    *V32E,RSET To 1   *

3   F 06 61   IMPACT LAT, IMPACT LONG   (.01°)
            (RECYCLE) V32E To 1
            PRO

4   F 06 39   ΔT TRANSFER   (hrs,min,.01sec)
            (RECYCLE) V32E To 1
            PRO

5   F 06 60   BLANK, V400K, GAMMA EI   (fps,.01°)
            (RECYCLE) V32E To 1
            PRO

6   F 06 81   ΔVXYZ(LV) TIG   (.1fps)
            PRO (To 3 on first pass)
                    *F 05 09 00605 Solution Not *
                    *   Convergent   *
                    *   00613 Flt Path Angle*
                    *   Not Reached   *
                    * RSET   *
                    * V32E To 1   *

Basic Date Nov. 6, 1968 Changed

Basic Date Nov. 6, 1968 Changed Dec. 13, 1968

7   F 04 06   THRUST OPTION (Do not key V82 during this
                                                    display)

    R1 00007
    R2 0000X
     X=1(SPS)
      2(RCS)
    PRO

8   F 06 33   TIG   (hrs,min,.01sec)
    PRO

9   F 16 45   MARK,TFI MGA   (mark,min-sec,.01°)
    PRO (MGA SET TO -00002 If No
     REFSMMAT SET)

10   F 37   (40E or 41E)

P38 SOR TARGETING (P78 LM)
If P20 in background, do not start
 rend mark routine (V57,V54) until
 step 4

1   V37E (38E or 78E)
  F 06 33   TIG (SOR)   (hrs,min,.01sec)
  Load desired TIG
  PRO

2   F 06 55   R3 ωt   (.01°)
  Load desired ωt
  PRO

3   F 04 06   R1 00005 Specify Phase Option
   (Do not key V82 during this display)
  R2 0000X X=1 or 2
  PRO (To 6 If R2=2)

4   F 06 57   ΔR SOR   (.1nm)
  Load desired ΔR
  PRO

5   F 06 34   SOR TIME   (hrs,min,.01sec)
  PRO

6   F 16 45   MARK,TFI,-00001   (mark,min-sec,.01°)
  (RECYCLE) V32E
  (FINAL PASS) PRO (Terminate Marks)

7   F 06 58   HP(SOR),ΔV(SOR),ΔV(SOR-FINAL)
  PRO   (.1nm,.1fps,.1fps)

8   F 06 81   ΔVXYZ(LV)   (.1fps)
  PRO (If Recycle - To 6)

9   F 16 45   MARKS,TFI MGA   (marks,min-sec,.01°)
  PRO (MGA SET TO -00002 IF NO
   REFSMMAT SET OR P78)

10   F 37

Transmit Mnvr Parameters To LM

P39 STABLE ORBIT MID (P79 LM)

1   V37E (39E or 79E)

2 F 16 45 MARK,TFI,-00001   (mark,min-sec,.01°)
       (RECYCLE) V32E
       (FINAL PASS) PRO (Terminate Marks)

3 F 06 81 ΔVXYZ(LV)   (.1fps)
       PRO (If Recycle - To 2)

4 F 16 45 MARK,TFI,MGA   (mark,min-sec,.01°)
       PRO (MGA SET TO -00002
         IF NO REFSMMAT SET or P79)

5 F 37

    Transmit Mnvr Parameters To LM

P77

P30-39

P23

Nov. 6, 1968
Basic Date
Changed

Dec. 13, 1968
Changed

CSM 103

CSM 10

SPS THRUSTING (P40)

  P30 or P37 Complete
  CMC - on
  ISS - on
  SCS - OPERATING
  TEST C/W LAMPS
  EMS MODE - STBY
  EMS FUNC - ΔV SET
  SET ΔV ind To 1586.8 fps
  EMS MODE - AUTO
  EMS FUNC - ΔV TEST
   SPS THRUST LIT - on/off (10 sec)
   ΔV ind. stops at -20.8 ± 20.7
  EMS MODE - STBY
  EMS FUNC - ΔV SET
  SET ΔVC
  EMS FUNC - ΔV
  NONESS BUS - MNB

  Cycle CRYO Fans

  BMAG MODE (3) - RATE 2
  ΔVCG - CSM
  CMC MODE - FREE
  AUTO RCS SELECT (16) - As req'd for
             ullage
  LOAD DAP
  ROT CONTR PWR NORM (both) - AC/DC
  DET SET
V37E 00E
  SC CONT - CMC
  CMC MODE - AUTO

LOI MODE I AUTO

P40,41,47

MNVR TO PAD BURN ATT

1   V62E

2   V49E

3 F 06 22   DESIRED FINAL GMBL ANGLES   (.01°)
               LOAD MNVR PAD GMBL ANGLES
          PRO

4 F 50 18   REQ MNVR TO FDAI RPY ANGLES   (.01°)
        (AUTO)   PRO
        (MAN)   SC CONT - SCS
               MNVR to 6

5   06 18   AUTO MNVR TO FDAI RPY ANGLES   (.01°)

6 F 50 18   REQ TRIM TO FDAI RPY ANGLES   (.01°)
        (AUTO TRIM) PRO to 5
        (BYPASS)   ENTR

7   **BORESIGHT & SXT STAR CHECK**
               OPT MODE - CMC
               OPT ZERO - OFF

8   V41 N91E

9 F 21 92   SHAFT, TRUN   (.01°,.001°)
          LOAD SXTS angles

10   41   OPTICS DRIVE

          CHECK SXT STAR
               Drive Trunnion to <5°
               OPT ZERO - ZERO
               G/N PWR OPTICS - OFF

          CHECK BORESIGHT STAR (If avail)

Left margin markers: P27, P30-39, P40,41,47, P23

Center spine: Basic Date Nov. 6, 1968 · Changed Dec. 13, 1968 · Nov. 6, 1968 · Changed Dec. 6, 1968 · 103 · 103

---

11   V37E 40E

12 F 50 18   REQUEST MNVR TO FDAI RPY ANGLES (.01°)
        (AUTO)   BMAG MODE (3) - RATE 2
               SC CONT - CMC
               CMC MODE - AUTO
          PRO to 13
      (MAN/DAP) BMAG MODE (3) - RATE 2
               SC CONT - CMC
               CMC MODE - HOLD
               MNVR to 14
      (MAN/SCS) SC CONT - SCS
               MNVR to 14

13   06 18   AUTO MNVR TO FDAI RPY ANGLES   (.01°)

14 F 50 18   REQUEST TRIM MNVR TO FDAI RPY ANGLES
          ALIGN S/C ROLL   (.01°)
          GDC ALIGN

          TVC CHECK & PREP
               STAB CONT SYS cb (Pnl 8) - close
               SPS cb (12) - close
               DEADBAND - MIN
               RATE - LOW
               LIMIT CYCLE - ON
               MAN ATT (3) - RATE CMD
               BMAG MODE (3) - ATT1/RATE 2
               ROT CONTR PWR DIRECT (both) - OFF
               SCS TVC (2) - RATE CMD
                    If SCS, SCS TVC (2) - AUTO
               *   SC CONT - SCS   *
               TVC GMBL DRIVE P&Y - AUTO
               MN BUS TIES (both) - ON
               TVC SERVO PWR 1 - AC1/MNA
                          2 - AC2/MNB
               TRANS CONTR PWR - ON
               ROT CONTR PWR NORMAL 2 - AC
               RHC #2 - ARMED

+54:00m
(-06:00)

55:00m
(-05:00)

PRIMARY TVC CHECK
    GMBL MOT P1-Y1-START/ON(LMP confirm)
       If SCS, verify Thumbwheel Trim
    THC - CW
    Verify NO MTVC

SEC TVC CHECK
    GMBL MOT P2-Y2-START/ON (LMP confirm)
    SET GPI TRIM
    Verify MTVC
    THC NEUTRAL
     GPI returns to 0,0(CMC) or trim (SCS)
    ROT CONT PWR NORM 2 - AC/DC

(TRIM)   Go to step 12
(BYPASS) BMAG MODE (3) - ATT1/RATE 2 (verify)
     ENTR

15 F 50 25 00204 GMBL TEST OPTION
    (ACCEPT) SC CONT - CMC (verify)
         PRO

         Monitor GPI Response:
           00,20,-20,00,02,0-2,00,Trim
            *TEST FAIL: *
            *SC CONT - SCS   *
            SCS TVC (2) - AUTO

    (REJECT) ENTR

16   06 40   TFI,VG,ΔVM   (min-sec,.1fps)
            PROG ALM - TIG Slipped
            *V5N9E 01703   *
            *KEY RLSE To 16   *
       ROT CONTR PWR DIRECT (both) - MNA/B
       SPS He VLVS (both) - AUTO (verify)
       LIMIT CYCLE - OFF
       FDAI SCALE - 50/15
       SPS P2,Y2 cb - open (for crit. burn)

58:00
(-02:00)
    ΔV THRUST A&B) - NORMAL
    THC - ARMED
    RHC (both) - ARMED
    TAPE RCDR - RECORD/STOP/HBR/FWD

59:25
(-00:35)
    DSKY BLANKS

59:30
(-00:30)
    (AVE G ON)
    FLT RCDR - RECORD
    EMS MODE - AUTO

06 40 TFI,VG,ΔVM   (min-sec,.1fps)
        CHECK PIPA BIAS < 2fps for 5 sec

59:XX
(-00:XX)
    ULLAGE AS REQ

      *IF NO ULLAGE
      DIR ULLAGE PB - PUSH
      *CONTROL ATT W/RHC   *

    MONITOR ΔVM (R3) COUNTING UP

59:55
(-00:05)
F 99 40   ENG ON ENABLE REQUEST
           (AUTO IGN)   PRO AT TFI $\geq$0 Sec
           (BYPASS IGN) ENTR To 19
                        ~~V34E~~ - EXIT V37E 00E

17 00:00   IGN   * IF SCS - THRUST PB - PUSH *

    06 40   TFC,VG,ΔVM   (min-sec,.1fps,.1fps)
                      * F 97 40   SPS Thrust fail *
                      * ~~(TERM)   V34E EXIT~~   *
                          TVC
                      * (RESTART)PRO to IGN   *
                      * (RECYCLE ENTR to TIG-05 sec *
             SPS THRUST LITE - ON ΔV THRUST B(A) - NORMAL
             MONITOR THRUSTING
               Pc 95-105 psia
               EMS COUNTING DOWN
               SPS INJ VLVS (4) - OPEN
               SPS He VLVS tb - gray
               SPS FUEL/OXID PRESS - 175-195 psia
               PUGS - BALANCED
                    * PROG ALARM   *
                    * V5 N9E 01407 VG INC   *
                    * LOI & TEI   *
                    *   THC-CW, FLY MTVC   *
                    * LOI$_2$ & MCC   *
                    * ΔV THRUST A/B-OFF *

    00:XX ECO

                    * EMER SPS CUTOFF: *
                    * ΔV THRUST A/B-OFF *
                    * LOI - BT +6 sec   *
                    * LOI$_2$- BT +1 sec   *
                    * TEI - BT +2 sec &   *
                    * ΔV CTR <-40 fps   *

18 F 16 40   TFC(STATIC),VG,ΔVM   (min-sec,.1fps)
               ΔV THRUST A&B - OFF
               VERIFY THRUST OFF
                 SPS INJ VLVS (4) - CLOSED
                 SPS He TB (2) - BP

(margin left): P37 P30-39 P40 41 47 P23

(center spine): Basic Date Changed Nov. 6, 1968 Dec. 4, 1968 Basic Date Changed Nov. 6, 1968 Dec. 13, 1968 CSM 103

           SPS P2,Y2 cb - closed
           GMBL MOTS (4) - OFF (LMP Confirm)
           TVC SERVO PWR 1&2 - OFF
           FLT RCDR - OFF
           MN BUS TIES (both) - OFF
    PRO

19 F 16 85   VG XYZ(CM)   (.1fps)
               NULL RESIDUALS (TEI & MCC)
               RECORD ΔV CTR & RESIDUALS
               EMS FUNC - OFF
               EMS MODE - STBY
               BMAG MODE (3) - RATE 2
               DEADBAND - MAX
               TAPE RCDR - STOP
               NONESS BUS - OFF
               TRANS CONT PWR - OFF
               ROT CONTR PWR DIRECT - OFF
               SPS P1&2,Y1&2 cb - open
    PRO

20 F 37   V82E

21 F 16 44   HA,HP,TFF   (.1nm,min-sec)
               R3-59B59 HP >49.4 nm/35K ft
    PRO

22 F 37   00E

23   V66E

BURN STATUS REPORT			
____ ΔTIG		____ VI	
____ BT		____ HDOT	
____ VGX		____ H	
____ R		____ ΔVC	
____ P		____ FUEL	
____ Y		____ OXID	
		____ UNBAL	
REMARKS			

(margin right): LOI MODE I ABORT   P51-54

RCS THRUSTING (P41)
    P30 or P37 Complete
    CMC - on
    ISS - on
    SCS - OPERATING
    TEST C/W LAMPS
    EMS MODE - STBY
    EMS FUNC - ΔV SET
    SET ΔV ind to 1586.8 fps
    EMS MODE - AUTO
    EMS FUNC - ΔV TEST
      SPS THRUST Lt - on/off
      ΔV ind stops at −20.8 ± 20.7(10 sec)
    SET ΔVC
    EMS FUNC - ΔV
    BMAG MODE (3) - RATE 2
    CMC MODE - FREE
    AUTO RCS SELECT (16) - As Req'd
    LOAD DAP
    ROT CONTR PWR NORMAL (both) - AC/DC
                 DIRECT (both) - MNA/B
    DET SET
V37E 00E
    SC CONT - CMC
    CMC MODE - AUTO

1   MNVR TO PAD BURN ATTITUDE
    V62E

2   V49E

3 F 06 22 DESIRED FINAL GMBL ANGLES   (.01°)
            LOAD MNVR PAD GMBL ANGLES
            PRO

4 F 50 18 REQ MNVR TO FDAI RPY ANGLES   (.01°)
    (AUTO) PRO
    (MAN)   SC CONT - SCS
            MNVR To 6

(left margin, vertical) P30-39   17   P23

(center margin, vertical) Nov. 6, 1968   Dec. 13, 1968   Basic Date   Changed   CSM 103

---

5   06 18   AUTO MNVR To FDAI RPY ANGLES   (.01°)

6 F 50 18 REQ TRIM To FDAI RPY ANGLES   (.01°)
    (AUTO TRIM) PRO To 5
    (BYPASS)   ENTR

7   BORESIGHT & SXT STAR CHECK
        OPT MODE - CMC
        OPT ZERO - OFF

8   V41 N91E

9 F 21 92 SHAFT, TRUN   (.01°,.001°)
        LOAD SXTS angles

10   41   OPTICS DRIVE

        CHECK SXT STAR
          Drive Trunnion to <5°
          OPT ZERO - ZERO
        CHECK BORESIGHT STAR (If avail)

11   V37E 41E

12 F 50 18 REQUEST MNVR TO FDAI RPY ANGLES (.01°)
    (AUTO)   BMAG MODE (3) - RATE 2
            SC CONT - CMC
            CMC MODE - AUTO
            PRO To 13
    (MAN/DAP) BMAG MODE (3) - RATE 2
            SC CONT - CMC
            CMC MODE - HOLD
            MNVR To 14
    (MAN/SCS) SC CONT - SCS
            MNVR To 14

13   06 18   AUTO MNVR TO FDAI RPY ANGLES   (.01°)

(center margin, vertical) Nov. 6, 1968   Dec. 4, 1968   Changed   CSM 103

(right margin, vertical) LOI MODE I ABORT   P51-54

14 F 50 18   REQUEST MNVR TO FDAI RPY ANGLES (.01°)
     (AUTO TRIM) BMAG MODE (3) - RATE 2
                   ALIGN SC ROLL
                   SC CONT - CMC
                   CMC MODE - AUTO

            PRO To 13
     (BYPASS)   DEADBAND - MIN
                RATE - LOW
                MAN ATT (3) - RATE CMD
                BMAG MODE (3) - ATT1/RATE 2
                GDC ALIGN

            ENTR

15   06 85   VG X,Y,Z   (.1fps)

                    * PROG Alarm lt   *
                    * V5N9E - 01703 - TIG SLIPPED *
                    * KEY RLSE To 15   *

        55:00
       (-05:00)   TRANS CONT PWR - on (up)
                   HAND CONTROLLERS - ARMED

        59:25
       (-00:35)   DSKY BLANKS

(left margin vertical): P30-39   P40 41 47   P23

(center vertical labels):
Nov. 6, 1948 Basic Date Changed
Dec. 4, 1968
Nov. 6, 1968 Basic Date Changed
Dec. 13, 1968
6M 103   103

        59:30
       (-00:30)
16   16 85   V X,Y,Z (AVE G ON)
                   TAPE RCDR - CMD RSET/HBR/RECORD/FWD
                   LIMIT CYCLE - OFF
                   EMS MODE - AUTO

        00:00
17   F 16 85   VG X,Y,Z   (.1fps)
                NULL COMPONENTS
                RECORD ΔV COUNTER & RESIDUALS
                   TAPE RCDR - STOP
                   HAND CONTROLLERS - LOCKED
                   EMS FUNC - OFF
                   EMS MODE - STBY
                   TRANS CONT PWR - OFF
                   BMAG MODE (3) - RATE 2
                PRO

18   F 37   V82E

19   F 16 44   HA,HP,TFF   (.1nm,min-sec)
                    * R3-59B59 HP>49.4 nm/35K ft *
                PRO

20   F 37   00E

21   V66E

(right margin vertical): LOI MODE I ABORT   P51-54

BURN STATUS REPORT		
_____ ΔTIG	_____ VI	
_____ BT	_____ HDOT	
_____ VGX	_____ H	
_____ R	_____ ΔVC	
_____ P	_____ FUEL	
_____ Y	_____ OXID	
	_____ UNBAL	

REMARKS

P47 Thrust Monitor Program

```
            CMC - on
            ISS - on & aligned
            G/N PWR OPTICS - OFF

1           V37E 47E
   F 16 83  ΔV XYZ(CSM)                              (.1fps)
                 * VI,HDOT,H available by N62E      *
                 * KEY RLSE to return to N83        *
                 * In lunar orbit, add 2500nm to H*

   (RECYCLE) V32E
   (TERM)    PRO

2  F 37      XXE
```

LOI MODE I ABORT

```
ABORT - Stop Clock
ΔV Thrust A/B - OFF
Verify Thrust Off
    SPS INJ VLVS(4) -CLOSED
    SPS He  tb(2)-bp
GMBL MOTS(4)-OFF (LMP Verify)
TVC SERVO PWR 1&2 - OFF
FLT RCDR - OFF
TAPE RCDR - STOP/LBR/FWD
SC CONT-SCS
```

RECORD DATA AND COMPUTE PAD

```
F 97 40                              PRIMARY
   Record TFC  59  59      G&N ΔVm _____
           Vg _____      VcABORT(Chart)_____
           Vm _____     GET LOI₁ _____
       EMS Vc _____     Bt Watch + _____
   ENTR                                   +15:00
F 99 40                     GET TEI ABORT __:__
Maneuver to LOI₁ Attitude   Bt ABORT_____
   ENTR                        from Nomigram for Vc
F 16 85                      ABORT P&Y TRIM(Chart)
   Record Vx _____
           Vy _____           ALTERNATE
           Vz _____      ΔVcLOI₁ PAD _____
   PRO                      EMS Vc(Shutdown)_____
F37 V82E                       Vc(Burned)_____
                               Vc ABORT(Chart)_____



F 16 44
   Record H_A _____
           H_p _____
           TFF_____

   PRO
F 37 00E
   V66E
```

MAN ATT PITCH - ACCEL CMD
SET In GDC THUMBWHEELS - (177.9,27.9,1.6)
MAN MNVR To ABORT R,P,Y
GDC ALIGN
CHECK DAP (P&Y TRIM)
EMS FUNC - ΔV SET
SET ΔV$_c$ ABORT

TVC CHECK & PREP
STAB CONT SYS cb (Pnl 8)-Close
SPS cb (12) - close
Verify Rate - LOW
Limit Cycle - ON
MAN ATT(3)-RATE CMD
BMAG MODE(3)-ATT1/RATE2
ROT CONTR PWR DIR(2)-OFF
SCS TVC(2)-AUTO
TVC GMBL DRIVE P&Y-AUTO
VERIFY MN BUS TIES(2)-ON
TVC SERVO PWR 1 - AC1/MNA
TVC SERVO PWR 2 - AC2/MNB
TRANS CONTR PWR - ON
ROT CONTR PWR NORMAL #2-AC
RHC #2-ARMED

PRIMARY TVC CHECK
GMBL MOT P1-Y1-START/ON(LMP Verify)
THC-CW
VERIFY NO MTVC

SEC TVC CHECK
GMBL MOT P2-Y2-START/ON(LMP Verify)
SPS P2-Y2 cb's - open
SET GPI TRIM
Verify MTVC
THC NEUTRAL
Verify GPI Returns To Trim POS
ROT CONT PWR NORM 2 - AC/DC
Verify DEADBAND - MIN
ROT CONTR PWR DIR(2) - MNA/B

-5m

LOI MODE I ABORT

-2m

-10s
00

Basic Date Nov. 6, 1968 Changed Dec. 15, 1968
Basic Date Nov. 6, 1968 Changed Dec. 15, 1968

No Comm

SPS HE VLVS(2)-AUTO,Verify tb-bp
LIMIT CYCLE - OFF
Verify FDAI SCALE - 50/15
EMS MODE - AUTO
V37E 47E
ΔV THRUST A&B - NORMAL
Verify THC - ARMED
RHC (Both) - ARMED
TAPE RCDR - STOP/HBR/FWD
FLT RCDR - RECORD
ULLAGE
THRUST PB-PUSH
SPS THRUST LITE-ON
MONITOR THRUSTING
  Pc 95-105 psia
  EMS COUNTING DOWN
  SPS INJ VLVS(4)-OPEN
  SPS HE VLVS tb-GRAY
  SPS FUEL/OXID PRESS - 175 to 195 psi
ECO
 ΔV THRUST A/B - OFF
 VERIFY THRUST OFF
  SPS INJ VLVS(4)-CLOSED
  SPS He tb(2) - bp
  SPS P2-Y2 cb's - close
GMBL MOTS(4)-OFF (LMP Verify)
TVC SERVO PWR 1&2 - OFF
TAPE RCDR - OFF/LBR/FWD
FLT RCDR - OFF
NONESS BUS - OFF
BMAG MODE(3) - RATE 2
F 16 83
  RECORD Vx _____
        Vy _____
        Vz _____
  PRO
F37 00E
  V66E
EMS ΔV$_c$ _____

<u>P51 - IMU ORIENTATION</u>
  CMC - on
  ISS - on
  SCS - operating
  BMAG MODE (3) - RATE 2
  G/N PWR OPTICS - on (verify)
  OPT ZERO - ZERO (verify)
  OPT MODE - MAN

1		V37E 51E
	F 50 25	00015 MNVR TO ACQ STARS
		(Coarse Align IMU To 0,0,0) - ENTR to 2
		(BYPASS) PRO to 3
2	41 22	DESIRED GIMBAL ANGLES (0,0,0)
		NO ATT Lt - on then off, to 1
3	F 51	PLEASE MARK
		OPT ZERO - OFF
		MARK
4	F 50 25	00016 TERMINATE MARKS
		PRO
5	F 01 71	000DE STAR CODE
		Load desired code
		PRO to 3 after 1st MARK (to 6 if DE=00)
		to 7 after 2nd MARK (to 6 if DE=00)
6	F 06 88	CELESTIAL BODY VECTOR
		Load desired vector
		PRO to 3 after 1st MARK
		to 7 after 2nd MARK
7	F 06 05	STAR ANGLE DIFFERENCE (.01°)
		(RECYCLE) V32E to 1
		(ACCEPT) PRO
8	F 37	52E Bypass ZERO OPTICS
	or XXE	
		OPT ZERO - ZERO

Nov. 6, 1968
Dec. 13, 1968

Basic Date
Changed

CSM 3

P52 IMU REALIGN
Note: Do not key V82 during step 1 or 2
    CMC - on
    ISS - on
    SCS - operating
    BMAG MODE (3) - RATE 2
    G/N PWR OPTICS - on (verify)
    CMC MODE - FREE
    OPT ZERO - ZERO (verify)
    OPT MODE - CMC

1   V37E 52E
  F 04 06 R1 00001 IMU ALIGN OPTION
          R2 00001 PREF   PRO to 4
               2 NOM   PRO to 2
               3 REFSMMAT PRO to 5
               4 LDG SITE PRO to 2

2 F 06 34 GET ALIGN (0,0,0 initially) (hr,min,sec)
          Load desired GET
          TO SPECIFY PRESENT TIME - PRO on (0,0,0)
          PRO (NOM go to 4)

3 F 06 89 LAT, LONG/2, ALT   (.001°,.001°,.01nm)
          Load ldg site coords
          PRO

4 F 06 22 NEW ICDU ANGLES OG, IG, MG   (.01°)
        (IF MG>70°, MNVR) V32E - to 4
           PRO NO ATT Lt - on then off

5 F 50 25   00015 STAR SELECT
          (MNVR If Necessary)
          (PICAPAR) PRO
               *F 05 09 00405 NO PAIR   *
               (CREW SPECIFY) PRO - to 6
               *(PICAPAR) V32E to 5   *

          (MAN ACQ) ENTR

Nov. 6, 1968   Basic Date Changed

Nov. 6, 1968   Basic Date Changed

CSM   No Comm

6 F 01 70 000DE STAR CODE
          Load desired code
             OPT MODE - CMC (verify)
             OPT ZERO - OFF
          PRO to 8 (to 7 if DE=00)
               F 05 09 00404 (TA>90°)
               *MNVR - PRO To 8   *

7 F 06 88 CELESTIAL BODY VECTOR
          Load desired vector
          PRO
               F 05 09 00404 (TA>90°)
               *MNVR - PRO To 8   *

8   06 92 SHAFT, TRUN   (.01°,.001°)
               PROG ALARM (TA>50°)
               *V5N9E 00407   *
               *KEY RLSE   *
               *MNVR till R2<50000 *
      (MARK ROUTINE) OPTICS MODE - MAN

9 F 51   PLEASE MARK
          MARK

10 F 50 25 00016 TERMINATE MARKS
          PRO

11 F 01 71 000DE STAR CODE
          Load code (if necessary)
          PRO to 6 after 1st MARK (to 12 if DE=00)
              to 13 after 2nd MARK (to 12 if DE=00)

12 F 06 88 CELESTIAL BODY VECTOR
          Load vector
          PRO to 6 after 1st MARK
              to 13 after 2nd MARK

13   F 06 05   STAR ANGLE DIFFERENCE   (.01°)
                          If restart and 06 05 reappears
                          *with changed R1:   *
                          *V32E to 15   *
                          *PRO to repeat sightings   *
          (REJECT)   V32E to 15
          (ACCEPT)   PRO

14   F 06 93   TORQUING ANGLES OG, IG, MG   (.001°)
          (TORQUE)   PRO (CMC - FREE)
          (BYPASS)   V32E

15   F 50 25   00014 ALIGNMENT CHECK
          (RECHECK)   PRO To 5
          (BYPASS)   ENTR

16   F 37

                          OPT ZERO - ZERO
               XXE

(side notes, left margin, rotated)
TEI MODE 1 ABORT

P40 41 47

P51-54

(center margin, rotated)
Basic Date Nov. 6, 1968
Changed Dec. 13, 1968

Basic Date Nov. 6, 1968
Changed Dec. 13, 1968

CSM 103

CSM 103

P53 - BACKUP IMU ORIENT DETERMINATION
               CMC - on
               ISS - on
               SCS - operating
               MAN ATT (3) - MIN IMP
               COAS LOS DETERMINATION - Complete pg
                                                   G-74

1   V37E 53E
     F 50 25   00015 MNVR To ACQ STARS
          (BYPASS) Coarse Align IMU to 0,0,0) - ENTR to 2
                   PRO to 3

2   41 22   DESIRED GIMBAL ANGLES (0,0,0)
                  NO ATT Lt - on then off, to 1

3   F 06 94   ALT LOS OPT ANGS SHAFT, TRUN (.01°,.001°)
                  Load proper angles
                  PRO

4   F 53   PLEASE MARK
                  Center Target
                  ENTR

5   F 50 25   00016 TERMINATE MARKS
          (REJECT)   ENTR to 4
                     PRO

6   F 01 71   000DE STAR CODE
                  Load desired code
                  PRO to 3 after 1st MARK (to 7 if DE=00)
                        to 8 after 2nd MARK (to 7 if DE=00)

7   F 06 88   CELESTIAL BODY VECTOR
                  Load desired vector
                  PRO to 3 after 1st MARK
                        to 8 after 2nd MARK

8   F 06 05   STAR ANGLE DIFFERENCE   (.01°)
          (RECYCLE)   V32E to 1
          (ACCEPT)   PRO

9   F 37   XXE

(right margin, rotated) No Comm

P54 - BACKUP IMU REALIGN

Note: Do not key V82 during step 1 or 2
    CMC - on
    ISS - on
    SCS - operating
    MAN ATT (3) - MIN IMP
    COAS LOS DETERMINATION - complete pg
                                  G-74

1   V37E 54E
    F 04 06 R1 00001 IMU ALIGN OPTION
           R2 00001 PREF   PRO to 4
                 2 NOM   PRO to 2
                 3 REFSMMAT PRO to 5
                 4 LDG SITE PRO to 2

2   F 06 34   GET ALIGN (0,0,0 initially)(hr,min,sec)
           Load desired GET
           TO SPECIFY PRESENT TIME - PRO on (0,0,0)
           PRO (NOM go to 4)

3   F 06 89   LAT, LONG/2, ALT   (.001°,.001°,.01nm)
           Load ldg site coords
           PRO

4   F 06 22   NEW ICDU ANGLES OG, IG, MG   (.01°)
           (IF MG>70°, MNVR) V32E to 4
               PRO - NO ATT Lt - on then off

5   F 50 25   00015 STAR SELECT
           (Mnvr If Necessary)
           (PICAPAR) PRO
                   *F 05 09 00405 NO PAIR *
                   (CREW SPECIFY) PRO to 6
                   *(PICAPAR) V32E to 5   *
        (MAN ACQ) ENTR

6   F 01 70   000DE STAR CODE
           Load desired code
           PRO to 8 (to 7 if DE=00)

7   F 06 88   CELESTIAL BODY VECTOR
           Load desired vector
           PRO

8   F 06 94   ALT LOS OPT ANGS SHAFT, TRUN(.01°,.001°)
           Load angles
           PRO

9   F 53   PLEASE MARK
           Center Target
           ENTR

10   F 50 25   00016 TERMINATE MARKS
           (REJECT) ENTR to 9
           PRO

11   F 01 71   000DE STAR CODE
           Load code (if necessary)
           PRO to 6 after 1st MARK (to 12 if DE=00)
                to 13 after 2nd MARK (to 12 if DE=00)

12   F 06 88   CELESTIAL BODY VECTOR
           Load vector
           PRO to 6 after 1st MARK
                to 13 after 2nd MARK

13   F 06 05   STAR ANGLE DIFFERENCE   (.01°)
                   If restart and 06 05 reappears
                   *with changed R1:   *
                   *V32E To 15   *
                   *PRO to repeat sightings   *
        (REJECT) V32E to 15
        (ACCEPT) PRO

14   F 06 93   TORQUING ANGLES OG, IG, MG   (.001°)
           (TORQUE) PRO (CMC - FREE)
           (BYPASS) V32E

15   F 50 25   00014 ALIGNMENT CHECK
           (RECHECK) PRO to 5
           (BYPASS)   ENTR

16   F 37   XXE

P76 - TARGET ΔV

1		V37E 76E	
	F 06 84	ΔV XYZ	(.1fps)
		Load ΔV	
		PRO	
2	F 06 33	TIG	(hrs,min,.01sec)
		Load TIG	
		PRO	
3	F 37		

V41 N91 COARSE ALIGN OCDU's
          CMC - on
          ISS - on
          G/N PWR OPTICS - on
          OPT MODE - CMC
          OPT ZERO - OFF

1		V41N 91E	
2	F 21 92	SHAFT, TRUN NEW OCDU	(.01°,.001°)
		Load desired shaft and trun	
3	41	OPTICS DRIVE TO SPECIFIED ANGLES	

V41 N20 COARSE ALIGN ICDU's
          CMC - on
          ISS - on

		V41N 20E	
2	F 21 22	NEW ICDU ANGLES RPY	(.01°)
		Load desired ICDU angles	
3	41	NO ATT Lt - on	
		*POSS PROG ALARM	*
		V5 N9 211 Coarse align error	
		*Repeat V41 N20	*

V40 N20E
NO ATT Lt - off
Wait 20 sec

V37E XXE

V42 GYRO TORQUING
          CMC MODE - FREE

V42E

	F 21 93	LOAD DELTA GYRO ANGLES (XYZ)	(.001°)
		(In flight - 90° max)	
	42	NO ATT Lt - off	
		Monitor Gyro Torquing on FDAI	

V48 - DAP ACTIVATION
CMC MODE - FREE

1

F 04 46

V48E
R1 ABCDE
R2 ABCDE
INSURE Left Digit of R1 is:
  0-NO DAP
  1-CSM
  2-CSM/LM
  3-SATURN DAP
  6-CSM/LM ASC
PRO
PRO
PRO To Prog in progress
V46E

V48 - DAP DATA LOAD PROCEDURE

1

F 04 46

V48E
R1 ABCDE
R2 ABCDE

	Vehicle Config	Quad A/C for $\ddot{u}$	Quad B/D for $\ddot{u}$	Err Deadband	Rate Select
R1	0 = No Dap 1 = CSM 2 = CSM & LM 3 = CSM & SIVB 6 = CSM & LM (Ascent Stg only)	0 = Fail A/C 1 = Use A/C	0 = Fail B/D 1 = Use B/D	0 = ± 05° 1 = ± 50°	0 = 005°/sec 1 = 02°/sec 2 = 05°/sec 3 = 40°/sec

	Roll Quad Select	Quad A	Quad B	Quad C	Quad D
R2	0 = Use B/D 1 = Use A/C	0 = Fail 1 = Use	0 = Fail 1 = Use	0 = Fail 1 = Use	0 = Fail 1 = Use

PRO

2

F 06 47

CSM WT, LM WT   (lbs,lbs)
Load correct values
PRO

3

F 06 48

TRIM ENGINE GMBL   (.01°)
Load correct values
PRO

V49 CREW DEFINED MANEUVER
CMC - on
ISS - on
SCS - operating

1

V37E 00E
V62E

2

V49E
OPR ERR Lt - on
RSET

F 06 22

NEW ICDU ANGLES RPY   (.01°)
Load desired angles
PRO

3

F 50 18

REQ MNVR TO FDAI RPY ANGLES   (.01°)
(AUTO)   BMAG MODE (3) - RATE 2
         SC CONT - CMC
         CMC MODE - AUTO
PRO
(MAN)   MNVR - To 5

4

06 18

AUTO MNVR TO FDAI RPY ANGLES   (.01°)

5

F 50 18

REQ TRIM MNVR TO FDAI RPY ANGLES
(TRIM)   PRO To 4
(BYPASS)   ENTR

V55 - CMC TIME UPDATE

1

F 21 24

V55E
LOAD Δ CMC TIME   (hrs,min,.01sec)

V64 START S-BAND ANTENNA

1   V37E 00E

2   V64E

F 06 51 RHO, GAMMA   (.01°,.01°)

    S-BAND ANT - S

      TRACK - MAN

        Check P&Y Angle Ind

      TRACK - AUTO

    PRO

V67 - W-MATRIX ERROR DISPLAY

1   V67E

F 06 99 POS ERR, VEL ERR, OPT CODE (.01nm,.1fps)

                R3 00001=Rend

                    00002=Orbital

                    00003=Cislunar

    Load desired data

      To reinitialize Cislunar W-matrix,

      Load: R1 +00094

             R2 +00057

             R3 +00003

    PRO

V74 CMC DOWNLINK

1   (If needed) V21 N01E 333E

F 21 01 R3 333

    R1 20000E for 4 Dumps

    or 10000E for 2 Dumps

    or 04000E for 1 Dump

2   V74E (Places erasable memory on downlink)

Nov. 6, 1968 — Basic Date
Dec. 13, 1968 — Changed

Nov. 6, 1968 — Basic Date
Dec. 13, 1968 — Changed

CSM 103

V79 LUNAR LANDMARK

1   V37E 00E, V96E when COMP ACTY-out

2   V79E

F 06 34 LAT - LONG TIME   (hrs,min,.01sec)

    Load desired time

    PRO

3 F 06 31 LDG SITE TIME   (hrs,min,.01sec)

    PRO

4 F 05 70 LMK CODE: R2=000DE

    (RECYCLE) V32E To 4

    PRO

5 F 06 34 LMK TIME   (hrs,min,.01sec)

    PRO To 4 Until 5 LMK Are Cycled Then Exit

V82 ORBIT PARAMETER DISPLAY

Note: If high CMC activity (e.g.P4Xw.Lambert)
       POSS PROG ALARM and restart (no light)
       - code 1201 or 1202 stored.

1   V82E (If AVE G On Go To 2)

F 04 06 R1 00002 Specify Vehicle

    R2 00001 CSM

       00002 LM

    PRO

2 F 16 44 HA, HP, TFF   (.1nm,.1nm,min-sec)

    (RECYCLE) V32E To 2 (Not Nec If AVE G On)

    (ΔR-miss dist DISP-P11 only) N50E To 3

    (TF PER) N32E To 4

    (EXIT)   PRO

3 F 16 50 ΔR (miss dist) HP,TFF (.1nm,.1nm,min-sec)

    KEY RLSE To 2

4 F 16 32 TIME FROM PER (Useful only if TFF=-59B59)

                       (hrs,min,.01sec)

    KEY RLSE To 2

V83 RNDZ PARAMETER DISPLAY #1

Note: If high CMC activity (e.g.P3X or P7X w
P20), POSS PROG ALARM and restart (no
light) - code 1201 or 1202 stored
If alt above earth or moon >432 nm:
P23 running - do not key V83 (or 85)
P23 not running:
Wait for no integration (COMP ACTY
not on continuously)
V96E (selects P00)
V83E (or 85E) - perform routine
V37E 00E

1   V83E
F 16 54   RANGE, RANGE RATE, THETA (.01nm,.1fps,.01°)
      PRO

V85 - RNDZ PARAMETER DISPLAY #2
Note: See V83 restrictions

1   V85E
F 16 53   RANGE, RANGE RATE, PHI (.01nm,.1fps,.01°)
      PRO

V89 - RENDEZVOUS FINAL ATTITUDE
Note: This routine will change N17 cells
      CMC - on
      ISS - on
      SCS - operating

1   V37E 00E
      V62E

2   V89E
F 04 06   R1 00003 SPECIFY TRACKING ATTITUDE
      R2 00001 (PREF)
         00002 (+X AXIS)
      PRO

Basic Date Nov. 6, 1968 Changed Dec. 13, 1968   CSM 103

3   F 06 18   FINAL FDAI RPY ANGLES   (.01°)
     (MNVR) PRO
     (UPDATE DISPLAY) V32E

4   F 50 18   REQ MNVR TO FDAI RPY ANGLES   (.01°)
     (AUTO)   BMAG MODE (3) - RATE 2
           SC CONT - CMC
           CMC MODE - AUTO
        PRO
     (MAN)   MNVR To 6

5   06 18   AUTO MNVR TO FDAI RPY ANGLES   (.01°)

6   F 50 18   REQ MNVR TO FDAI RPY ANGLES   (.01°)
     (TRIM)   ALIGN SC In ROLL
        PRO To 5
     (BYPASS)   ENTR

V90 - OUT-OF-PLANE DISPLAY

1   V90E
F 06 16   GET EVENT   (hrs,min,.01sec)
      Load desired time
      PRO

2   F 06 90   Y,YDOT,PSI   (.01nm,.1fps,.01°)
     (RECYCLE) V32E To 1
     (EXIT)   PRO

V91 - COMPUTE BANKSUM
      CMC - on (req)
      V37E 00E

1   V91E
F 05 01   R1 - Sum of all cells in bank
      R2 - Bank number
      R3 - Bugger word
      Verify R1=R2 or R1+R2=77777
        If not, rcd R2
     (NEXT BANK) PRO
     (TERM) V34E

Basic Date Nov. 6, 1968 Changed Dec. 13, 1968   CSM 103

CMC SELF CHECK

1
F 21 01
V25 N01E, 1365E
E,E,E

2
F 15 01
V15 N01E, 1365E
R1 NUMBER OF ERRORS
R2 NUMBER OF TESTS STARTED
R3 NUMBER OF TESTS SUCCESSFUL

3
V21 N27E 10E SELF TEST, FIXED & ERASABLE
(4E SELF CHECKS ERASABLE
 5E SELF CHECKS FIXED)

4
F 15 01
KEY REL
TEST SUCCESSFUL WHEN R2≥3 (78 sec)
```
      * IF PROG Lt - On         *
      * V05 N09E  01102 SELF    *
      *            TEST ERROR   *
```
(TERM) V21N27E 0E

MEASUREMENT & LOADING OF PIPA BIAS

1
DET - RESET
S/C RATES <0.1°/sec

2
V25N 21E, E,E,E/Start Event Timer

3
16 21
V16 N21E
XYZ PIPA COUNTS

4
At T + 4:16 - VERB
T4:16
(X) R1 _____ (Y) R2 _____ (Z) R3 _____(XXXAB)

5
F 21 01
V21N 01E
LOAD 1452 E (CALCULATED X BIAS)E,E,(+ABXXX)
     1454 E (CALCULATED Y BIAS)E,E
     1456 E (CALCULATED Z BIAS)E

FLAG WORD SET/RESET

1
F 21 07
V25N 07E
(LOAD FLAG WORD ADDRESS) E

2
F 22 07
(LOAD CODE FOR BIT TO BE CHANGED)ABCDE ENTR

	A			B			C			D			E	
BIT	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
CODE	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1

3
F 23 07
(SET BIT) Key 1E
(RESET BIT) Key 0E

4
(To Verify) V01 N01E (FLAG Word ADD) ENTR

5
F 01 01
R1 FLAG WORD (ABCDE)
R3 FLAG WORD ADDRESS

EXAMPLE: To cause reinitialization of W-matrix for mid-course (P23) or landmark (P22) navigation

Key:

V25N 07E	This resets bit 6 of
77E	flagword 3.
40E	Verification should
	show D<4
0E	

EXAMPLE: To set REFSMMAT flag:

Key:

V25N 07E	This sets bit 13 of
77E	flagword 3
10000E	Verification should show
	A odd
1E	

BINARY-TO-OCTAL CONVERSION

000-0	100-4
001-1	101-5
010-2	110-6
011-3	111-7

OCTAL-TO-DECIMAL CONVERSION

1-1	11-9	21-17	31-25	41-33
2-2	12-10	22-18	32-26	42-34
3-3	13-11	23-19	33-27	43-35
4-4	14-12	24-20	34-28	44-36
5-5	15-13	25-21	35-29	45-37
6-6	16-14	26-22	36-30	46-38
7-7	17-15	27-23	37-31	47-39
10-8	20-16	30-24	40-32	50-40

REVIEW DATA IN ERASABLE MEMORY

1 Perform During Any Flashing Display

2 V01 N01E (OCTAL ADD) E

3 01 01 R1 DATA R3 OCTAL ADD

4 N15E (For next succeeding word)

5 ENTR (For each succeeding word)

TO CHANGE DATA IN ERASABLE MEMORY

1
F 21 01
V21 N01E (ADDRESS) E
R3 ADDRESS
Load New Data in R1 E
N15E (For next succeeding word)
ENTR (For each succeeding word)

Basic Date Nov. 6, 1968 Changed

Basic Date Nov. 6, 1968 Changed

CSM 13

COAS LOS DETERMINATION
        CMC - on
        ISS - on
        SCS - operating
        SC CONT - SCS
        MAN ATT (3) - MIN IMP
        G/N PWR OPTICS - on
        OPT MODE - CMC
        OPT ZERO - ZERO (verify)

1   V37E 52E

2   F 04 06   00001
                V22E 3E
                PRO

3   F 50 25   00015
                ENTR

4   F 01 70   000DE STAR CODE
                LOAD BORESIGHT STAR CODE
                    OPT ZERO - OFF
                PRO (Ignore PROG ALARM)

5   06 92   SHAFT, TRUN   (.01°,.001°)
               Center target
               MARK with VERB key
               Record SHAFT, TRUN ____, ____
        (REPEAT) KEY RLSE
        (EXIT)   V37E XXE
                  OPT ZERO -ZERO

P22 RAW DATA READOUT
        CMC - on, HOLDING AT 06 49 FLASH
                IN P22

1   F 06 49   V1N1E

2   F 01 01   3537E
                Rcrd R1
                N15E
                Rcrd R1

3   01 15   ENTR
               Rcrd R1

4   Repeat 3 till 7 pieces of data recorded
                    for each mark

5   KEY RLSE

6   F 06 49   Continue P22

DSKY CONDITION LIGHT TEST
CMC - on

1 Key V37E 00E (desired)
   DSKY - P00

2 Key V35E

3 Monitor the following events
   a. All DSKY condition lts - on

   b. ISS warning lt - on
       CMC warning lt - on

   c. All DSKY numerical windows display 8
           Sign positions in R1, R2, R3 show +
           V, N windows flash

   Wait 5 sec

   d. All DSKY warning lts - off

   e. ISS lt - off
       CMC lt - off

   f. Old PROG number will be displayed
           Interrupted display (if any) will be
           restarted

MONITOR OF INPUT/OUTPUT CHANNELS

1   V11 N10E
F 11 10 (LOAD CHANNEL ADDRESS) E
         R1 Octal Contents of Specified
           Channel

LOAD OUTPUT CHANNELS

1   V21 N10E
F 21 10 (LOAD CHANNEL ADDRESS) E
         R1 (Load Octal Data) E

FLAG WORD LISTING

TITLE	ADDRESS	BIT	WHEN SET	WHEN RESET
RNDZ	00074	7	P20 initiated	P20 terminated
UPDATE	00075	7	State vector update by marks allowed	State vector updating by marks not allowed
Track	00075	5	RNDZ Tracking allowed	Rendezvous tracking not allowed
Pref Att	00076	4	Pref Att computed	Preferred S/C attitude not computed
Steer	00076	11	Steering to be done	Steering omitted
REFSMAT	00077	13	REFSMAT good	REFSMAT not good
IMU	00074	8	IMU in use	IMU not in use
State Vector	00075	8	CSM State vector updated	LM state vector updated

CSM 103

LOI MODE I ABORT

CSM 103

Basic Date Nov. 6, 1968
Changed 12/13/68

Flag	Address	Bit	Set	Reset
Terminate	00103	15	Terminate R52,R53	Do not terminate
Trunnion drive	00074	4	Enables CMC contr of trunnion	CMC control of optics trunnion not enabled
Target 1	00075	10	LM sighting	Not sighting LM
Target 2	00075	9	LMK Sighting	Sighting star
W-matrix (ORBWFLAG)	00077	6	P22, P23 W-matrix valid	P22, P23 W-matrix invalid
3 axis	00101	6	MNVR Specified by 3 axis	Maneuver specified by 1 axis
External ΔV	00076	8	Ext ΔV VG comp	Lambert VG computations
Active vehicle	00076	5	LM active	CSM active
Final comp.	00076	6	Final RNDZ comp	Interim pass through rendezvous program computations

CSM 103

Basic Date Nov. 6, 1968
Changed

Flag	Address	Bit	Set	Reset
Sighting mark	00074	6	V51 initiated	V51 not initiated
Stick flag	00075	14	RHC out of detent	RHC in detent (auto maneuver enabled)
CMOON flag	00104	12	Permanent CSM SV in Lunar Sphere of Influence	Permanent CSM SV in Earth Sphere of Influence

NON-FLAGS

	Address	Bit	1 Set	0 Reset
MARKSTAT	1330	10	After mark	After mark reject
IMODES 30	1320	9	IMU not operating	IMU operating

A	B	C	D	E
15,14,13	12,11,10	9,8,7	6,5,4	3,2,1

BINARY	-	OCTAL
000	-	0
001	-	1
010	-	2
011	-	3
100	-	4
101	-	5
110	-	6
111	-	7

SCS

No Comm

V60-63 DESCRIPTION

Before any of the following verbs will be effective, the RCS DAP must be activated.

V60 - Keying V60E will load present gimbal angles (N20) into N17 cells.

V61 - Keying V61E will display DAP phase plane errors on error needles provided the CMC has access to one of the FDAI displays.

V62 - Keying V62E will display the difference between present gimbal angles (N20) and N22 desired gimbal angles provided the CMC has access to one of the FDAI displays. The difference is resolved into CSM control axes before being displayed.

V63 - Keying V63E will display the difference between present gimbal angles (N20) and N17 (astronaut) desired gimbal angles provided the CMC has access to one of the FDAI displays. If V60E is keyed while V63 needles are active, the needles will be zeroed.

SCS POWER UP

```
AUTO RCS SELECT (16) - OFF
BMAG MODE (3) - RATE 2
CMC MODE - FREE
SC CONT - CMC
CB SCS LOGIC PWR (4) - CLOSE
ΔV CG - as required
LOGIC PWR 2/3 - on (up)
SIG COND/DRIVER BIAS PWR (both) - AC1
SCS ELEC PWR - GDC/ECA (170 watts)
FDAI PWR - OFF (verify)
BMAG PWR (both) - ON (110 watts)
FDAI PWR - BOTH (104 watts)
AUTO RCS SELECT (16) - enable
```

SCS POWER DOWN

```
EMS FUNCTION - OFF
EMS MODE - STBY
FDAI SCALE - 5/1
FDAI SELECT 1/2
FDAI SOURCE - ATT SET
ATT SET - IMU
MAN ATT (3) - MIN IMP
ATT DEADBAND - MAX
RATE - LOW
TRANS CONTR PWR - OFF
ROT CONTR PWR NORMAL (both) - OFF
              DIRECT (both) - OFF
AUTO RCS SELECT (16) - OFF
CMC MODE - FREE
BMAG MODE (3) - RATE 2
SCS TVC (both) - RATE CMD
.05G sw - OFF
α/Pc sw - Pc
TVC GMBL DRIVES PITCH & YAW - AUTO
BMAG PWR (both) - WARMUP (38 watts)
TVC SERVO PWR (both) - OFF
FDAI PWR - OFF
LOGIC PWR 2/3 - OFF
SCS ELEC PWR - OFF
SIG COND/DRIVER BIAS PWR (both) - OFF
```

GDC ALIGNMENT TO IMU GIMBAL ANGLES

IMU - on
SCS - operating

SCS 1

Damp vehicle rates

2

ATT SET dials - set to IMU angles on
        FDAI 1
FDAI SELECT - 1
FDAI SOURCE - ATT SET
ATT SET - IMU
ATT SET dials - null FDAI 1 err
        needles
ATT SET - GDC
GDC ALIGN PB - push until needles
        nulled

SCS ATTITUDE REFERENCE COMPARISON

CMC - on
IMU - on
SCS - operating
If SIVB SEPARATED: Damp vehicle rates

1

Key V16 N20E (press IMU angs)

2

FDAI SELECT - 1
FDAI SOURCE - ATT SET
ATT SET - GDC
ATT SET dials - null FDAI 1 error
        needles
Key VERB when nulled (freeze display)
Record from DSKY:
  R____°, P____°, Y____°
Record ATT SET dials:
  R____°, P____°, Y____°

NORTHERN	SOUTHERN

0° — POLARIS (#5) ... 50° — NAVI (#3)

0° — ATRIA (#34) ... 50° — ACRUX (#25)

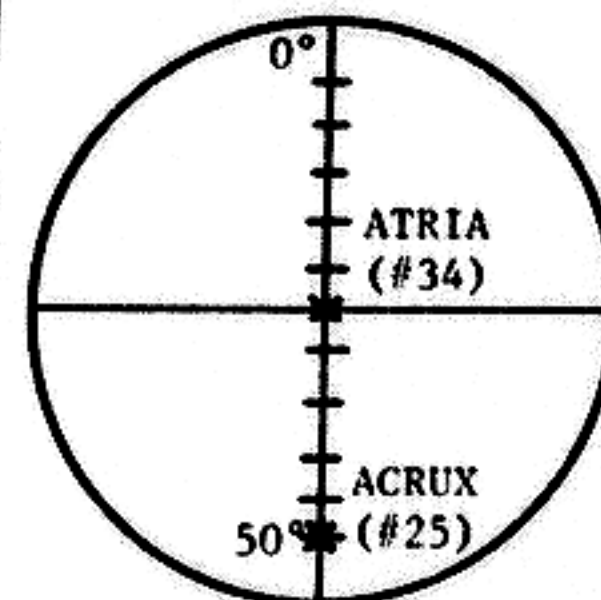SHFT 180°   TRUN 7.5°   SHFT 180°   TRUN 7.5°

REFS ____ ____ ____
R ____ ____ ____
P ____ ____ ____
Y ____ ____ ____

REFS ____ ____ ____
R ____ ____ ____
P ____ ____ ____
Y ____ ____ ____

REFS ____ ____ ____
R ____ ____ ____
P ____ ____ ____
Y ____ ____ ____

REFS ____ ____ ____
R ____ ____ ____
P ____ ____ ____
Y ____ ____ ____

BACKUP GDC ALIGNMENT (IMU FAILED)

SCS - operating
RECORD: R,P,Y ALIGN from MSFN

1   Set SCT to 180° SHFT, 7.5° TRUN

2   ATT SET dials - R,P,Y ALIGN

3   MNVR to STARS:

	North	South
R line -	Polaris (5)	Atria (34)
50° Mark -	Navi (3)	Acrux (25)

4   FDAI SELECT - 1
     ATT SET - GDC
     GDC ALIGN - push

BACKUP GDC & IMU ALIGNMENT (CMC FAILED)

ISS - on
SCS - operating
RECORD: R,P,Y ALIGN from MSFN

1   Set SCT to 180° SHFT, 7.5° TRUN

2   ATT SET dials - R,P,Y ALIGN
     FDAI SELECT - 1/2

3   CAGE IMU and hold

4   MNVR to STARS:

	North	South
R line -	Polaris (5)	Atria (34)
50° Mark -	Navi (3)	Acrux (25)

5   FDAI SELECT - 1
     ATT SET - GDC
     GDC ALIGN - push

6   ATT SET dials - 0,0,0

7   MNVR to 0,0,0 and null error needles

8   UNCAGE IMU
     FDAI SELECT - 1/2

Basic Date Nov. 6, 1968
Changed Dec. 13, 1968

CSM

LOI MODE I ABORT

No Comm

IN-PLANE GDC ALIGNMENT

CMC - on
ISS - on
SCS - operating

1   V37E 52E
   F 04 06   00001
            Load R2=00002
            PRO

2   F 06 34   GET ALIGN 0,0,0
            PRO

3   F 06 22   R,P,Y

4   Set ATT SET dials to R,P,Y on DSKY

5   FDAI SELECT - 1
            ATT SET - GDC
            GDC ALIGN - push

6   V37E XXE

PGNS ORDEAL INITIALIZATION
(IN-PLANE ALIGNMENT REQ'D)

1   FDAI 1 or 2 - ORB RATE
            EARTH/LUNAR - as req'd

2   V82E
   F 04 06   00002 SPECIFY VEHICLE
            00001
            PRO

3   F 16 44   HA, HP   (.1nm,.1nm)
            Calculate Average
                ALT SET - Set Average
            PRO

4   V83E
   F 16 54   R,RDOT,THETA   (.01nm,.1fps,.01°)
                MODE - HOLD/FAST
                SLEW - To THETA
                MODE - OPR/SLOW
            PRO

SCS ORDEAL INITIALIZATION
(IN-PLANE GDC ALIGNMENT REQ'D)

1   FDAI 1 or 2 - ORB RATE
            EARTH/LUNAR - as req'd

2   MSFN Supply Altitude
                ALT SET - Set

3   SC +X at the horizon

4   MODE - HOLD/FAST
                SLEW FDAI
                MODE - OPR/SLOW

Basic Date Nov. 6, 1968
Changed

Basic Date Nov. 6, 1968
Changed

No Comm

PASSIVE THERMAL CONTROL
(X axis Roll, Pitch & Yaw Hold)
    CMC - on (for CMC MNVR)
    ISS - on (for CMC MNVR)
    SCS - operating
    CMC MODE - FREE
    BMAG MODE (3) - RATE 2
    AUTO RCS SEL (12) - MNA/B
    LOAD DAP
    ROT CONTR PWR NORMAL 2 - AC/DC
V37E 00E
    RECORD: R,P,Y PTC from MSFN

1   MNVR TO PTC ATT
     V62E

2   V49E

3   F 06 22   DESIRED FINAL GMBL ANGLES   (.01°)
       LOAD R,P,Y PTC
       PRO

4   F 50 18   REQ MNVR TO FDAI R,P,Y ANGLES   (.01°)
     (AUTO)   SC CONT - CMC
            CMC MODE - AUTO
       PRO
     (MAN)   SC CONT - SCS
            MNVR to 6

5   06 18   AUTO MNVR TO FDAI R,P,Y ANGLES   (.01°)

Basic Date Nov. 6, 1968
Changed 11/22/68
103

Basic Date Nov. 6, 1968
Changed Dec. 13, 1968
CSM 103

---

6   F 50 18   REQ TRIM TO FDAI R,P,Y ANGLES   (.01°)
     (AUTO TRIM)
           SC CONT - CMC
           CMC MODE - AUTO
       PRO to 5
     (BYPASS)   DEADBAND - MAX
           RATE - HIGH
           LIMIT CYCLE - on (up)
           AUTO RCS SEL PITCH & YAW -
            Set for single jet operation
           MAN ATT (PITCH, YAW) - RATE CMD
           MAN ATT (ROLL) - ACCEL CMD
           SC CONT - SCS
           BMAG MODE (3) - ATT1/RATE 2
     ENTR

7   Initiate .1°/sec roll rate

8   Terminate PTC
           MAN ATT (ROLL) - RATE CMD
           BMAG MODE(3) - RATE 2
           LIMIT CYCLE - OFF

P37 RETURN TO EARTH PROGRAM
(with -MA)

Nominal TEI - completed

1
   F 04 06

V37E 21E
R1 00002
R2 00001
PRO

2 F 06 34

GET LAT, LONG   (hrs,min,.01sec)
Load TEI TIG + 24 hrs.
PRO

3 F 06 43

LAT, LONG, ALT
V6N2E, 1107E

4 F 06 02

GERU
If GERU>07990
  V32E to 2 and increment time by
  1 hr.
IF GERU<07990
  Rcrd GERU _____
  Rcrd GET LAT, LONG _____ hrs
                     _____ min
                     _____ sec

PRO

5 F 37
   F 06 33

37E
TIG   (hrs,min,.01sec)
Load TIG
P RO

6 F 06 60

BLANK, V PRED, GAMMA EI   (fps,.01 9)
Load R2 and R3 = +00000
PRO
V24 N1E
  3651E
70000E,E (-MA)
KEY RLSE

7　F 06 61　IMPACT LAT, LONG　　　　　　　　(.01°)
　　　　　　　PRO

8　F 06 39　ΔT TRANSFER　　　　　　(hrs,min,.01sec)
　　　　　　　PRO

9　F 06 60　BLANK, V 400K, GAMMA EI　　(fps,.01°)
　　　　　　　PRO

10　F 06 81　ΔVXYZ (LV) TIG　　　　　　　　(.1fps)
　　　　　　　PRO
　　　　　　　V16 N38E

11　　16 38　S.V. TIME

```
        *N38 oscilation (EI±5hrs)    *
        * V96E                       *
        * V37E 37E to 5 and          *
        *   advance TIG by 15 min    *
        *PROG ALARM:                 *
        *   KEY RLSE-(F 05 09)       *
        * V32E to 5 and use TIG      *
        *    + 15 min                *
        *If second attempt Go to     *
        *P37 RETURN TO EARTH PROGRAM *
        *      (without -MA)         *
```
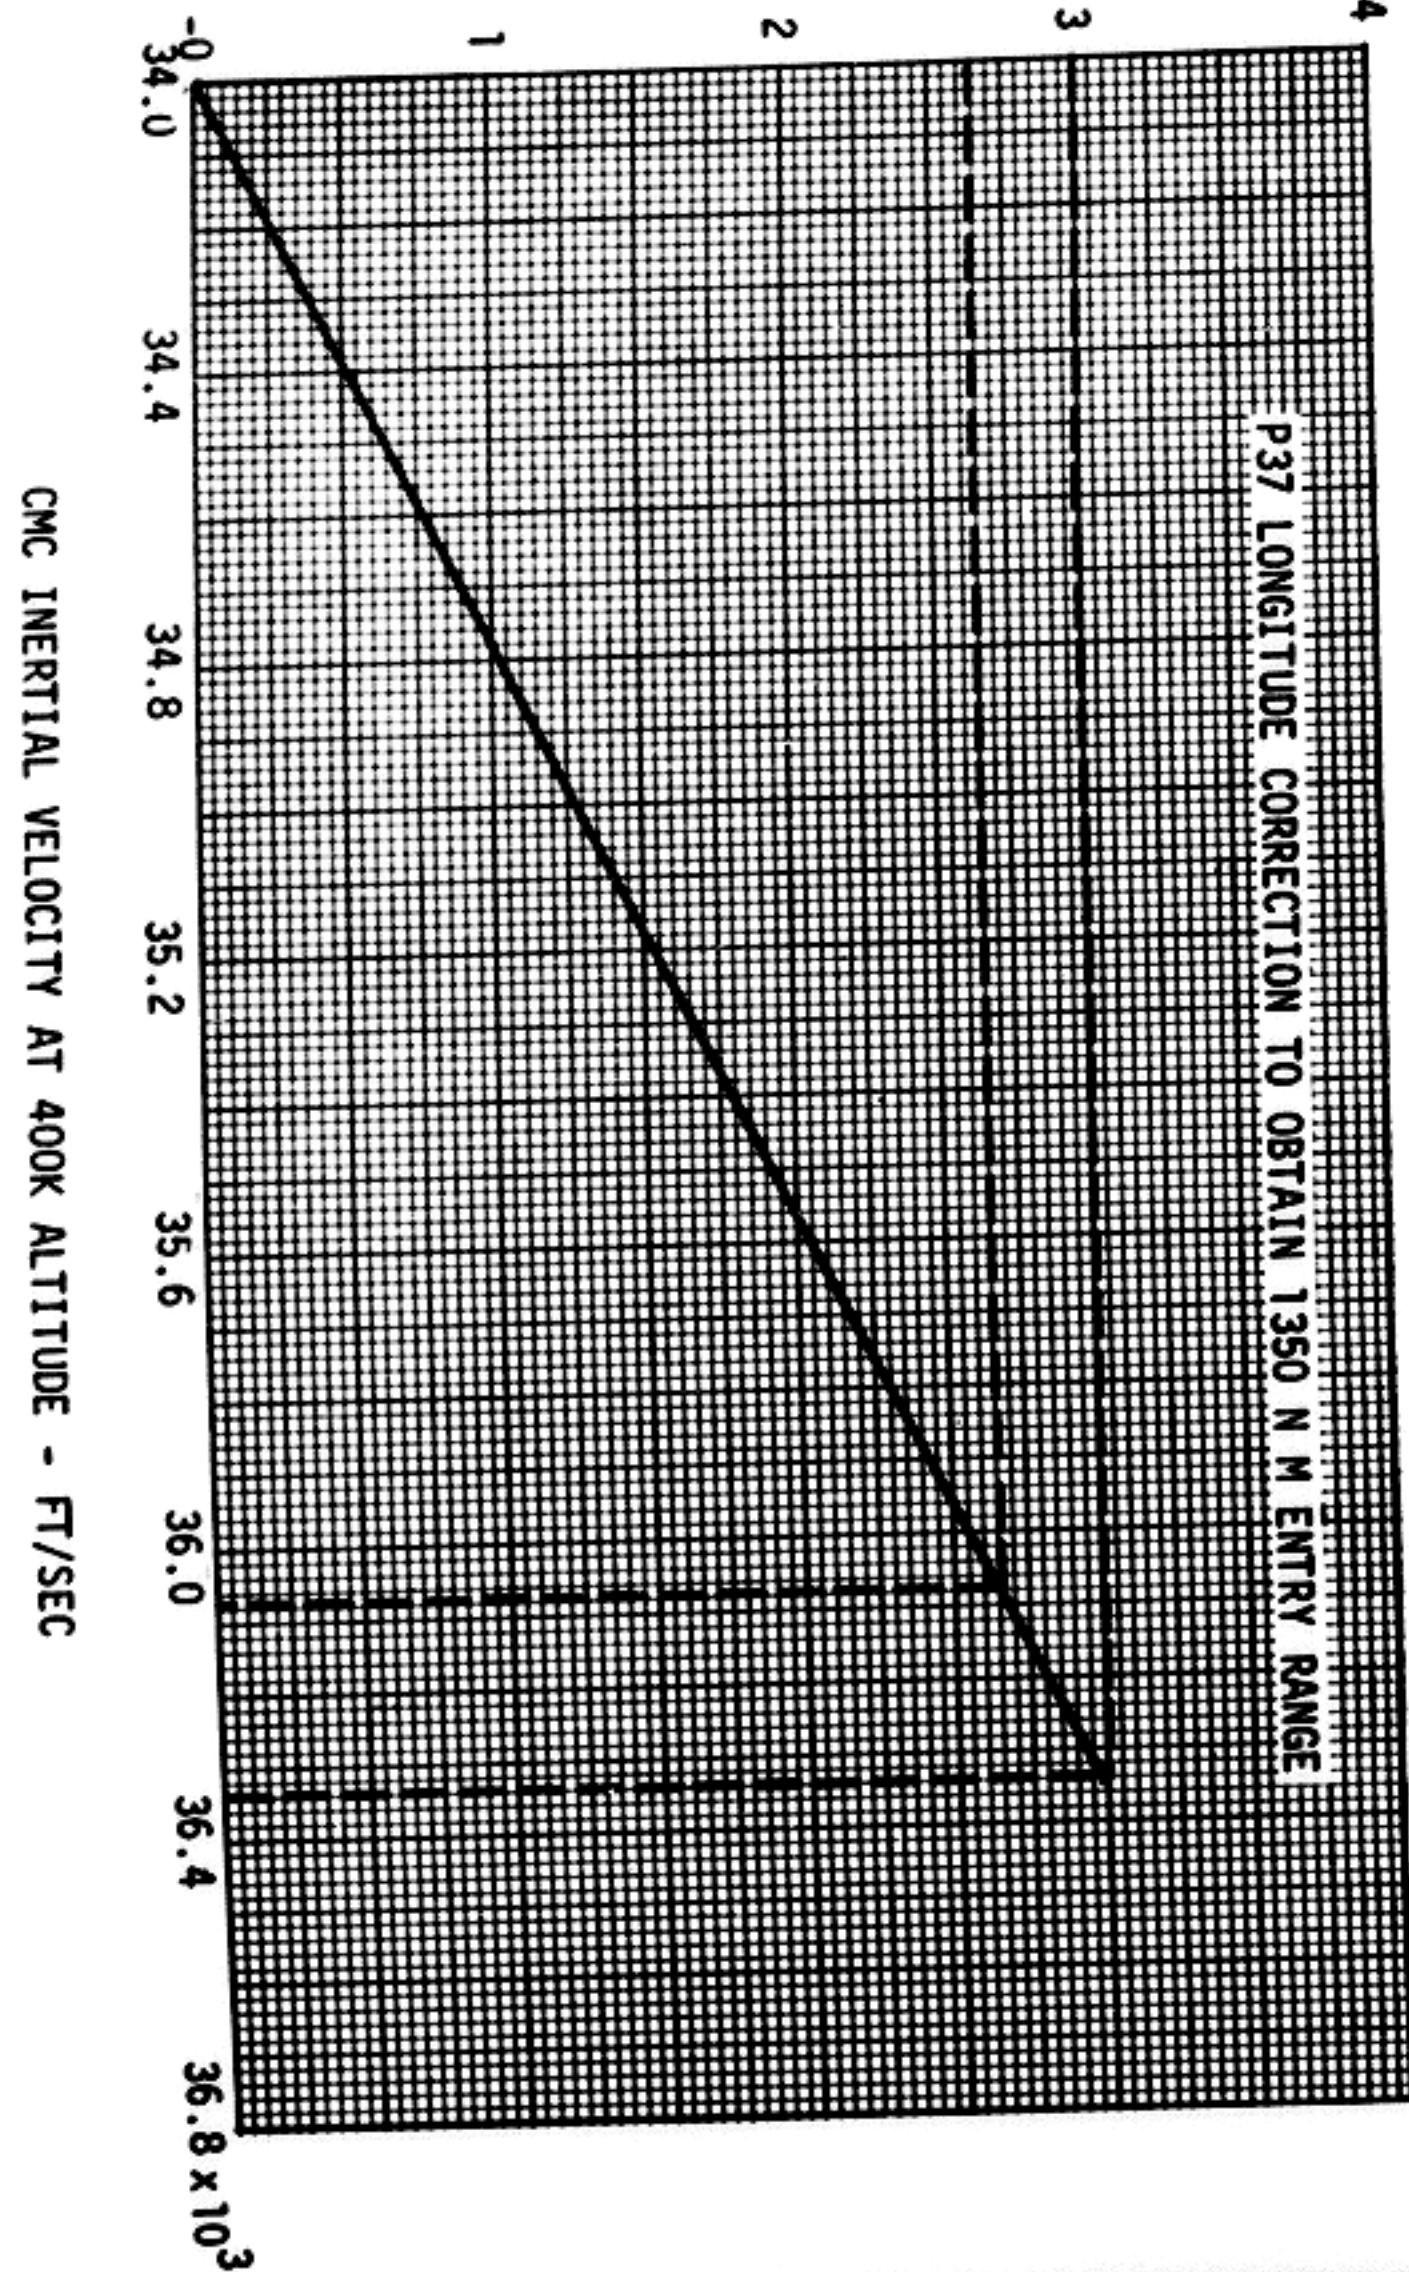
12 KEY REL Lt - on
　　　　　RCRD GET EI＿＿＿＿＿＿＿＿＿hrs
　　　　　　　　　(N38) ＿＿＿＿＿＿＿＿min
　　　　　　　　　　　　＿＿＿＿＿＿＿＿sec

　　　　　KEY RLSE

13　F 06 61　IMPACT LAT, LONG　　　　　　(.01°)
　　　　　　　LONG ＿＿＿＿＿.＿＿
　　　　　　　PRO

Basic Date　Nov. 6, 1968
Changed　　Dec. 17, 1968

Δ LONGITUDE CORRECTION - DEG

P37 LONGITUDE CORRECTION TO OBTAIN 1350 N M ENTRY RANGE

CMC INERTIAL VELOCITY AT 400K ALTITUDE - FT/SEC

Basic Date   Nov. 6, 1968
Changed   Dec. 17, 1968

14 F 06 39   ΔT TRANSFER (hrs,min,.01sec)
               Rcrd _____
               PRO

15 F 06 60   BLANK, V400K, GAMMA EI   (fps,.01°)
               V400K _____
               Determine ΔLong from V400K
                         vs Long Bias Chart
                         IMPACT LONG=LONG- ΔLONG= _____
               PRO

16 F 06 81   ΔVXYZ (LV) TIG   (.1fps)
               Rcrd
               ΔVX_____
               ΔVZ_____
               PRO

17 F 04 06   THRUST OPTION
               R1 00007
               R2 0000X
                 X=1 (SPS)
                 X=2 (RCS)
               PRO

18 F 06 33   TIG   (hrs,min,.01sec)
               PRO

19 F 16 45   MARK, TFI,MGA (mark,min-sec,.01°)
               Set DET
               PRO (MGA SET TO-00002 IF
                 REFSMMAT FLAG NOT SET)

20 F 37   If IMPACT LONG unsatis, go to N.C.-7
               If IMPACT LONG satis:
               40E or 41E

P37 RETURN TO EARTH PROGRAM
(without -MA)

Nominal TEI-completed
P37-with-MA-no solution

1. V37E 37E
   F 06 33   TIG   (hrs,min,.01sec)
   Load TIG (GET LAT, LONG from P21)
   PRO

2. F 06 60   BLANK, V PRED, GAMMA EI   (1fps,.01°)
   Load R2 and R3 = +00000
   PRO

3. F 06 61   IMPACT LAT, LONG   (.01°)
   PRO

4. F 06 39   ΔT TRANSFER   (hrs,min,.01sec)
   PRO

5. F 06 60   BLANK, V400K, GAMMA EI   (fps,.01°)
   PRO

6. F 06 81   ΔVXYZ (LV) TIG   (.1 fps)
   PRO

   V16 N38E
   When KEY REL-On, RCRD GET EI _____ hrs
                          (N38) _____ min
                                _____ . sec

   KEY RLSE

7. F 06 61   IMPACT LAT, LONG   (.01)
   LONG _____
   PRO

8. F 06 39   ΔT TRANSFER (hrs,min,.01sec)
   Rcrd _____
   PRO

9. F 06 60   BLANK, V400K, GAMMA EI   (fps,.01)
   V400K _____
   Get Δ LONG from V400K vs Long Bias Chart
   IMPACT LONG=LONG-Δ LONG=_____ .
   δ LONG=LONG(PAD)-IMPACT LONG
   PRO

Basic Date - Nov. 6, 1968
Changed - Dec. 17, 1968

N.C.-6
ENTRY ALIGNMENT (No comm)

To be performed at TEI + 1 hr
P37 targeting-complete

| 1 | | V37E 30E | |
| | F 06 33 | GETI | (hrs,min,.01sec) |

Load GET EI (N38) from P37-with -MA
   or RET .05G (PAD)
PRO

| 2 | F 06 81 | ΔVXYZ (LV) | (.1fps) |

Load ΔVX=00100
      ΔVY=ΔVZ=+00000
PRO

| 3 | F 06 42 | HA, HP, ΔV (REQ) | (.1nm,.1nm,.fps) |
| | | PRO | |

| 4 | F 16 45 | M, TFI, MGA | (0,min-sec,.01°) |
| | | PRO | |

| 5 | F 37 | 40E | |

| 6 | F 50 18 | V37E 52E | |

PERFORM P52, PREFERRED OPTION
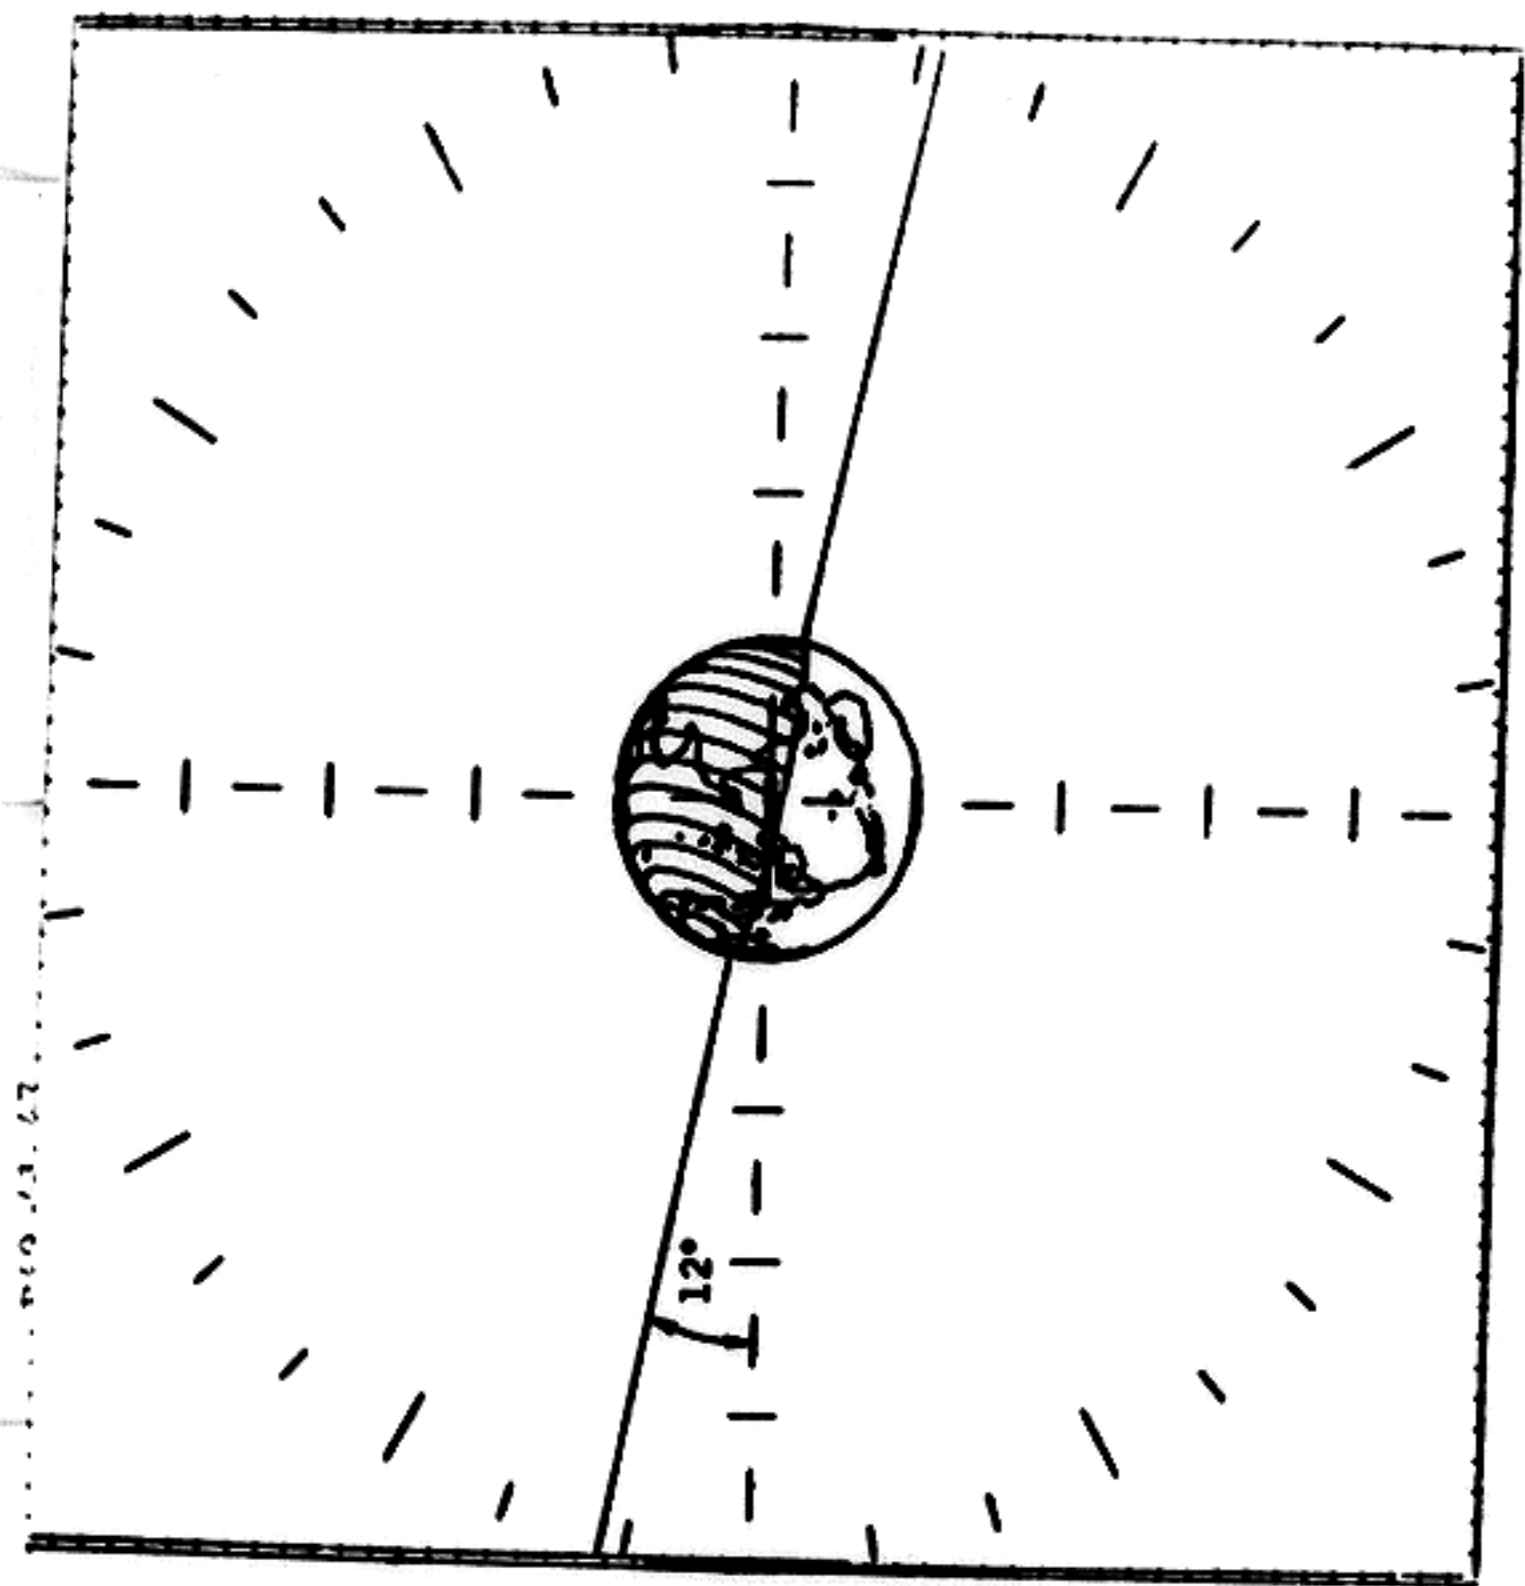(pg G-56)

SC ORIENTATION FOR NO COMM RTE MCC-NO IMU

P37 tarteting - complete

ΔV's determined: ΔVX= _____ . ___
                 ΔVY= _____ . ___
                 ΔVZ= _____ . ___

| 1 | | V 37E 30E | |
| | F 06 33 | GETI | |

Load GET of MCC
PRO

| 2 | F 06 81 | ΔVXYZ(LV) | (.1fps) |

Load ΔV's from above
PRO

| 3 | F 06 42 | HA,HP,ΔV(REQ) | |

Rcrd ΔV(REQ) _____ . ___
V37E00E
Calculate $r = \Delta VZ/\Delta V(REQ)$ _____ . ___
Calculate $\theta = \sin^{-1}(r) =$ _____ . ___

4   Center earth in COAS:
      Terminator – horizontal
      Sunlit side down (+Z SC)

5   Roll left   6° – slow return
              12° – fast return

6   FDAI SELECT – 1
      FDAI SOURCE – ATT SET
      ATT SET – GDC
      ATT SET dials – 0°, 0°, 0°
      GDC ALIGN PB – push

7   If ΔVX positive: pitch up 90°-θ°
      If ΔVX negative: pitch down 90°-θ

8   Perform burn: $\Delta V(REQ)$

LONG CONTROL FOR NO COMM

MCC 6 & subs – go to 3
ΔVX(P37) _____ . _____
ΔVZ(P37) _____ . _____

ΔT TRANSFER ____ ____ ____ (N39)
IMPACT LONG (N61) _____ . _____

1   Enter GERU vx RADIAL SPEED
      chart.
      Find REF point corresponding to GERU
         and either V400K or ΔT TRANSFER
      Move along GERU line the desired
         $\Delta LONG$ or $\Delta\Delta$ TRANSFER (Each
         $\Delta TRANS$ line=30°).
      Rcrd $\Delta RADIAL$ SPEED (i.e. distance
         between pts. in fps):
         $\Delta VZ(LONG)=\Delta VZ(DES)-\Delta VZ(REF)$
         _____ = _____ – _____
      Determine Avg. V400K between DES pt
         and REF pt.

      Enter GERU vs K chart
         Use GERU and Avg V400K to determine
      K= _____ .

· Inplane orientation of the earth's terminator for midcourse corrections during the transearth coast.

Basic Date — Nov. 6, 1968
Changed — Dec. 17, 1968

12°

N.C.-8

Calc $\Delta VX(LONG)=(K) \times \Delta VZ(LONG)$

$\underline{\qquad} . \underline{\qquad} =. \underline{\qquad} \times \underline{\qquad}$

Calc P30 ΔV's:

$\Delta VX(P30)=\Delta VX(P37)+\Delta VX(LONG)= \underline{\qquad} . \underline{\qquad}$
$\Delta VY=0 \qquad\qquad\qquad\qquad\qquad = \underline{\qquad} . \underline{\qquad}$
$\Delta VZ(P30)=\Delta VZ(P37)+\Delta VZ(LONG)= \underline{\qquad} . \underline{\qquad}$

ΔV's not acceptable or GERU vs RADIAL SPEED
   chart too small, go to 3 for corridor
   control only

2   V37E 30E To P30 pg G-35
         Use $\Delta VX(P30), \Delta VY(P30), \Delta VZ(P30)$
         Use GET LAT, LONG for GETI

3   Enter GERU vs K chart
         Use GERU and V400K to determine
         $K = . \underline{\qquad}$
     Calculate $K \times \Delta VZ(P37)= \underline{\qquad}$
     Calculate $\Delta VX(P30)=\Delta VX(P37)-K\Delta VZ(P37)$
         $\underline{\qquad} = \underline{\qquad} - \underline{\qquad}$

4   V37E30E to P30 pg G-35
         Use $\Delta VX(P30)$
            $\Delta VY(P30)= \Delta VZ(P30)=0$
         Use GET LAT, LONG for GETI

Basic Date — Nov. 6, 1968
Changed — Dec. 17, 1968

Basic Date — Nov. 6, 1968
Changed — Dec. 17, 1968

N.C.-9

DIRECT ABORT PROCEDURES

Time From	
*DAM+	P23 – 3 sets ENH Stars 22, 26, 31.
DAM + 1 hr	Determine ENTRY Alignment (N.C. –6) IMU Realign P52 Option 1-Preferred
DAM + 2.5 hrs.	P23 – 3 sets ENH Stars 22, 26, 31. 1 set LH stars 33N,40N,42F,45F -for abort after TLI+20hrs
DAM+3hrs	P37 Criteria for MCC $\Delta V > 1$ fps. IMU Realign P52 Option 2-REFSMMAT(If MGA > 45° do a preferred align specified by P40/41
DAM + 5 hrs.	MCC_1
DAM + 6 hrs.	P23 – 3 sets (22,26,31 for remainder of sighting)
DAM + 11 hrs.	P23 – 6 sets
DAM + 12 hrs.	P37
EI – 11 hrs	P23 – 6 sets
EI – 7 hrs	IMU Realign P52 Option 3 – REFSMMAT
EI – 6 hrs	P23 – 3 sets
EI – 4 hrs	P23 – 3 sets
EI – 3 hrs	P 37 Landing Site Determination for P61 (N.C
EI – 2:30 hrs	MNVR To Burn Attitude
EI – 2 hrs	MCC

EI - 1:35 hrs   IMU Realign P52   Go to E-6 (P)
                  Option 3 - REFSMMAT

*   DAM - Direct Abort Maneuver