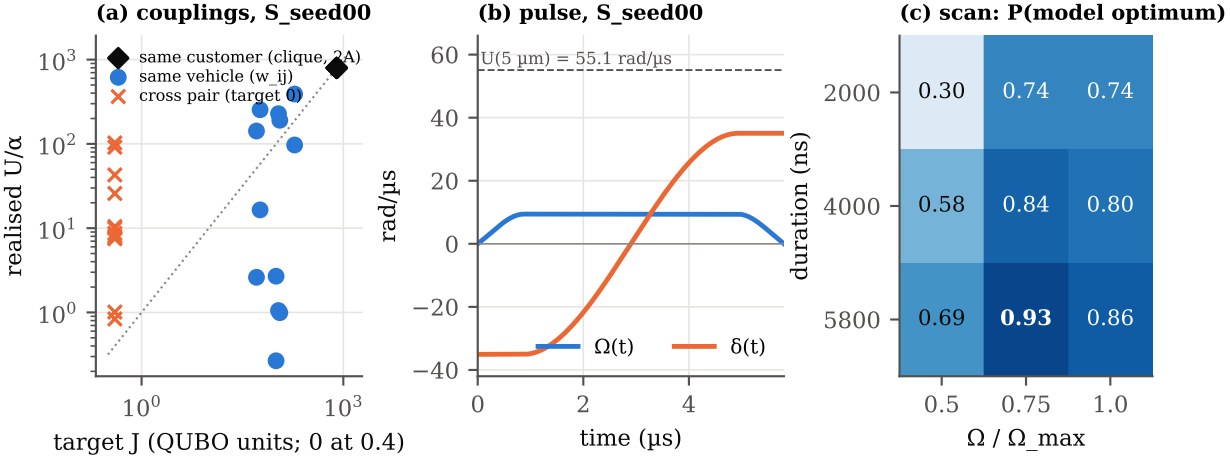
(a) couplings, S_seed00
same customer (clique, 2A)
same vehicle (w_ij)
cross pair (target 0)
realised U/α
target J (QUBO units; 0 at 0.4)
(b) pulse, S_seed00
U(5 µm) = 55.1 rad/µs
rad/µs
time (µs)
Ω(t)
δ(t)
(c) scan: P(model optimum)
duration (ns)
Ω / Ω_max
0.30
0.74
0.74
0.58
0.84
0.80
0.69
0.93
0.86