

POWER

CR2032 cell, reverse-polarity P-FET, >=100 uF bulk. No regulator: everything runs from VBAT.

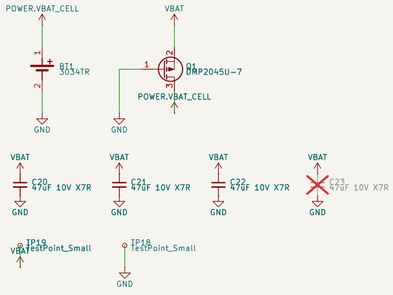


AUDIO PASSTHROUGH

Fully passive stereo path, jack to jack. Works with a dead cell or MCU in reset.

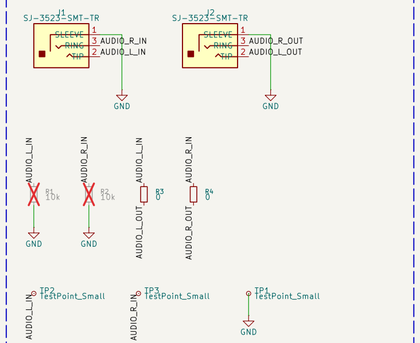


AUDIO SENSE

Non-loading 100k tap, precision half-wave envelope detector (U1A), music-present comparator (U1B). Option B direct-ADC parts are DNP.

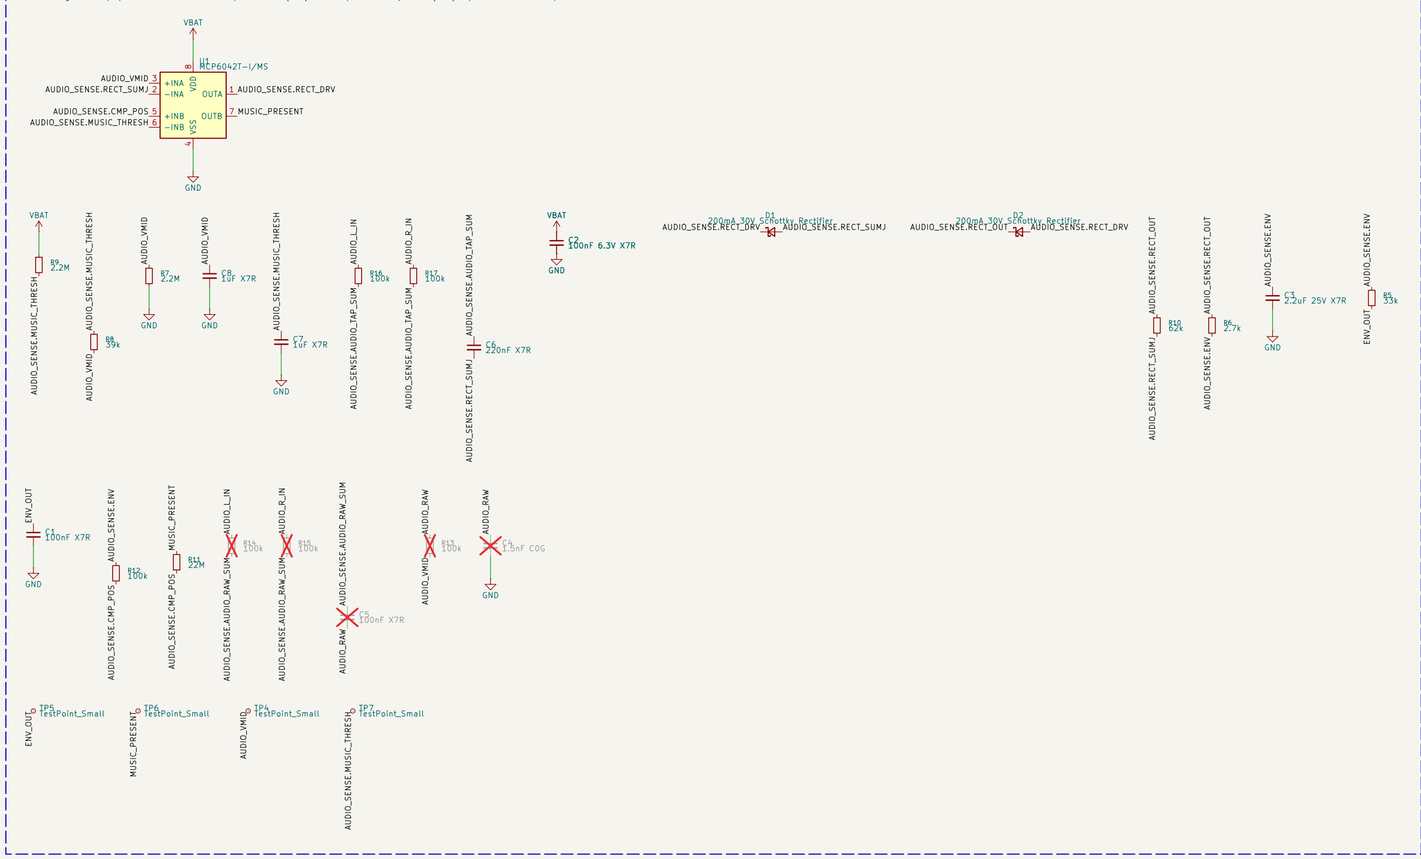


MCU

STM32U083KCU6, decoupling, 32.768 kHz LSE, BOOT0 pull-down, NRST filter.

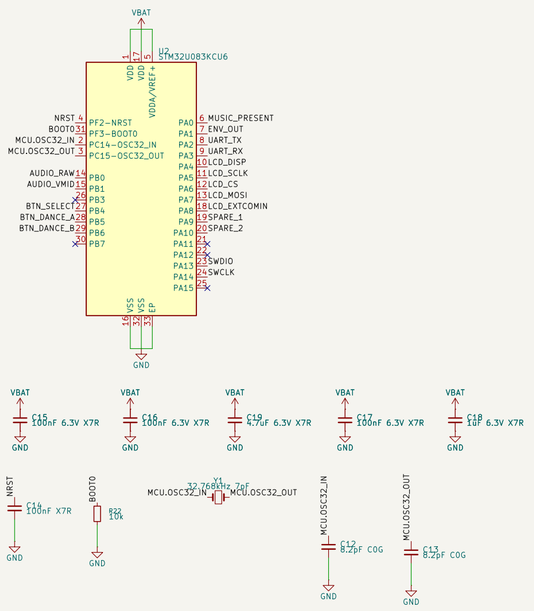


DISPLAY

Sharp LS013B7DH03 memory LCD on 10-pin 0.5 mm FPC (J4). EXTMODE strap selects EXTCOMIN mode.

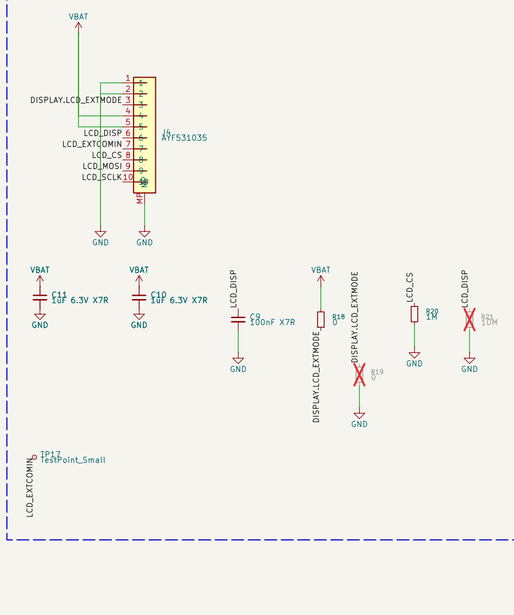


HMI

Select, Dance A, Dance B (internal pull-ups) and the pinhole reset switch.

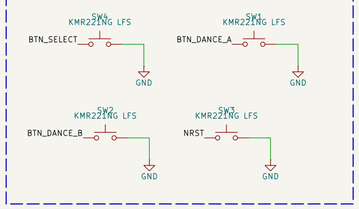


DEBUG

10-pin Cortex SWD header and probe pads. Probe VTref only senses VBAT.

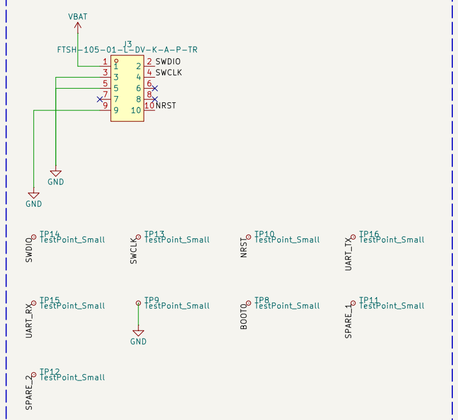

MECHANICAL

M2 mounting holes and fiducials.



Grouped by module. Nets connect by label name across blocks.
Generated by Diode pcb from funbit.zen; blocks follow modules/*.zen

Sheet: /		
File: eda.kicad_sch		
Title: funbit: Sony PET-F7 Funbbit recreation		
Size: A2	Date: 2026-10-17	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 1/1