Equal error budgets, different readout structure

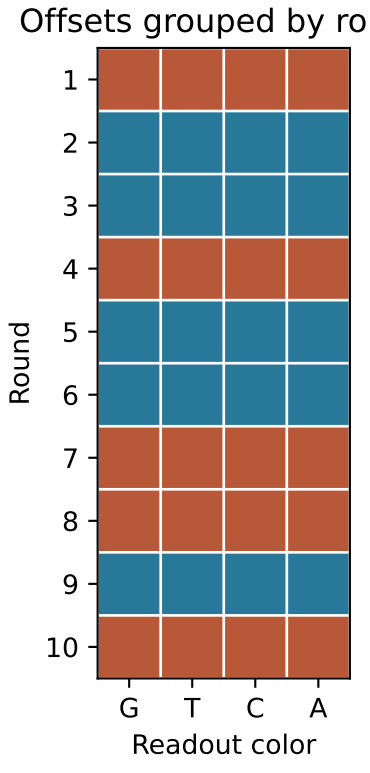

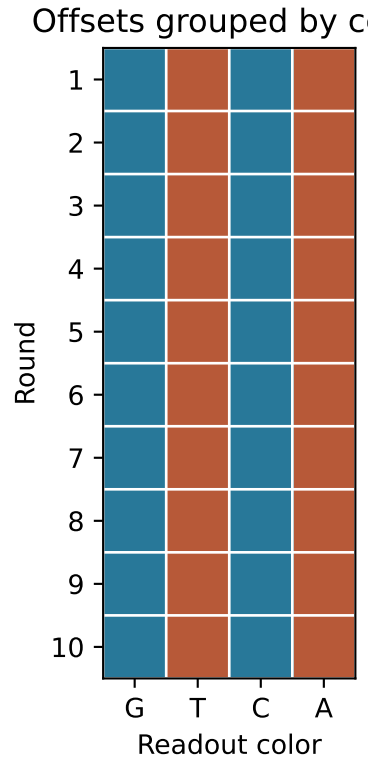

Identical full error distribution

20 frames: +(4, 2) px

20 frames: −(4, 2) px

Mean = (0, 0)

RMS = √20 = 4.47 px

Covariance = [[16, 8], [8, 4]]

Five calibration policies
Two actual decoder families
Two fixed external fields
60 planned arms

Frozen before perturbed decode outcomes · one BARseq3 preparation · controlled recovery of native outputs