

DESCRIPTION

ALZ 3710 is a small diameter submersible hydrostatic level transmitter for aggressive media. High-quality ceramic piezoresistive sensor, robust Ø21 mm PP-HT, PVC or stainless steel housing and a hydrometric cable with the ventilation tube provide high performance in a slimmer form factor for a wide variety of industrial level measurement applications.

SPECIFICATIONS

Level: - 6 mH₂O up to 200 mH₂O (stainless steel housing),
- 6 mH₂O up to 100 mH₂O (PP-HT and PVC housing)
Basic accuracy: ±0.5%
Probe: Ø21 mm, PP-HT, PVC. Optional: Ø17 mm, Stainless steel
Output: 4...20 mA
Sensor: ceramic thick film
Media temperature:
PVC: -20...+50 °C
PP-HT: -20...+80 °C
Stainless steel: -25...+80 °C

APPLICATIONS

Confined spaces level measurement
Viscous media
Aggressive media (*)
Sewage, waste water, sludge

* please consult the manufacturer for particular media compatibility

Appearance, mounting kit contents and/or specifications are subject to change without prior notice. We are constantly working on further improvement of our products.
Delivery subject to standard terms of delivery.
© 2026 Piezus

TECHNICAL SPECIFICATIONS

MEASURING RANGES

Pressure range, bar	Level, mH ₂ O	Overpressure, bar	Pressure range, bar	Level, mH ₂ O	Overpressure, bar
0...0.6	0...6	2	0...6	0...60	10
0...1	0...10	2	0...10	0...100	20
0...1.6	0...16	4	0...16	0...160	40
0...2.5	0...25	4	0...20	0...200	40
0...4	0...40	10	-	-	-

PERFORMANCE

Accuracy, % of span*	≤ ±0.5
Temperature effect (% of span / 10 °C)	≤ ±0.4
Compensated range	0...+70 °C
Power supply effect	≤ ±0.05% of span / 10 V
Load resistance effect	≤ ±0.05% of span / kOhm
Long-term stability	≤ ±0.5% of span / year
Response time (10...90%)	≤ 10 ms

* Accuracy includes non-linearity, hysteresis and non-repeatability.

OPERATING CONDITIONS

Medium temperature (depends on housing)	PP-HT:	-20...+80 °C
	PVC:	-20...+50 °C
	Stainless steel:	-25...+80 °C
Cable service temperature (static applications)	PVC:	-20...+70 °C
	PUR:	-50...+70 °C
	PP-HT:	-20...+80 °C
Storage temperature (depends on housing)	PVC:	-20...+50 °C
	Stainless steel:	-25...+80 °C
Vibration resistance		10 g RMS, 25–2000 Hz
Shock resistance		100 g / 11 ms
Service life		> 100 x 10 ⁶ cycles

MECHANICAL SPECIFICATIONS

Housing	PP-HT, PVC, Stainless steel
Seal	FKM; EPDM; NBR
Diaphragm	ceramics Al ₂ O ₃ 96 %
Cable external jacket	PVC; PUR; FEP
Ingress protection	IP69K


ELECTRICAL SPECIFICATIONS

Output signal	Power supply, U _s	Load resistance, R	Power consumption
4...20 mA / 2-wire	12...36 V	≤ [(U _s – 12 V) / 0.02 A] Ohm	< 26 mA

ELECTRICAL CONNECTIONS / PIN ASSIGNMENT

Circuits	Cable gland wires
2-wire	white (red)
power +	brown (blue)
power –	yellow-green
ground	

DIMENSIONS (mm) PLASTIC HOUSING (PVC, PP-HT)

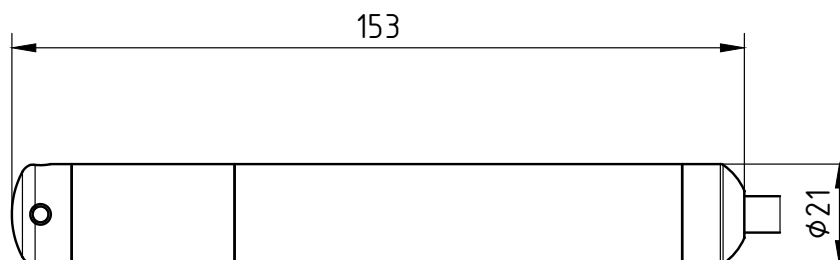

ORDERING CODE

ALZ 3710		-X	-XXXX	-X	-X	-X	-X	-XX	// X	-XXXX
UNIT OF MEASUREMENT										
	bar	B								
	kg/cm ²	S								
	mH ₂ O	W								
	kPa	K								
	Other (specify when ordering)	X								
UPPER RANGE LIMIT (URL)										
bar, kg/cm ²	mH ₂ O	kPa								
0.6	0600	6	6000	60	6001					
1	1000	10	1001	100	1002					
1.6	1600	16	1601	160	1602					
2.5	2500	25	2501	250	2502					
4	4000	40	4001	400	4002					
6	6000	60	6001	600	6002					
10	1001	100	1002	1000	1003					
16	1601	160	1602	Other	XXXX					
20	2001	200	2002							
Other	XXXX	Other	XXXX							
ACCURACY										
	0.5%	D								
	Other (specify when ordering)	X								
OUTPUT SIGNAL										
	4...20 mA / 2-wire (standard)	A								
	Other (specify when ordering)	X								
SEALS										
	FKM	F								
	NBR	N								
	EPDM	E								
	Other (specify when ordering)	X								
HOUSING MATERIAL										
	PVC	P								
	PP-HT	H								
	Stainless steel 316L	A								
VERSION										
	Compact design, Ø17 mm only with stainless steel housing	1M								
	Standard	00								
	Other (specify when ordering)	XX								
CABLE EXTERNAL JACKET										
	PVC	P								
	PUR	U								
	FEP	T								
	Other (specify when ordering)	X								
CABLE LENGTH										
	Any length in meters (e.g., 010M means 10 meters)	XXM								

Example: ALZ 3710-W-6000-D-A-F-P-00 // P-010M

ACCESSORIES

				
Anchoring clamp for submersible transmitter	PZ 1024 Power supply unit	BZ 05 / BZ 10 Dry air junction box for submersible transmitters		