



DESCRIPTION

ALZ 3925 is an ultra small diameter submersible hydrostatic level transmitter. High-quality silicon piezoresistive sensor, hydrometric cable with the ventilation tube and Ø17 mm diameter stainless steel housing are ideally suited for narrow conditions, including boreholes and piezometer wells.

SPECIFICATIONS

Level: 6 mH₂O up to 250 mH₂O
Basic accuracy: ±0.25%
Probe: Ø17 mm, AISI 316L stainless steel
Output: 4...20 mA
Sensor: silicon piezoresistive
Media temperature: -20...+70 °C

APPLICATIONS

Ground water monitoring
Boreholes, wells, piezometers
Environmental monitoring
Narrow conduits mounting

TECHNICAL SPECIFICATIONS

MEASURING RANGES

Pressure range, bar	Level, mH ₂ O	Overpressure, bar
0...0.6	0...6	3
0...1	0...10	3
0...1.6	0...16	6
0...2.5	0...25	6
0...4	0...40	15
0...6	0...60	15
0...10	0...100	30
0...16	0...160	60
0...25	0...250	60

PERFORMANCE	P > 0.4 bar	P ≤ 0.4 bar
Accuracy, % of span*	≤ ±0.25 (standard) / 0.20 (optional)	≤ ±0.5 (standard)
Temperature effect (% of span / 10 °C)	≤ ±0.1	≤ ±0.2
Compensated range	-20...+70 °C	0...+70 °C
Power supply effect	≤ ±0.05% of span / 10 V	
Load resistance effect	≤ ±0.05% of span / kOhm (transmitters with current output)	
Long-term stability	≤ ±0.1% of span / year	
Response time (10...90%)	≤ 1 ms	

* Accuracy includes non-linearity, hysteresis and non-repeatability.

OPERATING CONDITIONS

Medium temperature (depends on seal)		-20...+70 °C
Cable service temperature (static applications)	PVC:	-20...+70 °C
	PUR:	-50...+70 °C
Storage temperature		-20...+70 °C
Vibration resistance		10 g RMS, 25–2000 Hz
Shock resistance		100 g / 11 ms
Service life		> 100 x 10 ⁶ cycles

MECHANICAL SPECIFICATIONS

Housing	stainless steel 316L (1.4404)
Seal	FKM; EPDM; NBR
Diaphragm	stainless steel 316L (1.4435)
Cable external jacket	PVC, PUR, FEP
Ingress protection	IP69K


ELECTRICAL SPECIFICATIONS

Output signal	Power supply, U _s	Load resistance, R	Power consumption
4...20 mA / 2-wire	12...36 V	≤ [(U _s – 12 V) / 0.02 A] Ohm*	≤ 26 mW

ELECTRICAL CONNECTIONS / PIN ASSIGNMENT

Circuits		Cable gland wires
2-wire	power +	white (red)
	power –	brown (blue)
	ground	yellow-green
Pt100 (optional)	T+	yellow
	T–	pink (white)
	T–	gray (green)

DIMENSIONS (mm)

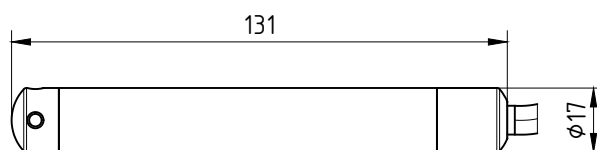

ORDERING CODE

ALZ 3925		-X	-XXXX	-X	-X	-X	-XX	// X	-XXXX
UNIT OF MEASUREMENT									
bar		B							
kg/cm ²		S							
mH ₂ O		W							
kPa		H							
Other (specify when ordering)		X							
UPPER RANGE LIMIT (URL)									
bar, kg/cm ²		mH ₂ O		kPa					
0.6	0600	6	6000	60	6001				
1	1000	10	1001	100	1002				
1.6	1600	16	1601	160	1602				
2.5	2500	25	2501	250	2502				
4	4000	40	4001	400	4002				
6	6000	60	6001	600	6002				
10	1001	100	1002	1000	1003				
16	1601	160	1602	Other	XXXX				
25	2501	250	2502						
Other	XXXX	Other	XXXX						
ACCURACY									
0.25% (standard)				C					
0.5% (standard)				D					
0.2%				B					
Other (specify when ordering)				X					
OUTPUT SIGNAL									
4...20 mA / 2-wire (standard)				A					
Other (specify when ordering)				X					
SEALS									
FKM				F					
NBR				N					
EPDM				E					
Other (specify when ordering)				X					
VERSION									
Standard				00					
Pt100 temperature sensor				0T					
Other (specify when ordering)				XX					
CABLE EXTERNAL JACKET									
PVC				P					
PUR				U					
FEP				T					
Other (specify when ordering)				X					
CABLE LENGTH									
Any length in meters (e.g., 010M means 10 meters)				XXXX					
Example: ALZ 3925-W-6000-D-A-F-00 // P-010M									

ACCESSORIES

				
Anchoring clamp for submersible transmitter	PZ 1024 Power supply unit	BZ 05 / BZ 10 Dry air junction box for submersible transmitters		