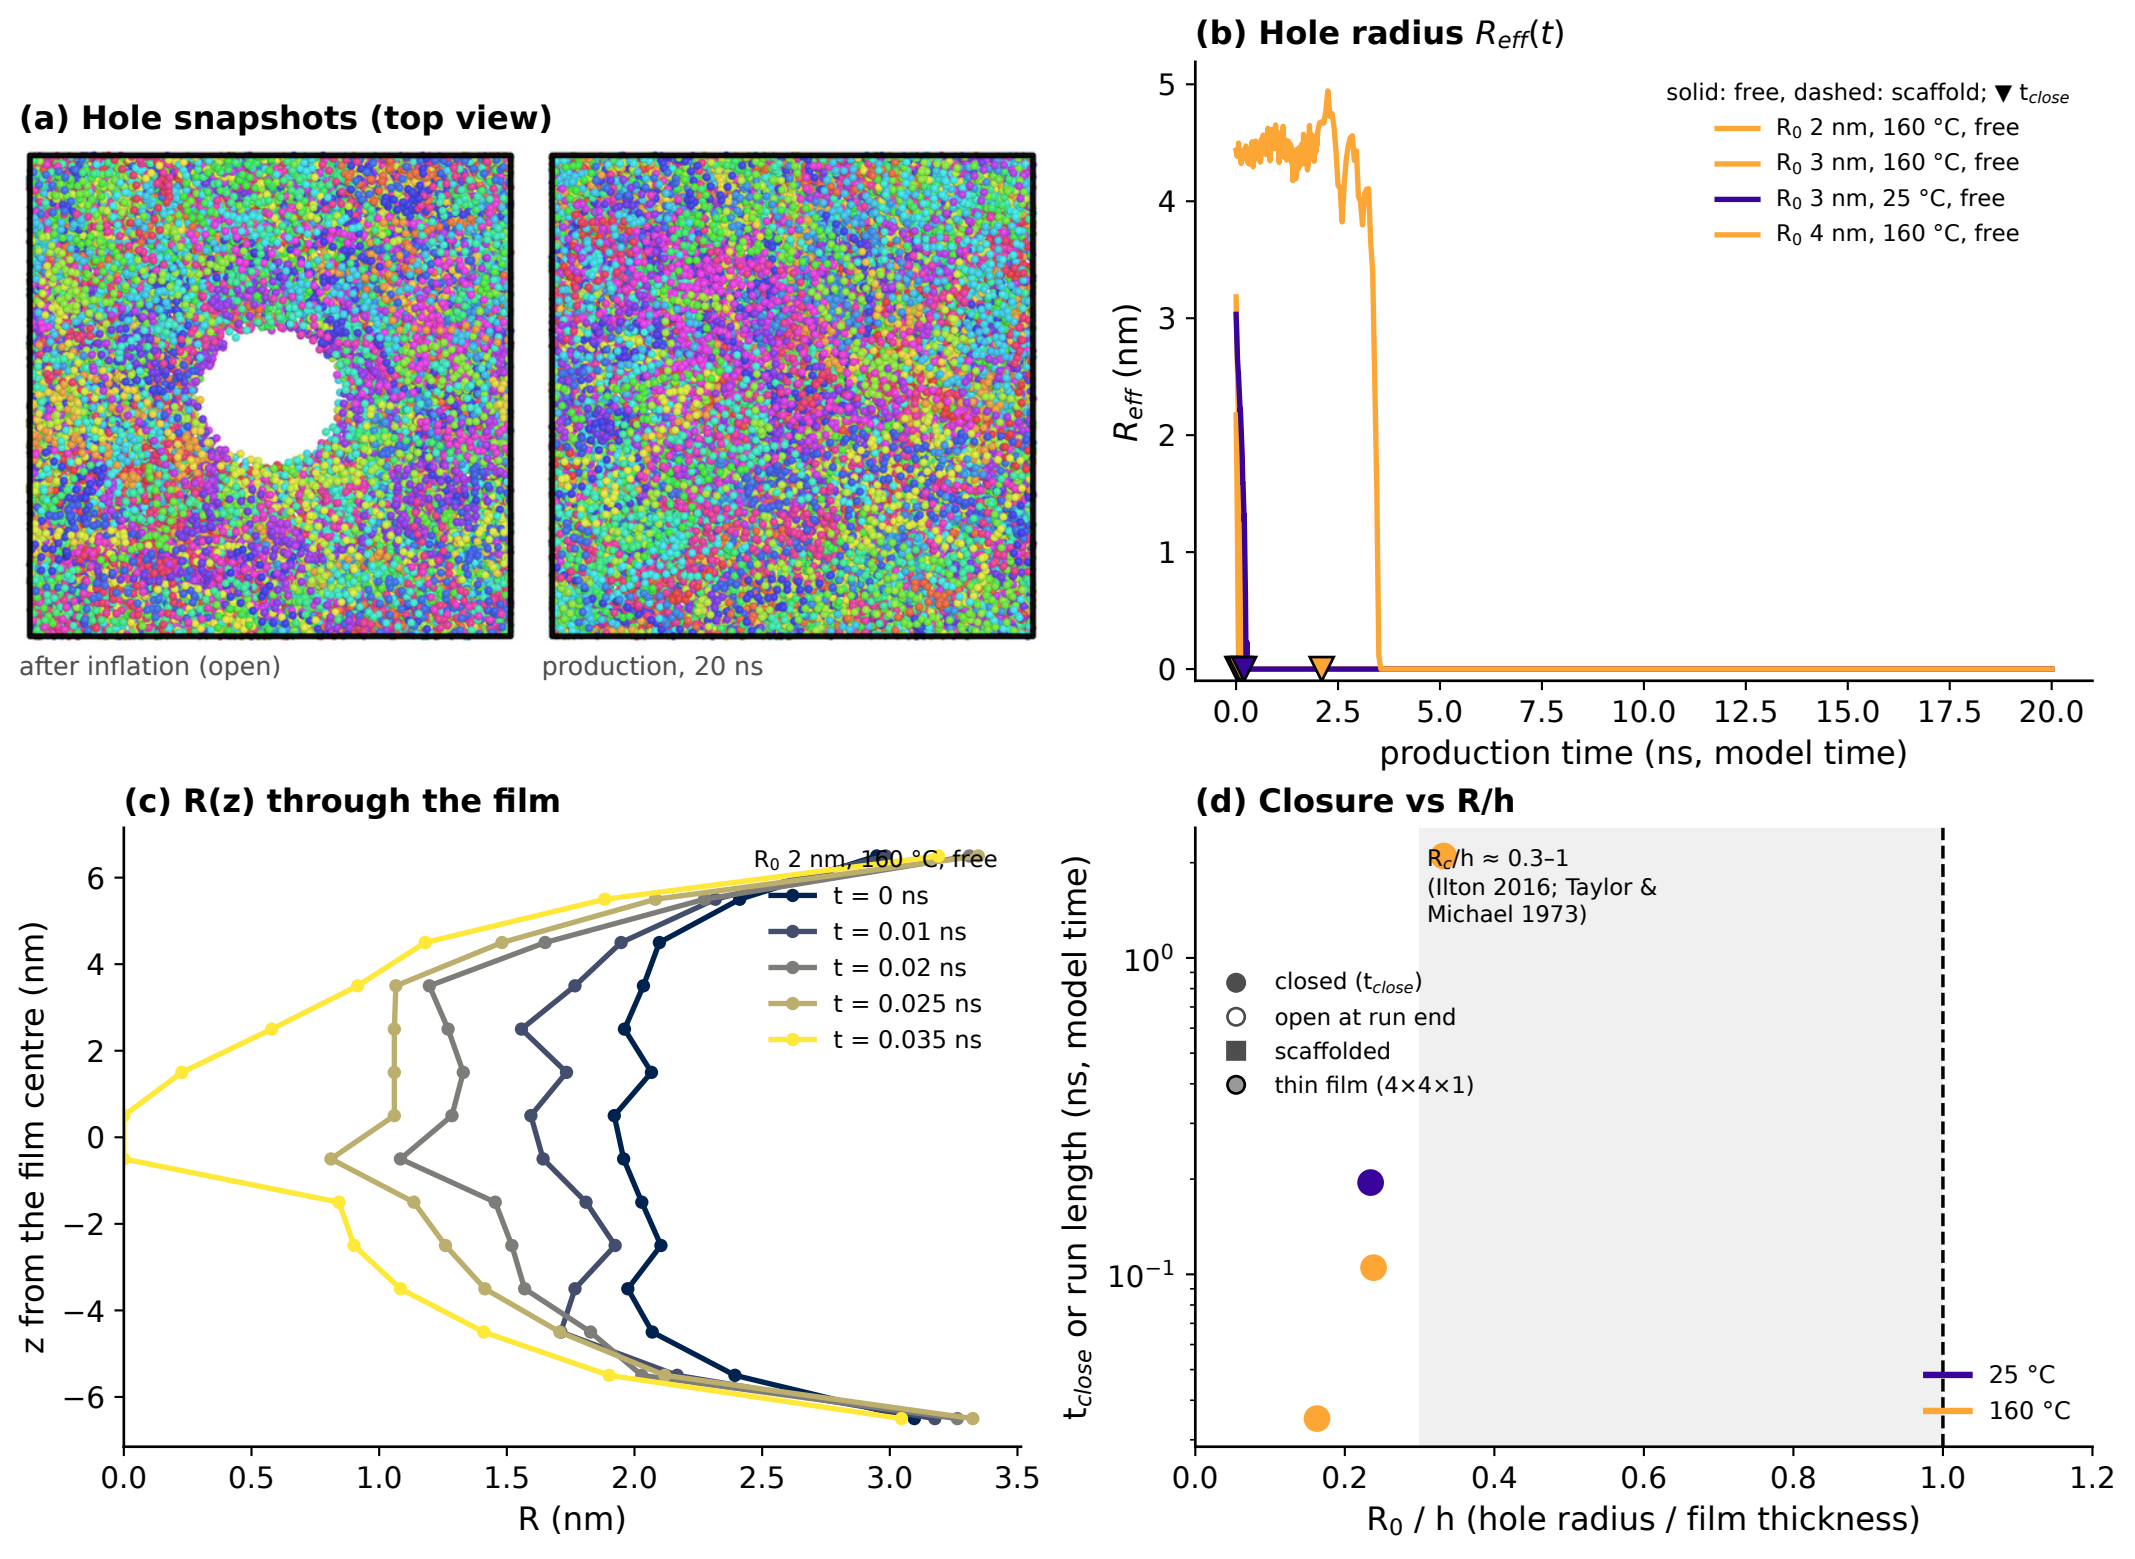

(a) Hole snapshots (top view)
after inflation (open)
production, 20 ns
(b) Hole radius $R_{eff}(t)$
solid: free, dashed: scaffold; ▼ t_{close}
R_0 2 nm, 160 °C, free
R_0 3 nm, 160 °C, free
R_0 3 nm, 25 °C, free
R_0 4 nm, 160 °C, free
R_{eff} (nm)
production time (ns, model time)
(c) R(z) through the film
R_0 2 nm, 160 °C, free
t = 0 ns
t = 0.01 ns
t = 0.02 ns
t = 0.025 ns
t = 0.035 ns
z from the film centre (nm)
R (nm)
(d) Closure vs R/h
R_c/h ≈ 0.3–1
(Ilton 2016; Taylor & Michael 1973)
closed (t_{close})
open at run end
scaffolded
thin film (4×4×1)
25 °C
160 °C
t_{close} or run length (ns, model time)
R_0 / h (hole radius / film thickness)