


3M™ Card Connector SD™

Normal Polarization, Push-Push, Surfacemount

SD Series

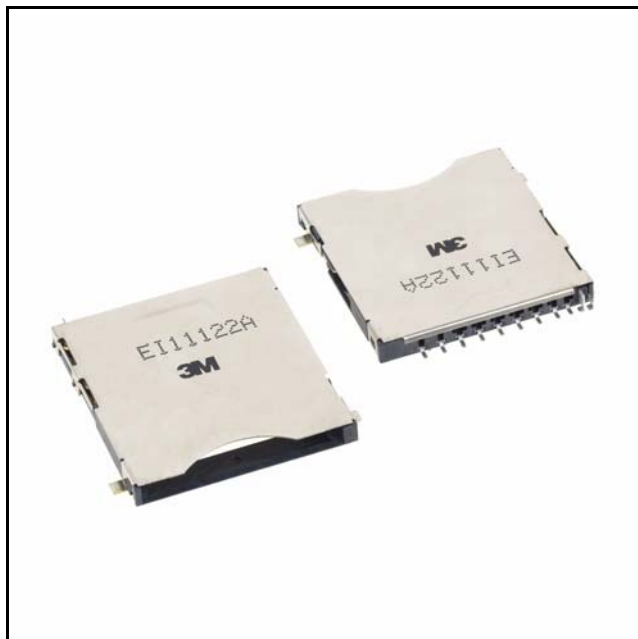

- Low profile, light weight, and small size
- Compatibility with both SD card and multimedia card formats
- Smooth push-push eject mechanism
- Write protect switch indicator
- Card polarization
- Card detection indicator
- Metal-shielded cover
- Meets SD Card Association standards for known compatibility and reliability
- Connector has a 10,000 cycle reliability
- Connector has an internal mechanical restraint providing added card retention
- RoHS* compliant

Date Modified: November 28, 2006

TS-2198-01
Sheet 1 of 3

Physical

Insulation Material: High Temperature Thermoplastic

Flammability: UL 94V-0

Color: Black

Contact Material: Copper Alloy

Contact Plating

Underplating: 50 μ " [1.27 μ m] min. Nickel

Wiping Area: 10 μ " [0.25 μ m] min. Gold

Termination Area: 100 μ " [2.54 μ m] max. Matte-Tin

Cover Material: Stainless Steel

Underplating: 50 μ " [1.27 μ m] min. Nickel

Solder Area: 10 μ " [0.25 μ m] min. Gold over Nickel on solder peg area

Lock Pin and Link Pin Material: Stainless Steel

Spring Material: Copper Alloy

Plating: 3 μ " [0.08 μ m] min. Nickel

Marking: 3M Logo



Electrical

Current Rating: 0.5 A

Insulation Resistance: 1000 M Ω min.

Withstanding Voltage: 500 V_{AC} for one minute

Operating Voltage: 3.6 V_{AC}

Environmental

Process Rating: Maximum 250°C, with 40 seconds over 230°C

Operating Temperature: -25°C to +85°C

Storage Temperature: -40°C to +85°C

**RoHS compliant* means that the product or part does not contain any of the following substances in excess of the following maximum concentration values in any homogeneous material, unless the substance is in an application that is exempt under RoHS: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's knowledge and belief based upon information provided by third party suppliers to 3M.


SD is a trademark of SD Association in Japan.

3M™ Card Connector SD™


Normal Polarization, Push-Push, Surfacemount

SD Series


Circuit :




Without card



Card Inserted
Write Protect : Lock



Card Inserted
Write Protect : Unlock

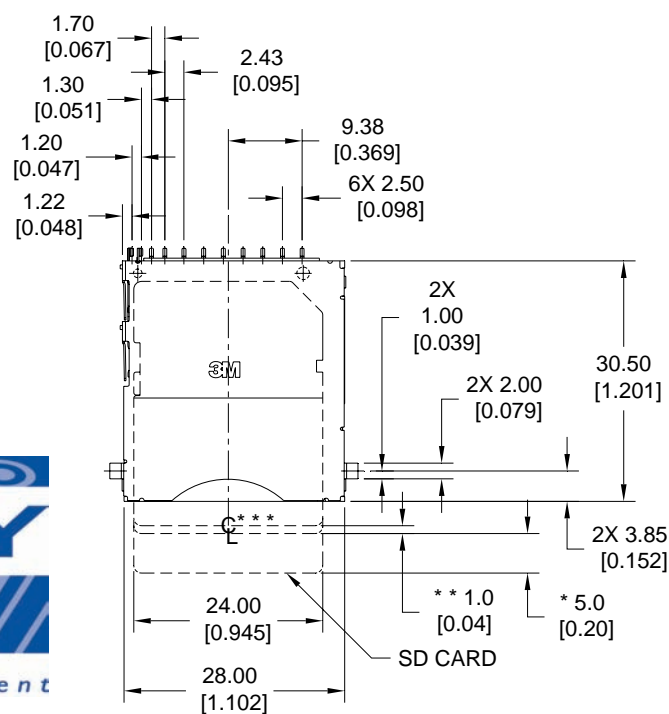

mm
[inch]

Tolerance Unless Noted			
	.0	.00	.000
mm	± .38	± .25	

[] Dimensions for Reference Only

Notes:


- * Card fully ejected position
- ** Card in locked position
- *** Card fully pushed in

TS-2198-01
Sheet 2 of 3

3M™ Card Connector SD™

Normal Polarization, Push-Push, Surfacemount

SD Series

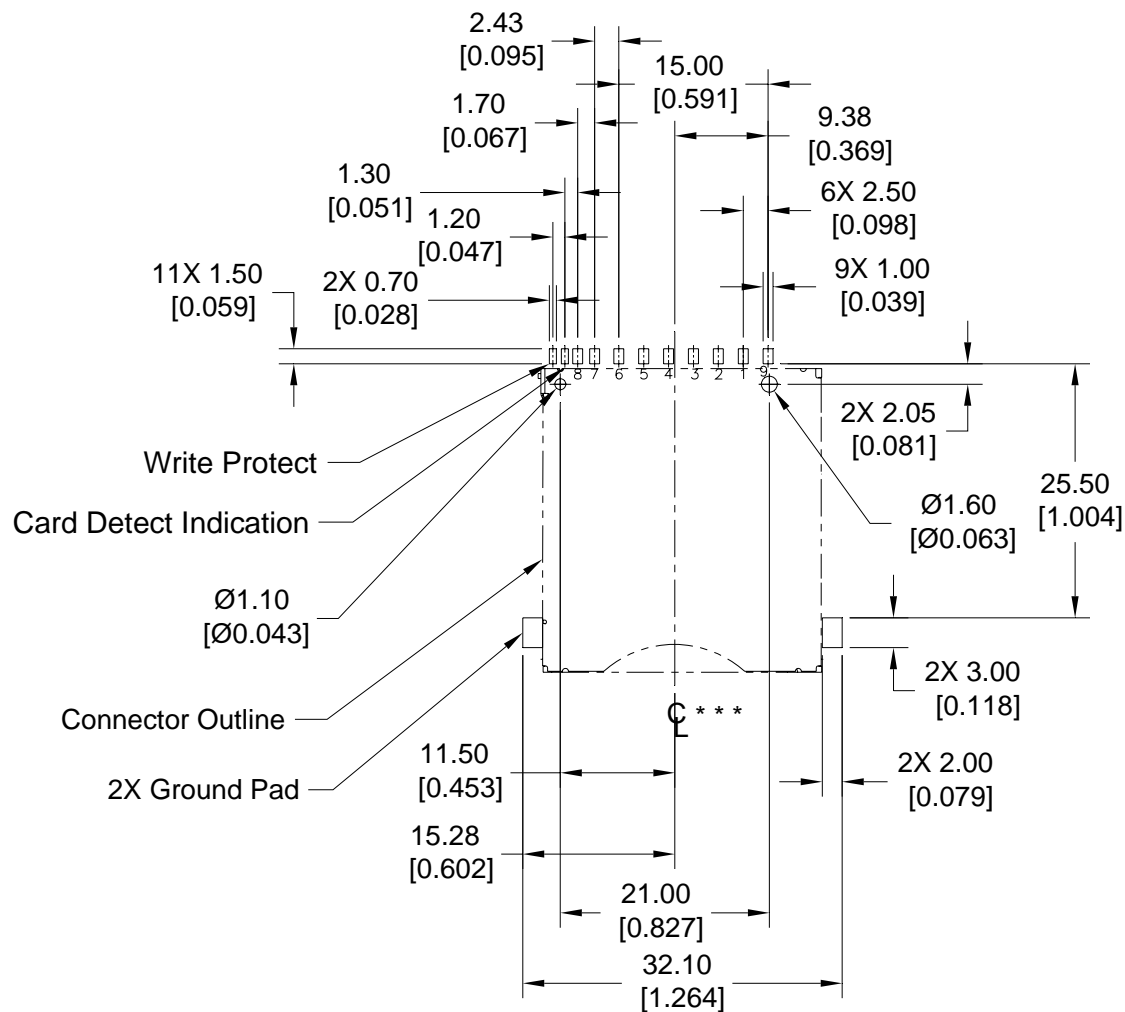


Recommended PCB Hole & Pad Layout
Top View [Tol ± 0.05 [0.002]]

Note:
*** Center Line of Card



Ordering Information

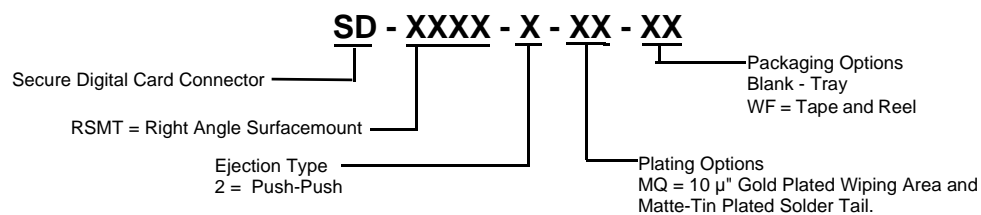

TS-2198-01
Sheet 3 of 3