



The vital component

Toby Electronics Ltd , Beaumont Road Industrial Estate, Banbury , Oxon OX16 1TU ,
England, Tel UK +44 (0) 1295 271777, Fax UK +44 (0) 1295 271744, Sales@toby.co.uk

SPECIFICATION

RATING : DC 3V~120mA


INTER-CONTACT RESISTANCE : 100m OHM MAX.

INSULATION RESISTANCE : 100M OHM MIN. AT 500V D.C.

VOLTAGE DURABILITY : NO DEGRADATION WITH DC 500V APPLIED FOR ONE MINUTE.


BH-001-BeCu

BATTERY HOLDER FOR BATTERY CR2032 :

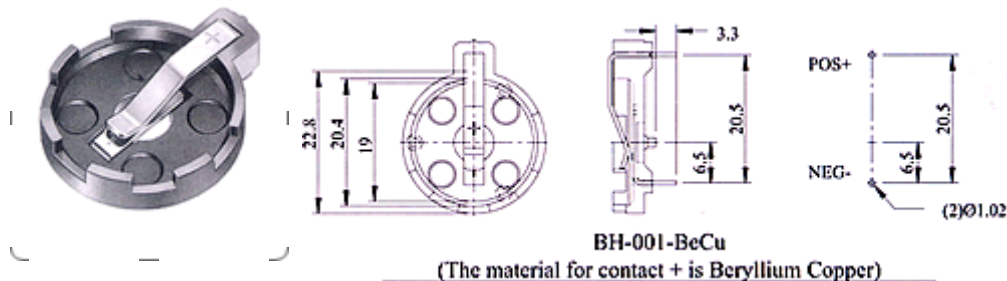

BH-001-PBSR


BATTERY HOLDER FOR BATTERY CR2032 :

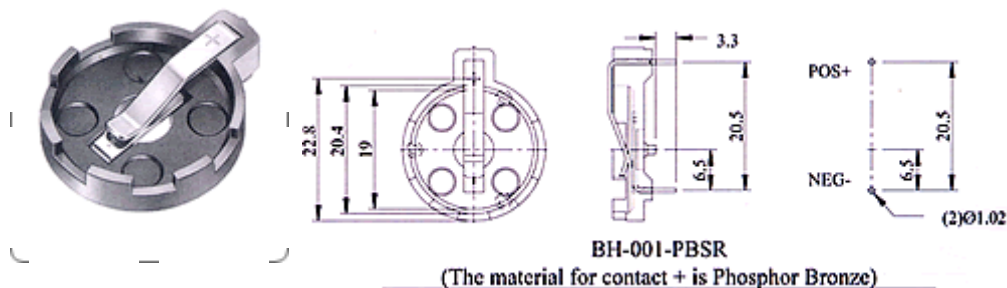

BH-002-BeCu


BATTERY HOLDER FOR BATTERY CR2425 :



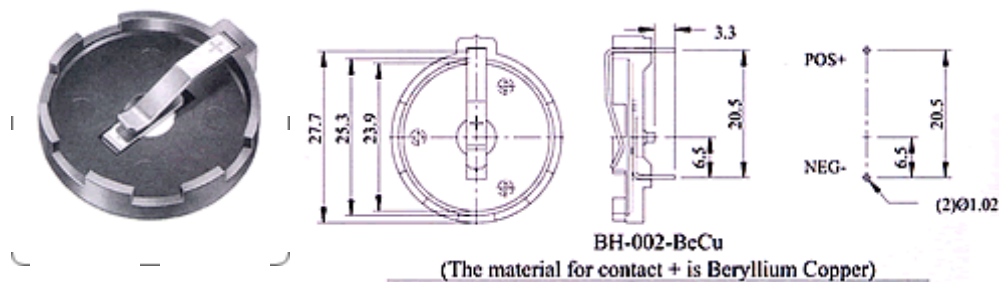


BH-002-PBSR

BATTERY HOLDER FOR BATTERY CR2425 :

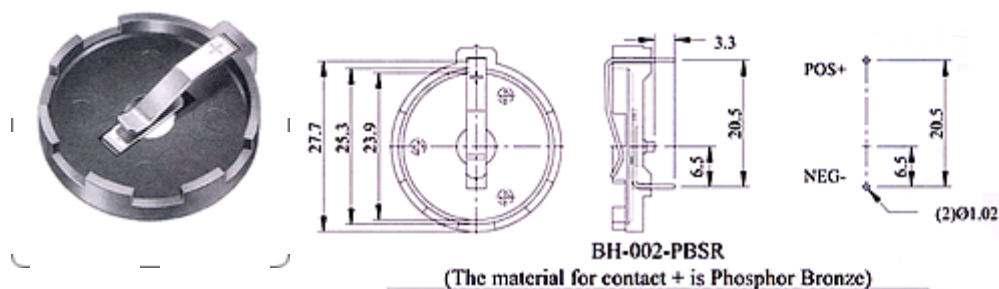


BH-004

BATTERY HOLDER (SMT TYPE) FOR BATTERY CR2032 :

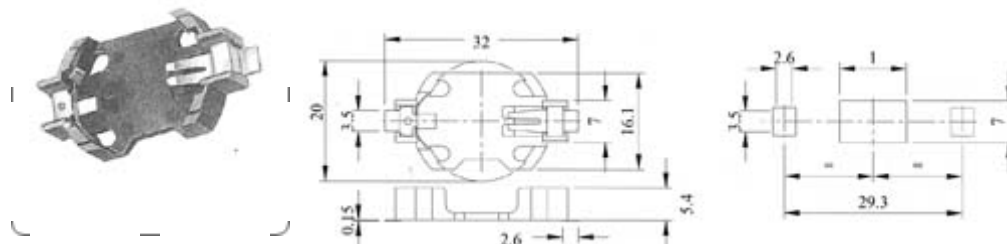


BH-005

BATTERY HOLDER FOR BATTERY CR2032 :

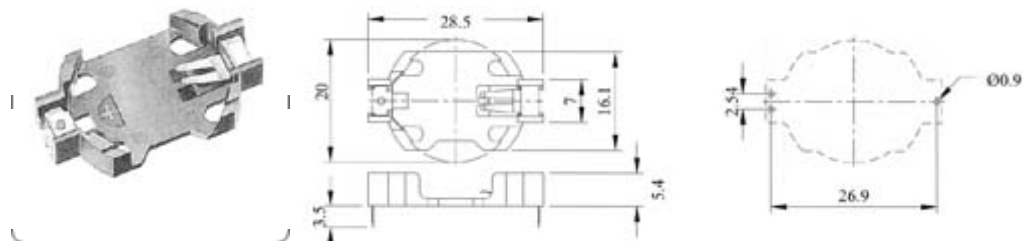


BH-006-BeCu

BATTERY HOLDER FOR BATTERY CR2032 :

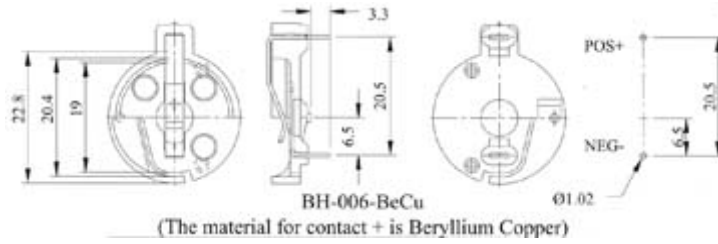

BH-006-PBSR

BATTERY HOLDER FOR BATTERY CR2032 :

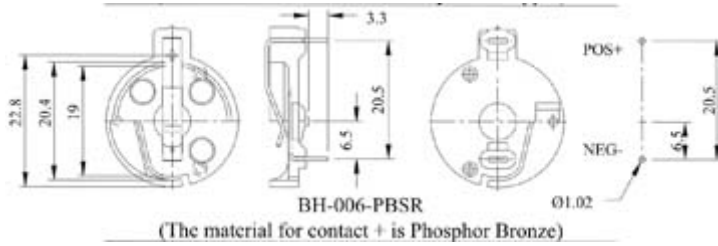

BH-008

BATTERY HOLDER FOR BATTERY CR2032 (STRAIGHT TYPE) :

