



Option: ZTA 014 0036

(36" Turret Extension)




Option: ZTA 014 0012

(12" Turret Extension)




Plan View

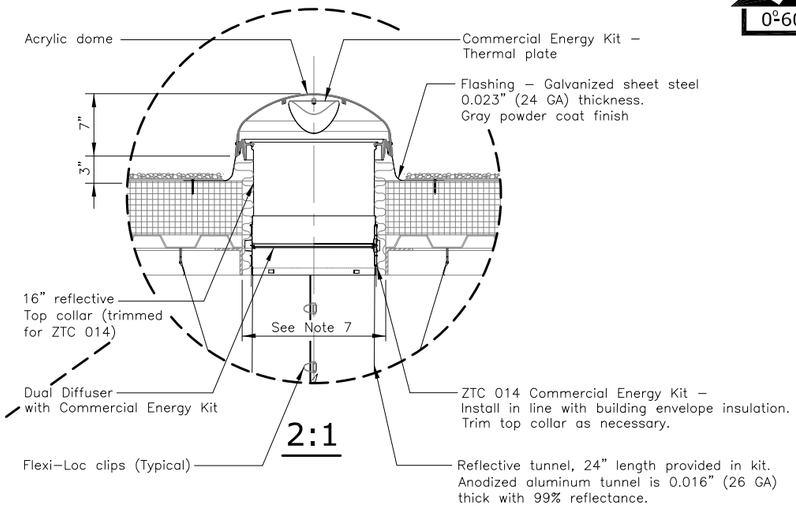

2:1



2:1 (Similar)

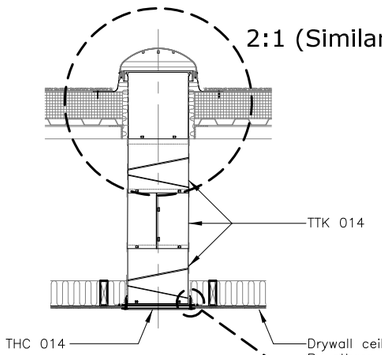


THC

Ceiling Ring Assembly

Option: TTK 014

Drywall Ceiling




TOC

Open Ceiling Diffuser

Option: ZTR 014, ZTZ 203


2:1 (Similar)

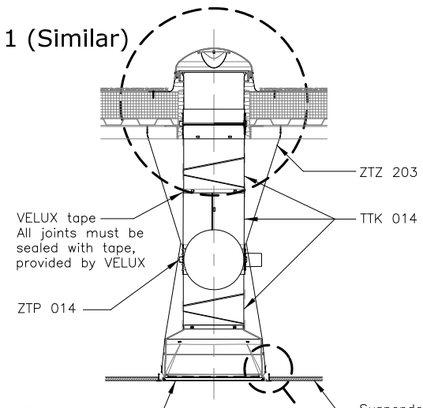


Ceiling Adapter Assembly

Option: TTK 014, ZTP 014

Suspended Acoustical Tile Ceiling

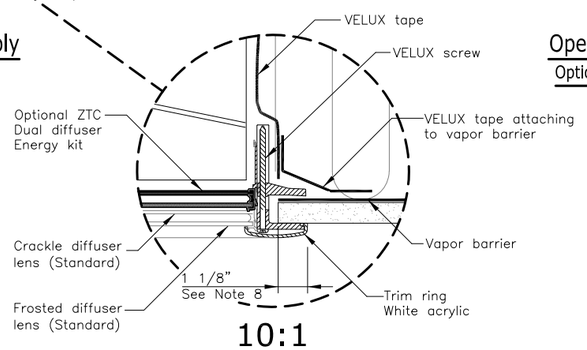

10:1



Suspended Acoustical Tile /Grid Ceiling Installation

4:1

General Notes

1. This drawing emphasizes the TGC low profile pan flashed VELUX SUN TUNNEL Skylight. It illustrates a general arrangement layout (plus recommendations) for a VELUX TGC installation in a 0–60 degree roof pitch application utilizing either a suspended acoustical tile or grid ceiling installation.

2. The architectural/structural design and specifications for the inclusion of a tubular daylighting device, such as the VELUX TGC, in any roofing/ceiling application is determined and provided by others. The design criteria includes, but is not limited to design loads, structural configurations, structural framing member sizes and material , architectural finishes and integration with the roofing/ceiling systems of the building. VELUX assumes no responsibility or liability in the design, construction and performance of a building structure by others.

3. Secure eye screws/bolts to the roofing structure and attach suspension wire to connect to clips at end of tunnel section.

4. Secure suspension wires to the ceiling adaptor assembly & eyebolts.

5. Dimensions shown are nominal, unless indicated otherwise.

6. Rough opening dimensions vary with roof slope. Roof opening dimensions are referenced in the TGC/TMC + TTK Installation Instructions.

7. VELUX recommends fastening TGC flashing to roof decking or roof framing.

8. Minimum 1 1/4" clearance required around ceiling rough opening, to fit trim ring.

TGC 014 Components

TGC 014 0000

- Acrylic Dome
- Counter flashing assembly
- Top collar (16"/.41m)
- Hardware bag
- Option
  - TCC 014 1000 – Impact Polycarbonate dome

Option: ZTA 014 0012

- Turrent extender 12 inch

Option: ZTA 014 0036

- Turrent extender 36 inch

Option: TTK 014 Elbows & Rigid Tunnel

- 24"/.61m Rigid tunnel
- (2) 12"/.30m Rigid elbows
- Tape for tunnel joints
- Hardware bag

Option: ZTR 014 Rigid Tunnel Extensions

- ZTR 014 0002 24"/.61m Rigid tunnel
- ZTR 014 0004 48"/1.22m Rigid tunnel
- ZTR 014 0006 72"/1.83m Rigid tunnel
- ZTR 014 0012 144"/3.66m Rigid tunnel
- ZTR 014 0024 288"/7.32m Rigid tunnel

Option: ZTZ 203

- Suspension Wire Kit

Option: ZTC 014 0401US

- Commercial Energy Kit
  - Insulating pane – thermal break
  - Thermal plate

Option: TOC 014 0002 Open Ceiling Diffuser

- TOC 014 0002 – Prismatic diffuser
- Options
  - TOC 014 0000 – Frosted diffuser
  - TOC 014 0003 – Fresnel diffuser

Option: ZTP 014 Daylight Controller

- KES 160 Control System also required for control & power to ZTP 014
- Option
  - ZTP 014 0000P Plenum rated daylight controller

Option: THC 014 0002 Drywall Ceiling Diffuser

- Ceiling ring assembly with prismatic diffuser
- Tape for tunnel joints
- Gasket material for diffuser
- Hardware bag
- Options
  - THC 014 0000 – Frosted diffuser
  - THC 014 0003 – Fresnel diffuser

Option: TTC 014 0002 Tile Ceiling Diffuser

- 14" to 22" Transition piece
- Ceiling adapter assembly with prismatic diffuser
- Tape for tunnel joints
- Gasket material for diffuser
- Hardware bag
- Suspension wire
- Options
  - TTC 014 0000 – Frosted diffuser
  - TTC 014 0003 – Fresnel diffuser

VELUX
Sky-Global Product Management

VELUX
1418 Evans Pond Road
Greenwood, SC 29649
1-800-88-VELUX
www.VELUXUSA.com

TGC 014 - Commercial SUN TUNNEL Skylight

This drawing is an instrument of service and is provided for informational use only.

© 2015 VELUX GROUP

® VELUX is a registered trademark