



KANALSKI POKLOPAC - SAMOZATVARAJUĆI MANHOLE COVER

Ø 600 mm C250 / D 400

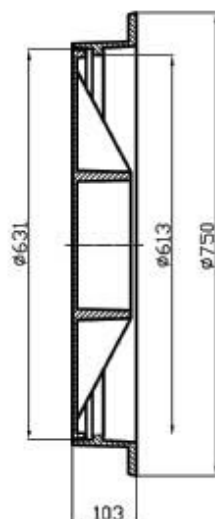

Hc Hf

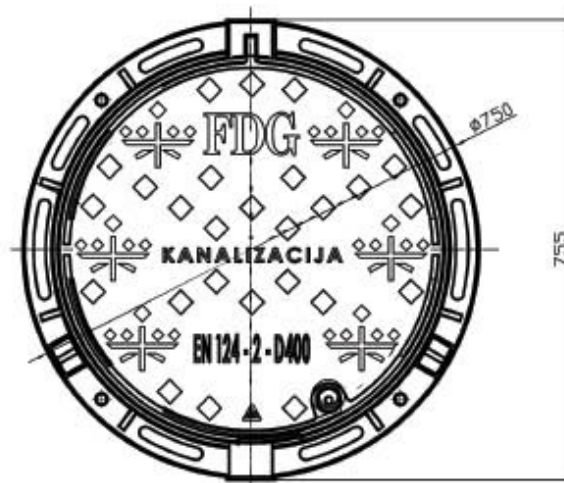

Svi proizvodi zaštićeni su zaštitnom bojom otpornom na temperaturu i koroziju.

Zaštitna boja ne sadrži elemente koji bi štetno djelovali na pitku vodu.

All the products are protected with temperature and corrosion-proof protective paint, which contains no elements which are harmful for drinking water.



zaključavanje, elastična opruga, brava, amortizirajuća brtva

Artikl	Oznaka	Nosivost, kN	Svjetli otvor Ø LW mm	Poklopac mm	Okvir mm	Hf mm
		HRN EN 124-2				
608 AQ B	Fi 600	C 250	603	630	750	103
605 P	Fi 600	D 400	603	630	750	103

Poklopac sa šarnirom, sa sigurnosnom pozicijom od 75°, odvojiv kod 90° i za potrebe kontrole od 102° otvorenosti, obručni, zamjenski i amortizirajući uložak koji osigurava pored vertikalnog također i horizontalno prigušivanje, sigurnost poklopca u okviru putem lijevanje elastične opruge, centriranje poklopca u okviru.
Mogućnost dodatnog zaključavanje preko brave sa vijkom.

Manhole lid with hinge link connector with safety position of 75°, detachable at 90° for the purposes of control of 102° openness, hoop, replacement and damping cartridge that provides both vertical and horizontal jamming, the safety of the lid in the frame provided by cast elastic springs, and lid centering in the frame.
Possibility of additional locking via lock with screw.