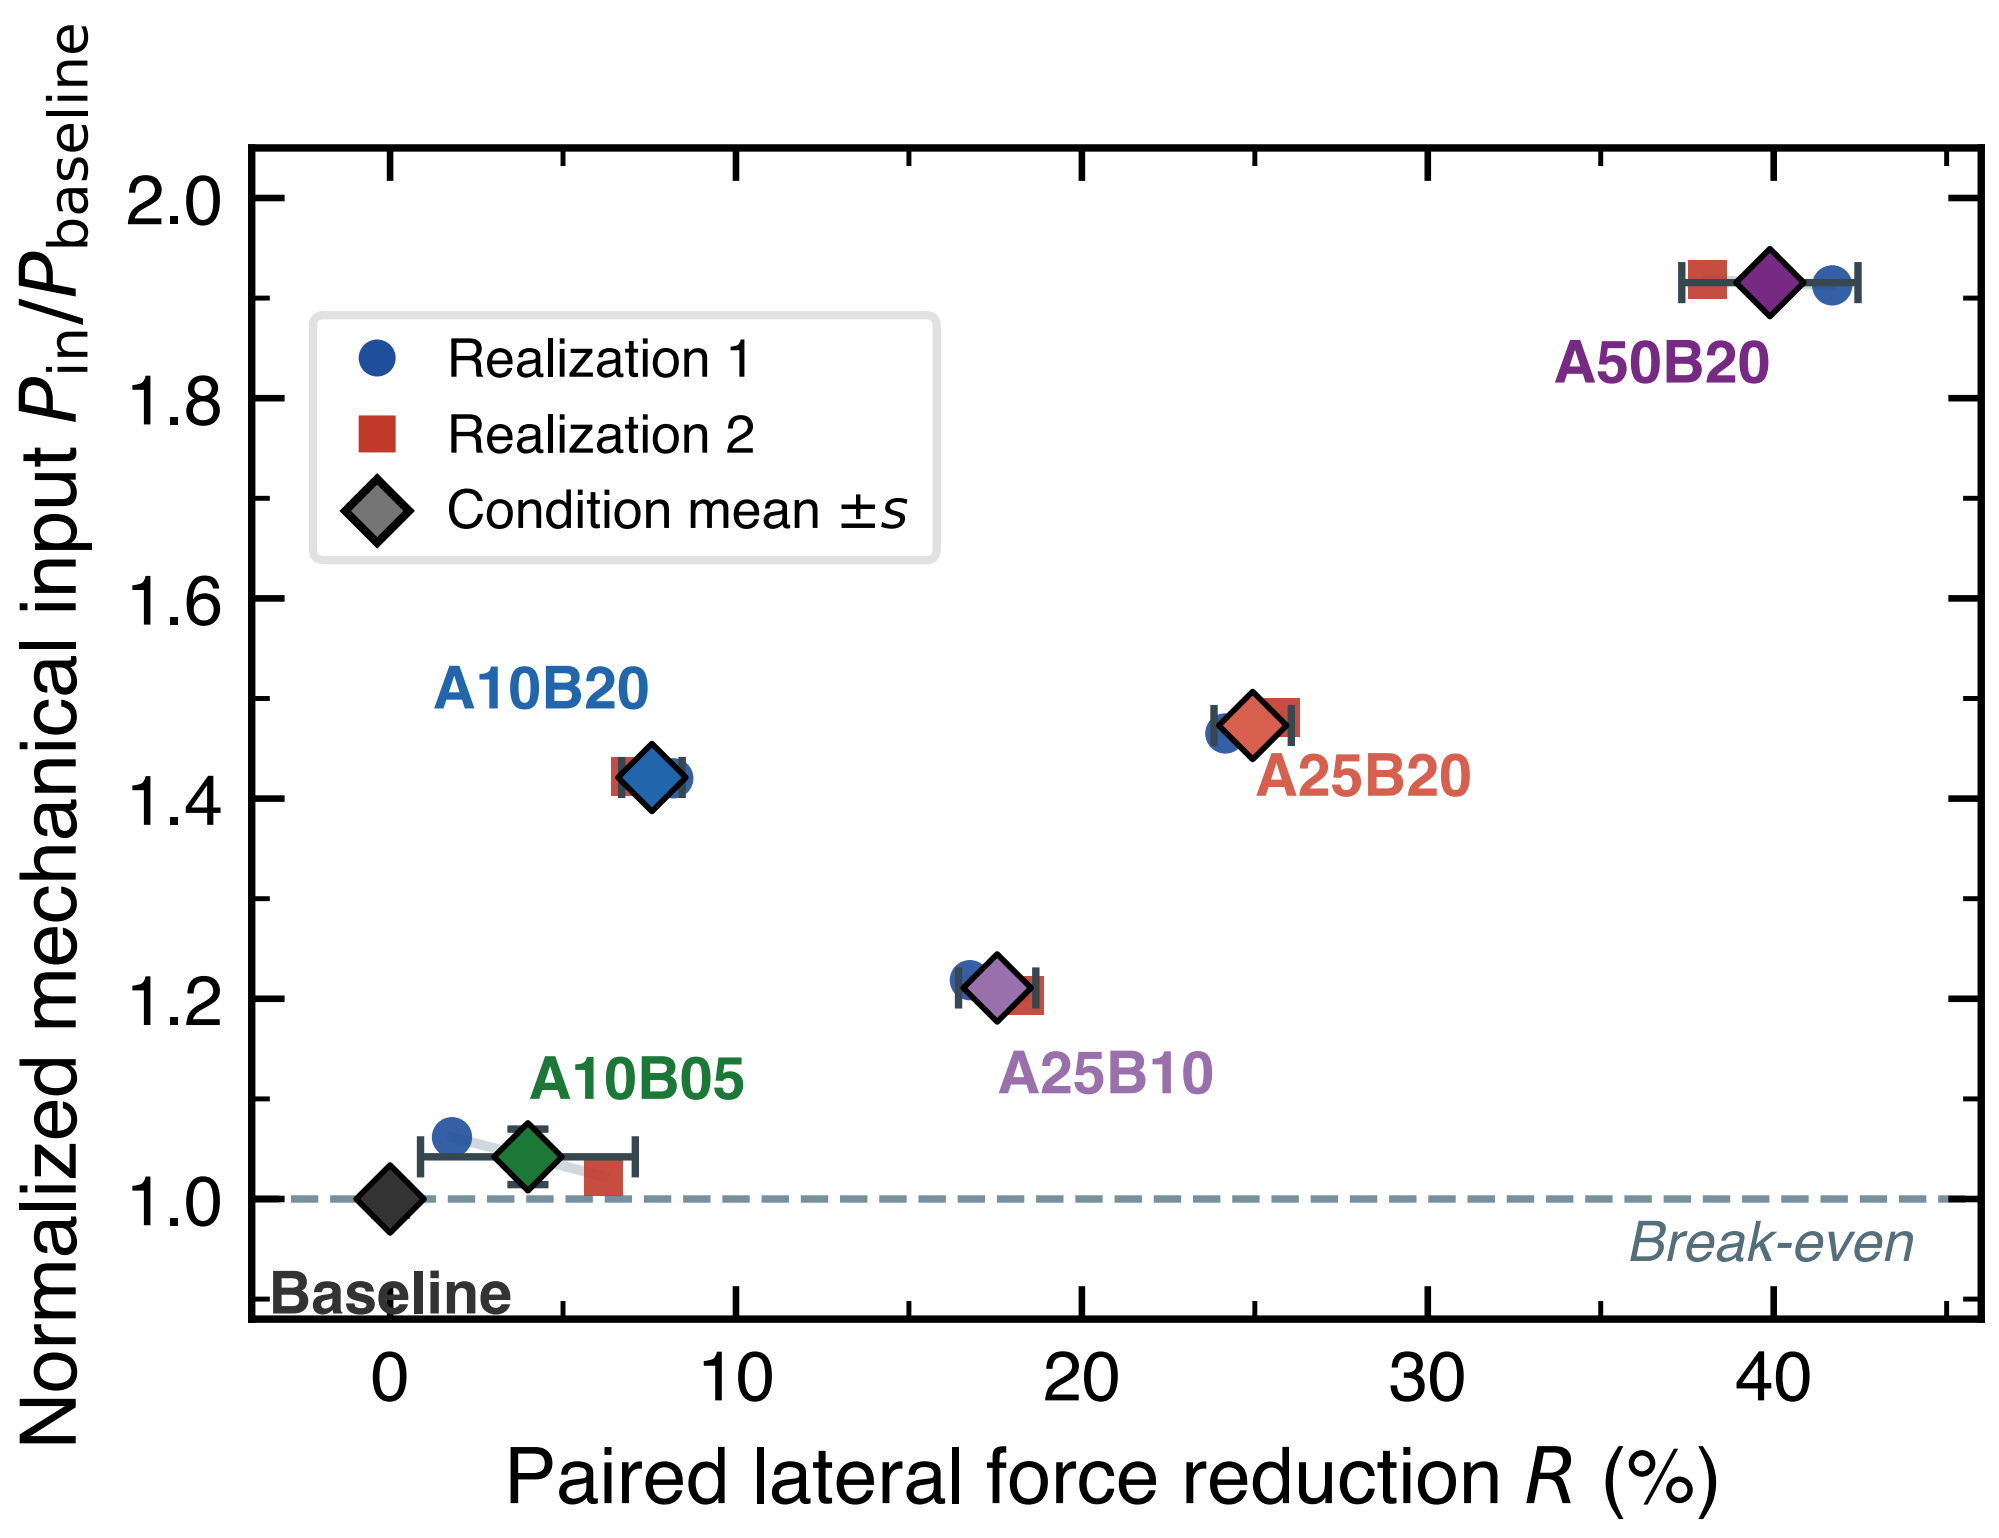
Normalized mechanical input $P_{in}/P_{baseline}$
2.0
1.8
1.6
1.4
1.2
1.0
Realization 1
Realization 2
Condition mean ±s
A50B20
A10B20
A25B20
A25B10
A10B05
Baseline
Break-even
0
10
20
30
40
Paired lateral force reduction R (%)