1 / End-wall and screw-boss correction

PLAN DETAIL / positive u end / F01-F04, 8:1 (local u right, v down)

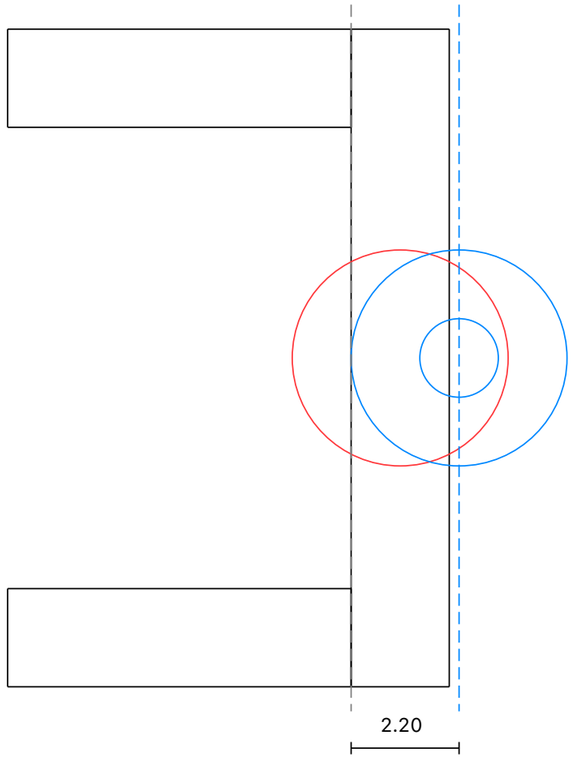

RED = existing B26 boss; BLUE = proposed boss and pilot.

Existing end wall and wings remain in B26 positions. Same positive/negative-u correction at each end.

Wall inner face |u|=31.75 (F01-F04) / 31.60 (F05). Post radius 2.20, pilot radius 0.80.

New axis = wall inner face + 2.20; new post inner face is flush with the wall inner face.

Current post axis is wall inner face + 1.00; each post/pilot moves outward 1.20 from B26.

No change to fader center, walls, wings, bottom rails, blade, cap or panel slot.

Role: C04/C05/C06 lower shell integral bosses, printed PETG. Local coordinate origin is fader center.

The grey line is a datum extension; colored outlines overlap and are not separate printable bodies.

Projection convention: orthographic plan. mm throughout. Derived proposal; no physical fit approval.

HOLD: check all boss/support/retainer neighbors, screw heads and driver envelopes before any release.

Approval of this named drawing is required before modifying B26 CAD geometry.

2 / Retainer definition, positions and assembly

RETAINER PLAN / positive u end / all five faders / 8:1

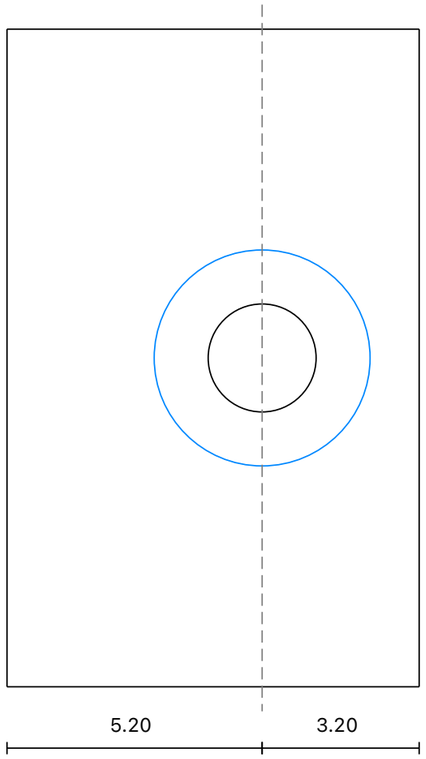

8.40 x 13.40 x 1.50; centered v=0. Through D2.20; 90-degree countersink D4.40 top.

Top D4.40 meets bottom D2.20 at 1.10 below retainer top. Nominal outside material at outer end = 1.00.

Inner edge remains |u|=28.75 / 28.60; outer edge |u|=37.15 / 37.00; axis |u|=33.95 / 33.80.

First value F01-F04, second F05. Reverse u sign for the opposite end; z positions remain as B26.

F01/F02/F03/F04: pilot axes +/-33.95, spacing 67.90; F05 +/-33.80, spacing 67.60.

For F01-F04 (X,Y)=(X0+v,Y0+u); F05 (X,Y)=(X0+u,Y0-v); Z up; rear-left datum B26.

Printed PETG: one integral end boss per end, two retainer bridges per fader; 5 faders / 10 bridges.

Inherited trial fastener: M2x6 countersunk, max head D4.40; pilot D1.60, modeled depth 5.50.

Nominal 60 mm body gives 1.75 mm (F01-F04) / 1.60 mm (F05) per end to boss at centered pose.

Actual body/tabs, screw head, accessible driver, panel interaction, retention and PETG strength TBD.

2D proposal only. No CAD, STL, STEP, physical fit or manufacturing release follows from this draft.

Basis: approved B26-INTEGRATED-01 + B26-DETAIL-01 sheet 3; only described boss/bridge delta changes.