







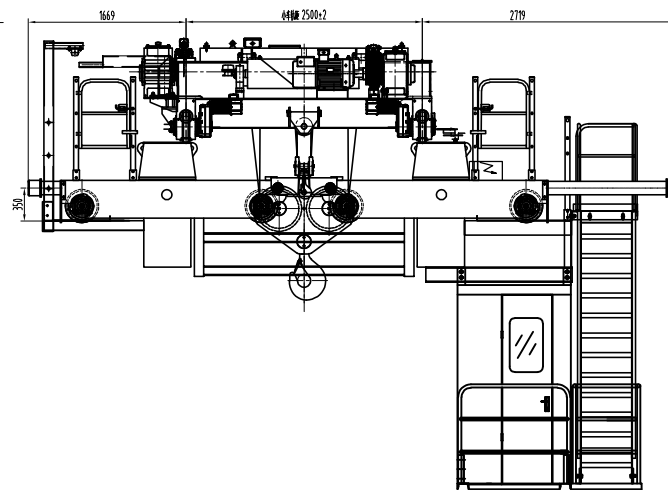


1. 桥梁的制作应符合GB/T3811-2008及GB/T14405-2011及GB6067.1-2010的相关标准。
2. 主梁与端梁连接按照GB/T5782-2000高强度螺栓副安装。连接之前必须把连接板拆除，安装时用力矩扳手拧紧，并作防松标记。
3. 本图司机室位置：左挂顶后开门。
4. 温馨提示：操作时，吊具下严禁站人。

1. The production of cable trays should comply with the relevant standards of GB/T3811-2008, GB/T14445-2011, and GB6461.1-2010.
2. The connection between the main beam and the end beam shall be installed with high-strength bolt pairs in accordance with GB/T5782-2000. Before connecting, the connecting plate must be derusted, tightened with a torque wrench during installation, and marked with anti loosening marks.
3. Location of the driver's cab in this picture: left hanging roof with rear door opening;
4. Kind reminder: It is strictly prohibited to stand under the lifting equipment during operation.

起重臂长度	32/5t
起重能力	
臂长	19.5 m
臂度	
起升高度	15.5m
主起升速度	0.5-5m/min 变频
副起升速度	0.9-9m/min 变频
小车运行速度	3-30m/min 变频
大车运行速度	6-60m/min 变频
电源	380/48V/50Hz
整机工作级别	FEM A3
小车工作级别	FEM M3
大车工作级别	FEM M3
整机电机功率	59.9 kW
最大轨压	116.6 kN
小车轨道	QU70

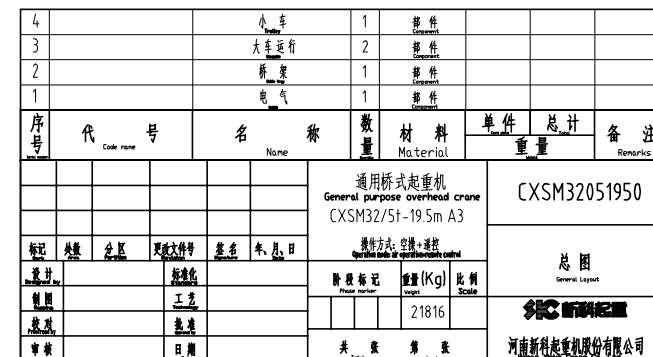



技术要求:

- 1、小车的装配与试验应符合GB/T14405-2011之规定。
- 2、所有垫板、挡铁在装配调整合格后降在小车上架,焊条采用 E4303, 焊高8mm,可焊透满焊。
- 3、各机构应保证安装精度,特别是电动机与减速机轴的轴线安装精度。
- 4、安装试车应保证驱动轴的径向跳动公差、整个机构的噪音不大于85分贝。
- 5、所有工艺孔应有工艺堵塞。

Technical Requirements

- Technical Requirements
1. The assembly and testing of the car shall comply with the provisions of GB/T14405-2011.
 2. All pads and rails are welded onto the trolley frame after assembly and adjustment. The welding rod used is E4303, with a welding height of 8mm and a fully welded edge.
 3. Each institution should ensure installation accuracy, especially the axis installation accuracy of the motor and reducer.
 4. Installation and testing should ensure that the radial runout tolerance of the brake wheel and the overall noise of the mechanism are not greater than 85 decibels.
 5. All process holes should have process hole covers.

B9	GB/T93-87	垫圈10 Washer	24	65Mn	0.002	0.048
B8	GB/T6170-2000	螺母M10 Nut	24	8	0.007	0.168
B7	GB/T5782-2000	螺栓M10×35 Bolt	24	8.8	0.043	1.032
B6	GB/T93-87	垫圈12 Washer	8	65Mn	0.002	0.016
B5	GB/T6170-2000	螺母M12 Nut	8	8	0.011	0.088
B4	GB/T5782-2000	螺栓M12×50 Bolt	4	8.8	0.06	0.24
B3	GB/T5782-2000	螺栓M16×60 Bolt	4	8.8	0.106	0.424
B2	GB/T93-87	垫圈16 Washer	8	65Mn	0.005	0.04
B1	GB/T5783-2000	螺栓M16×55 Bolt	4	8.8	0.097	0.388
36	SM(IV)2000.3-2	起升高度限位器限位开关压配 Limit switch with stopper for use for lifting motor	1	零件 Part	9.7	
35		小车名称 Trolley designation	1	零件 Part	0.03	0.03
34	GB8918-2006	8×K26WS-16mm-IWR1960	2	成品 Finished product	101.7	203.4
33	MT09.32.00-M5	32T 断式吊钩组(M5) 32T hook assembly	1	零件 Part	536	536
32	DG05	5T 断式吊钩组 5T hook assembly	1	成品 Finished product	26	26
31	GB8918-2006	8×K19S-10mm-IWR1960	1	成品 Finished product	84	84
30	LX10-32	起重限位开关 Limit switch with stopper	2	成品 Finished product	3.2	6.4
29	SM (V) 3200.9-1	滑轮架 Trolley frame	1	零件 Part	4.95	4.95
28	SM (V) 3200.7-1	绳头固定装置 Rope head fixing device	1	零件 Part	4.6	4.6
27	HCQ-C	抓板夹持器 Grabber clamping device	1	成品 Finished product	1.5	6
26	SM (V) 3200.5-1	小车栏杆 (二) Trolley railing	4	零件 Part	14.4	14.4
25	SM (V) 3200.8-1	小车运行机构 Trolley running mechanism	2	成品 Finished product	128	256

性能参数表							
机构名称		起升机构		机构名称		运行机构	
主要参数		主起升	副起升	主要参数		运行机构	
额定载荷	t	32	5	轨距	mm	2500	
最大起升高度	m	15.5	15.5	滑轮型号		HCQ-C	
起升速度	m/min	0.5~5	0.9~9	运行速度	m/min	3~30	
工作制度		M3	M3	工作制度		M3	
电源		三相交流 50HZ 380V					
钢丝绳	结构	8xK26WS-16mm-1WR1960	8xK19S-10mm-1WR1960	钢丝绳号	方戟4x160		
	支数	2x4	4	车轮直径	mm	4x1250	
	工作拉力 KN	39.8	7.85	最大轮压 KN	104.5		
卷筒直径 mm		φ435x2200	φ313x1200	三合一减速机 Three-in-one Reduction gear	SF5072W2MPY130M4N04 Pn=2x2.2kw		
电动机	型号	YZP225M-6C	YZP160M2-6C				
	功率 KW	35	8.5				
	转速 r/min	982	970				
	电动机	型号	YWZ9-315/E50				
梅花联轴器		型号	MLLZ7-315	MLLZ5-200			
减速机		型号	TH31H8-71-B-88 i=71	TH31H5-56-B-88 i=56			
最慢起升限位开关		QGX-DE-1B (1:100)		QGX-DE-1A (1:50)	限位限位开关		
					XCKVR54D1H29		

24	SM (V) 3205.2-1	小车运行报警平台 乗車台の313x1200	1	附件	70.3	70.3	
23	V5T313	乗車台の313x1200	1	附件	228	228	
22	DHL05	5t定滑轮组	1	附件	14	14	
21	SM(V)1632.4-1	电动机底座 (H=100)	2	附件	12.74	25.48	
20	YZP160M2-6C	电动机	1	部品	133	133	8.5KW
19	MLZ5-200 YZP170 YZP170	制钢滑轮吊钩吊钩装置	1	部品	16.7	16.7	
18	SM(V)1632.3-1	制钢底座 (H=100)	1	附件	7.3	7.3	
17	YWZ9-200/E30	制钢器	1	部品	42	42	
16	SM(V)1632.2-1	减速机底座	1	附件	1.05	1.05	
15	TH3HH5-56-B-88	减速机	1	部品	320	320	i=56
14	SM(V)-XCDR	吊钩	4	附件	1	4	
13	QGX-DE	端转限位开关	2	部品	1.5	3	
12	TY006G	小车运行限位开关装置	1	附件	2.9	2.9	
11	VT435	乘車台の435x2200(右)	1	附件	864	864	
10	DHL32	32t定滑轮组	1	附件	163	163	
9	SM(V)3205.1-1	小车架	1	附件	1234	1234	
8	SM(V)3200.2-1	小手柄 (-)	1	附件	10.9	10.9	
7	SM(V)1600.2-2	电动机底座 (H=30)	2	Q235-B	10.8	21.6	
6	YZP225M-6C	电动机	1	部品	352	352	35KW
5	MLZ7-315 YZP185 YZP185	制钢滑轮吊钩吊钩装置	1	部品	44	44	
4	SM(V)3200.1-1	制钢器底座 (H=30)	1	Q235-B	14.4	14.4	
3	YWZ9-315/E50	制钢器	1	部品	86	86	
2	DDJ-625	小车司机架	1	附件	28	28	
1	TH3HH8-71-B-88	减速机	1	部品	635	635	i=71

序号 Serial number	代 号 Code name	名 称 Name	数 量 Quantity	材 料 Material	单件	总计	备 注 Remarks	
					重 量			
			小车图 Trolley diagram 3205f M3			SM(V)3205-625		
标记	数量	分型	更改文件号	签名	年、月、日	部 件 Component  河南新科起重机械股份有限公司		
设计		标准化		检验标记	重量(Kg)			比例
制图		工艺			6010			1:20
校对		标准						
审核		日期		共 张	第 张			

合同编号: 26030625