



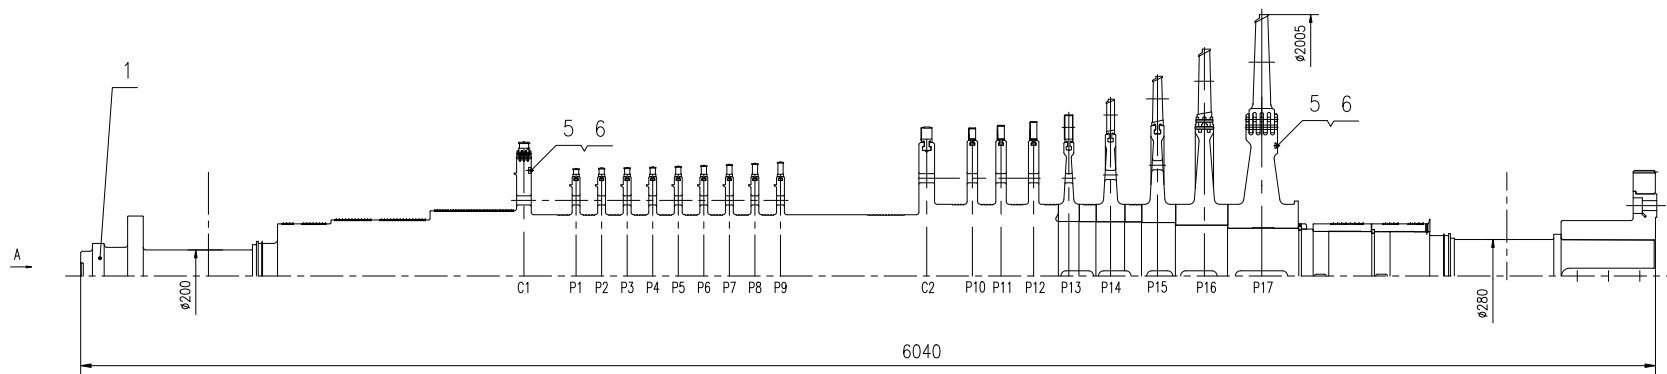

动静间隙图
Clearances between dynamic and stationary parts

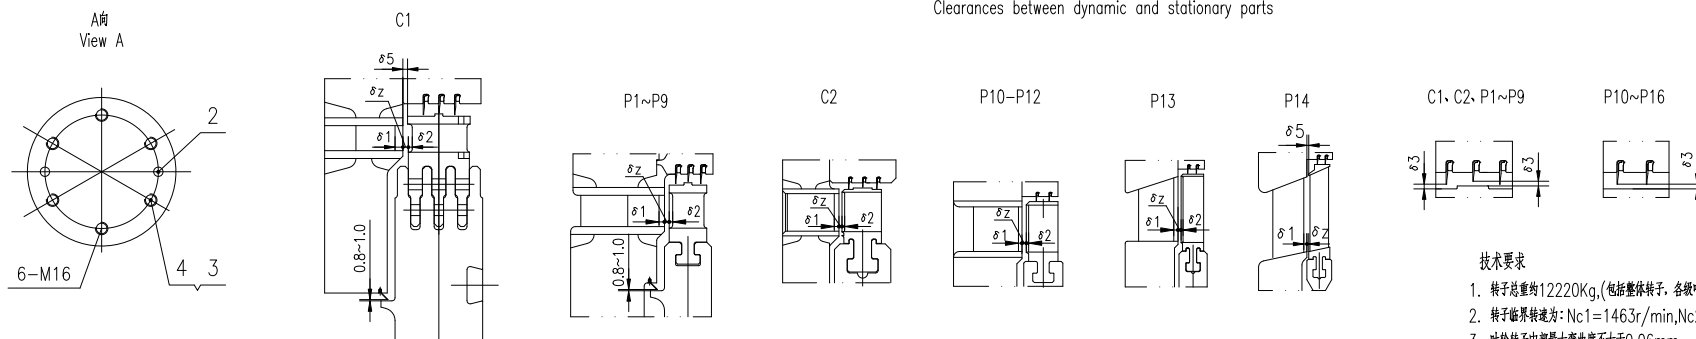

叶片动静间隙
Clearances between dynamic and stationary

代号	级数	C1	P1-P9	C2	P10-P12	P13	P14	P15	P16	P17
delta 1	5	3.5	5	5	5	5	10.3	15		
delta 2(delta 4)	3.5±0.3	3±0.2	3±0.2	3±0.2	3±0.2	4.65±0.3	7±0.5	7±0.5	15.75	
delta 2	2.5	2.2	2	2	2					
delta 3		1.0~1.2		1.0~1.2		1.0~1.35				
delta 5	3±0.2					3.35±0.3	10±0.8	11±1.0	20	


技术要求

- 转子总重约12220Kg,(包括整体转子,各级叶轮叶片,汽轮机端联轴器,主油泵,危急遮断器)。
- 转子临界转速为: Nc1=1463r/min,Nc2=5065r/min。总转动惯量1294Kg.m²。
- 叶轮转子中最大弯曲度不大于0.06mm。
- 动静部分同轴度应符合以下规定: (mm)


NOTES:

- Rotor weighs 12220kg in total, consisting of an integral rotor, bladed wheels of all stages,coupling at turbine side, main oil pump and emergency governor.
- Critical speed of rotor: Nc1=1463r/min,Nc2=5065r/min. rotational inertia 1294Kg.m²。
- With wheels being shrunk on, rotor will have the maximum bending not greater than 0.06mm at its middle part.
- Axiality between rotational and stationary parts will comply with following specification: (mm)


名 称 Description	a-b	c-(a+b)/2
转子与汽缸 Rotor and casing	±0.05	0.05-0.06
转子与转筒、叶片、隔板汽封、轴颈 Rotor and guide blade carrier, diaphragm gland, bearing housing	±0.10	±0.05
转子与轴盖 Rotor and oil retaining ring	0.04-0.08	0.04-0.06




前汽封1段详图
Detail of front gland

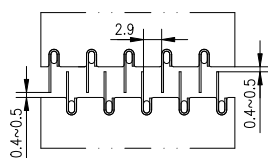


前汽封2、3、4段详图
Detail of front gland




隔板汽封详图(C2、P1-P15)
Detail of diaphragm gland



隔板汽封详图(P16-P17)
Detail of diaphragm gland



后汽封详图
Detail of rear gland

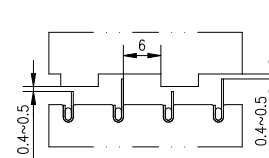

设 计

校 对

日 期

标记	处数	更改文件号	签 字	日 期	整体转子 Integral rotor	
设 计	3	审 定			0-0242-586C-0000-00	重量(Kg)
校 对	3	日 期	20260115		青岛捷能汽轮机集团股份有限公司	
审 核	3	共 页	第 页		QINGDAO JIENENG STEAM TURBINE GROUP CO.,LTD	