


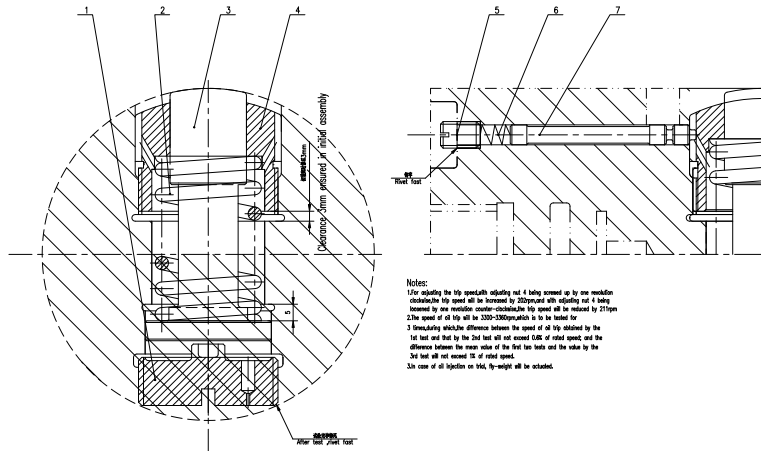

Notes:
1./or adjusting the trip speed,with adjusting nut 4 being screwed up by one revolution clockwise,the trip speed will be increased by 200rpm, and with adjusting nut 4 being loosened by one revolution counter-clockwise,the trip speed will be reduced by 210rpm
2.The speed of oil will be 3200-3300rpm,which is to be tested for
3 time,during which,the difference between the speed of oil obtained by the 1st test and that by the 2nd test will not exceed 0.6% of rated speed, and the difference between the mean value of the first two tests and the value by the 3rd test will not exceed 1% of rated speed.
3.in case of oil injection on trial, the weight will be actuated.

				危急建新县 Emergency Governor	
				0-0311-0010-0001-21	
				青岛捷能汽轮机集团股份有限公司 QINGDAO JENENG STEAM TURBINE GROUP CO., LTD.	

7	4-3101-2018-0856-00	脚踏板	1	4-3101-2018-0856-00	4	2Cr13-5	0.006	0.006	
6	4-3101-4010-0500-00	弯角	1	4-3101-4010-0500-00	4	镀锌板 304	0.0002	0.0002	
5		无磁不锈钢管Φ48×6	1	GB/T73-1985		35	0.001	0.001	
4	4-3101-1533-4200-02	连接管等	1	4-3101-1533-4200-02	4	2Cr13-5	0.15	0.15	
3	4-3101-2021-2301-01	飞轴	1	4-3101-2021-2301-01	4	38CrMoAl-5+6	0.188	0.188	
2	4-3101-4008-2600-00	弯角	1	4-3101-4008-2600-00	4	60Si2MnA-5	0.069	0.069	备件1
1	4-3101-2233-4200-00	螺栓	1	4-3101-2233-4200-00	4	35-1	0.18	0.18	
序号	物料号	名称	数量	物料号	规格	材料	重量	总重	备注