


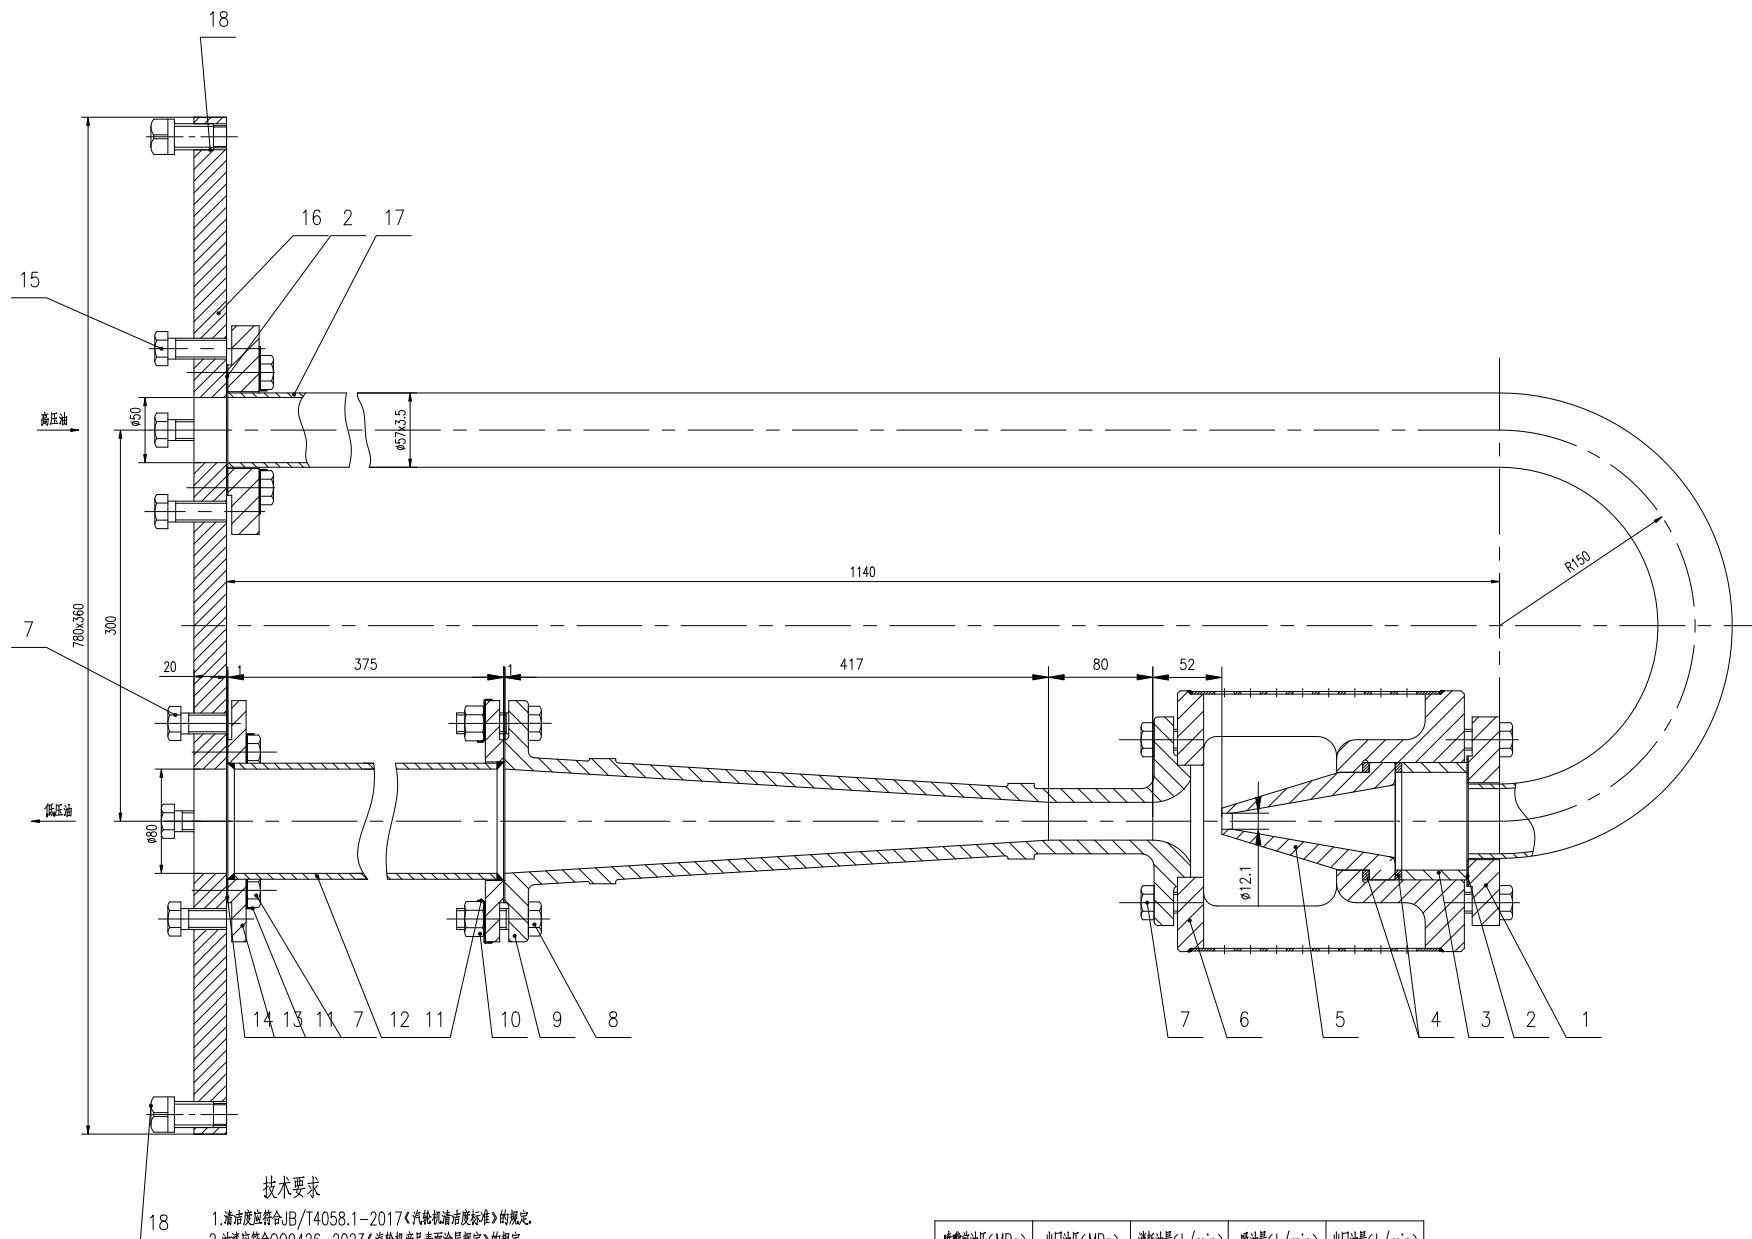

技术要求

1. 油净度应符合JB/T4058.1-2017《汽轮机油净度标准》的规定。
2. 油漆应符合QQ9426-2023《汽轮机产品表面涂层规定》的规定。
3. 用户可根据现场情况调整喷嘴直径或喷嘴与扩压器之间的距离未达到所需要的油压。

NOTE:

1. The oil ejector complies with JB/T4058.1-2017 Cleanliness Standard for Steam Turbines.
2. The oil ejector complies with QQ9426-2023 Painting Specifications for Steam Turbines.
3. Diameter of nozzle or the distance between nozzle and diffuser will be adjusted to achieving required outlet oil pressure at the side by customer.

喷嘴前油压(MPa)	出口油压(MPa)	消耗油量(L/min)	吸油量(L/min)	出口油量(L/min)
Oil press before nozzle	Outlet oil press	HP oil rate flow	Inlet oil flow	Outlet oil flow
1.2	0.25	~322	~253	~575

					高压注油器	
					HP OIL EJECTOR	
标记	处数	更改文件号	签字	日期	0-0703-0260-0000-03	重量(Kg)
设计	1	0				0
校对	1	0			20250624	
审核	1	0			共 页	第 页
					青岛捷能汽轮机集团股份有限公司	
					QINGDAO JIENENG STEAM TURBINE GROUP CO.,LTD	

设计

校对

日期