
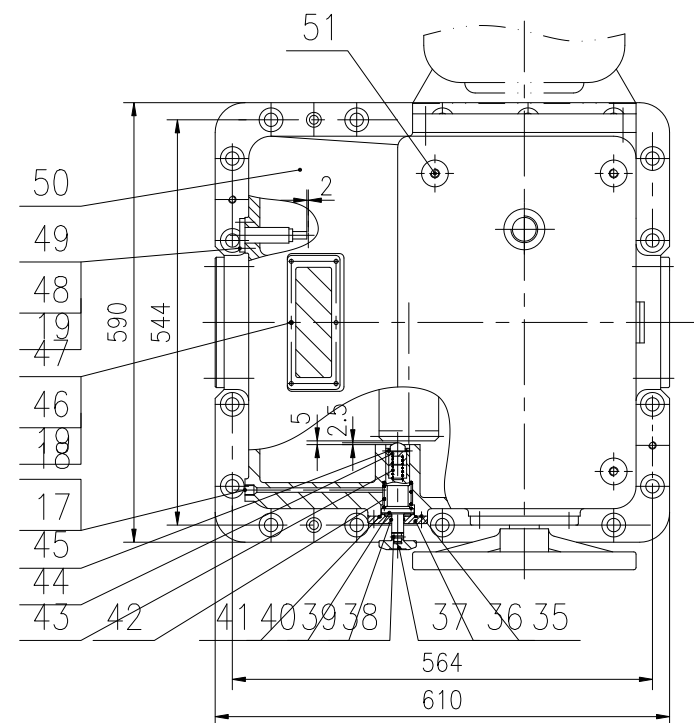
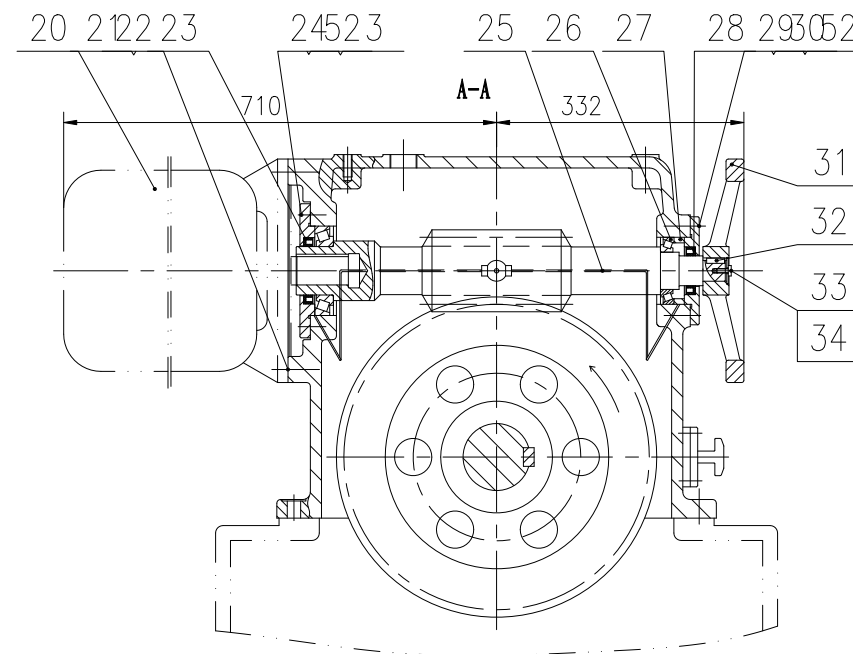


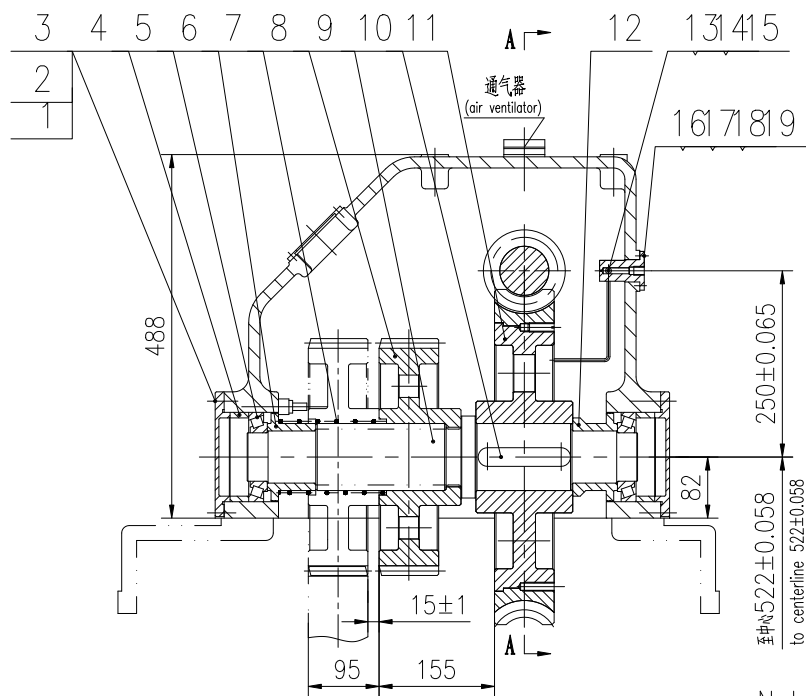

Notes:

- 1.Worm couple is guaranteed to have backlash j_{n1} of 0.185mm.
- 2.Worm wheel tooth surface will have contact stain not less than 55% of tooth heigh and of tine length respectively therealong.
- 3.Gear pair is guaranteed to have backlash j_{n2} of 0.21mm.
- 4.Gear tooth surface will have contact stain not less than 35% of tooth height and not less than 50% of tine length respectively therealong.
- 5.Axial clearance of bearing of worm shaft will be 0.05—0.10mm.
- 6.Axial clearance of bearing of worm wheel shaft will be 0.05—0.10mm.
- 7.In assembling turning gear device with rear bearing housing,the axial clearance between the pinion and bull gear will be guaranteed to be 15 ± 1 mm when they are detached from each other.
- 8.In assembly,parts 4 and parts 8 will be registered according to measured size.
- 9.Calcium—sodium soap grease or lithium based grease are to be used on the bearing of worm wheel.
- 10.Seal gum of brand Iron Anchor 603 are to be used in assembling parts 47 and 48.

技术要求

1. 蜗杆副保证侧隙 $j_{n1}=0.185$.
2. 蜗轮齿面接触斑点沿齿高不小于55%, 沿齿长不小于50%.
3. 齿轮副保证侧隙 $j_{n2}=0.21$.
4. 齿轮齿面接触斑点沿齿高不小于35%, 沿齿长不小于50%.
5. 蜗杆轴承的轴向间隙: 0.05—0.10.
6. 蜗轮轴承的轴向间隙: 0.04—0.07.
7. 盘车装置与后轴承座装配连结时, 应保证小齿轮与盘车大齿轮在脱开位置时的轴向间隙 15 ± 1 .
8. 件4, 28装配时根据实测尺寸配准.
9. 蜗轮轴承用钙钠基润滑脂或锂基润滑脂.
10. 件47, 48装配时涂密封胶(铁锚603).

设计
王振兴
校对
王强
日期
19.07

标记	处数	更改文件号	签字	日期
设计	1	王振兴	主管	
校对	1	王强	标准审查	
审核			审定	
工艺审查			日期	20190716

盘车装置

0-0281-0005-0000-00			
图样标记	重量 (WEIGHT)	比例 (SCALE)	
	343.6	1:7	
共	页	第	页
青岛捷能汽轮机集团股份有限公司 QINGDAO JIENENG STEAM TURBINE CO.,LTD			