




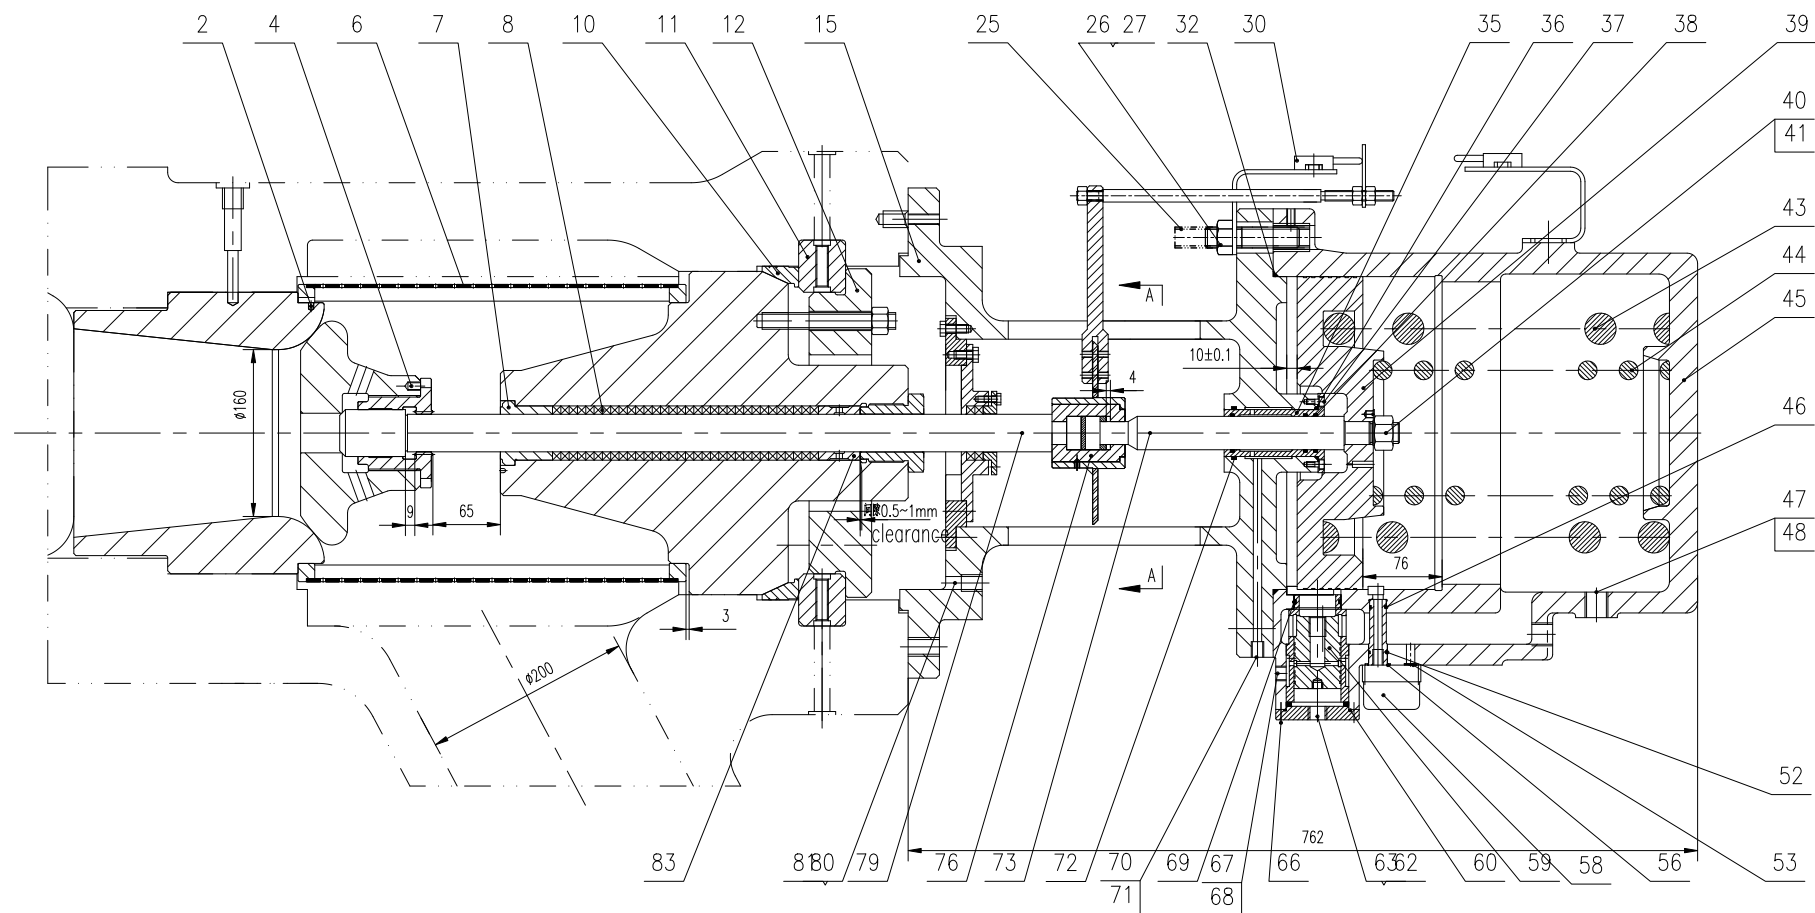

A-A



A向



技术要求

1. 拆装主汽门前将弹簧放松
2. 件8装入时, 切口须相互错位180°.
3. 填料初始压紧量不可太大, 阀杆处允许有微量泄漏, 运行一段时间

Notes:

1. Loosen spring before assembling and disassembling the main stop valve.
2. In mounting filler ring 8, the notches will be staggered by 180°.
3. Initial packing density of the filler will not be too large, with slight leakage allowable at the valve spindle. After running for a certain time, readjust the packing density of the filler for a complete sealing.

设计
朱加鹏
校对
王保社
日期
2014.03

标记	处数	更改文件号	签字	日期	主汽门 MAIN STOP VALVE	
设计	1	20140317	审定		0-0301-0320-3000-00	
校对	1	20140317	日期	20140317	青岛捷能汽轮机集团股份有限公司	
审核	1	20140317	共1页	第1页	QINGDAO JIENENG STEAM TURBINE GROUP CO., LTD.	