

绝密

设计


郭静怡

校对

袁涛

日期

2026.01

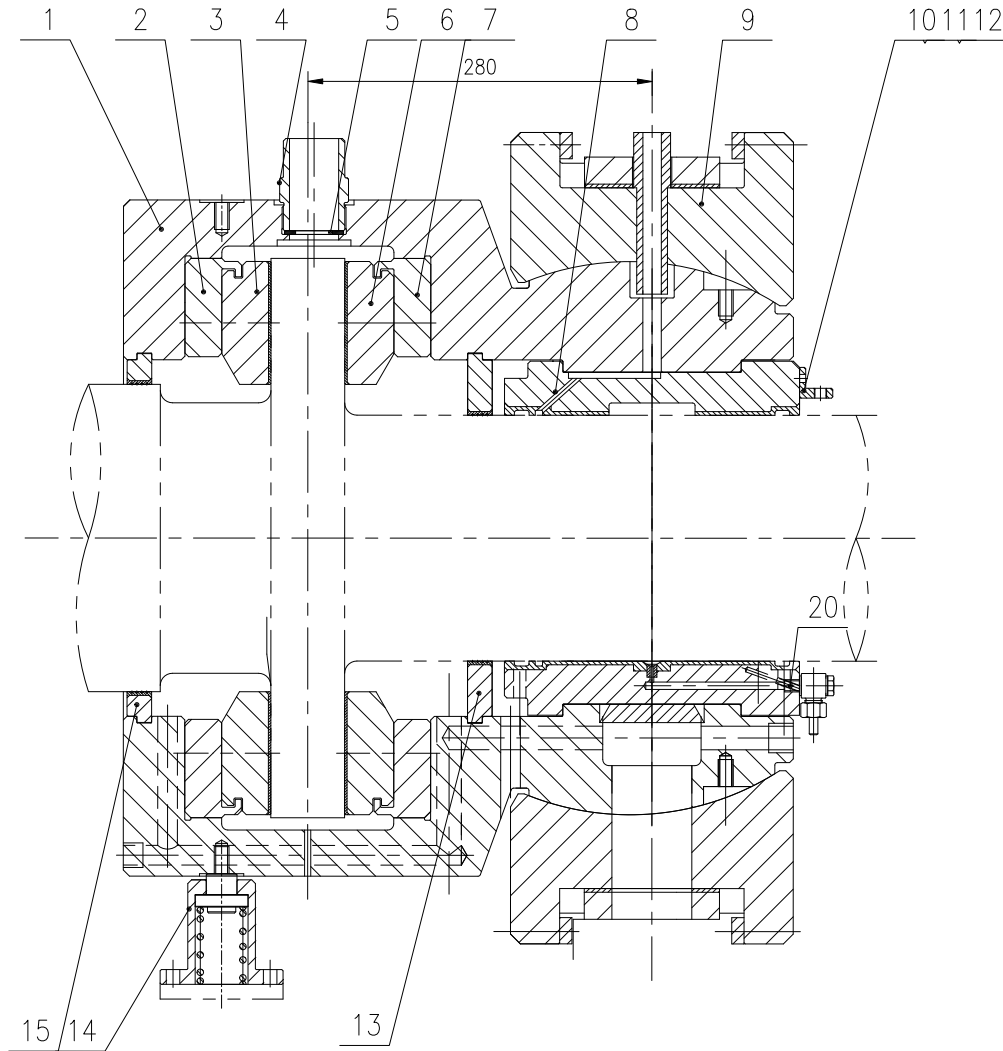


技术要求

- 1.总装时修整弹簧座顶面尺寸,使轴承中分面在水平位置。
- 2.热电阻引出线应预先包扎,套好套管。
- 3.装配时,在球面座螺栓拧紧后,球面座与轴承体应具有0.02~0.04mm紧力,球面接触面积不小于70%。
- 4.A处节流孔数,可根据机组实际运行情况,进行调整。
- 5.轴瓦与轴颈半径间隙0.16~0.18mm,半径间隙0.31~0.33mm。
- 6.调整球面座上垫块下垫片,使轴承座对垫块外圆过盈0.06~0.08mm。


- 7.调整轴承中心时可以抽换球面座垫块下面的垫片,使垫块,垫片的配合面接触均匀,接触面积不小于65%,调整结束后,用2~3片铜片替换原垫片。
- 8.调整付推力及安装环背面厚度,使推力盘与瓦块之间的间隙为0.4~0.45mm。
- 9.旋转方向,沿汽流方向看顺时针。
- 10.清油度应符合JB/T4058-1985《汽轮机清油度》的规定。
- 11.总装时,应符合JB/T9637-1999《汽轮机总装技术条件》的规定。
- 12.主推力瓦和付推力瓦各为8块,安装时均匀分布。

schematic lead-out wire for thermistor
热电阻引线引出示意图
1:1

AFP安装线<2芯>0.1mm²
Mounting cable(twisted pair)

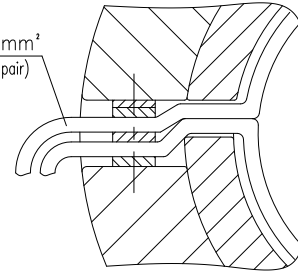

schematic lead-out wire for thermistor
热电阻引线引出示意图
A向

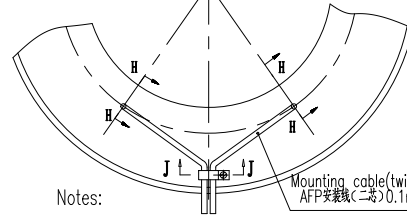


Notes:

- 1.In assembly,dress the top of spring seat so as to keep the nearing split horizontal.
- 2.In advance,wrap the lead wires for thermistors and put sheathes on.
- 3.In assembly,with the bolts for spherical seat being tightened up,a tightening force 0.02~0.04mm will be reserved between the spherical seat and bearing body,the contact area of the spherical surface will be not less than 70% of the total area.
- 4.The throttle plate at detail A is to be adjusted according to practical running condition of the unit.
- 5.Between the bearing liner and journal,a radial clearance 0.16~0.18mm will be reserved at the top and 0.31~0.33mm at the side.
- 6.Adjust the shim beneath the pad for the spherical seat for an interference fit 0.06~0.08mm between the bearing seat and the circumference of pad.
- 7.In adjusting the centerline of the bearing,may draw out and replace the shim beneath pad for spherical seat so that the pad meet the shim evenly at their faying surface with contact surface area not less than 65%. After the adjustment, 2 or 3 steel sheets will be used to replace the
- 8.Change the back thickness of the mounting ring for auxiliary thrust pads for a clearance 0.4~0.45mm between the thrust collar and pads.
- 9.A ckw rotation hand is adopted,seeing from the steam flow.
- 10.This bearing complies with JB/T4058-1999 Cleanness of Steam Turbines in clean condition.
- 11.The thrust bearing will be assembled according to JB/T9637-1999 General Assembly Specifications for Steam Turbines.
- 12.The thrust bearing has eight aux thrust pad and eight main thrust pad, which will be average distributed assembly.

D-D
1:1



H-H旋转H-H Rotation
1:1




热电阻
thermistor
胶黏剂封牢
stuck fast with adhesive

J-J
2:1



schematic drawing of fixing thermistor to thrust pad
推力瓦块热电阻安装示意图
1:1

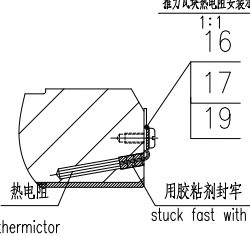

热电阻
thermistor
用胶黏剂封牢
stuck fast with adhesive

推力轴承前轴承

0-0084-4420-0000-03

图样标记 重量 比例

888 1:4

共 页 第 页

青岛捷能汽轮机集团股份有限公司

标记	处数	更改文件号	签字	日期
设计	郭静怡	主管		
校对	袁涛	标准审查		
审核		审定		
工艺审查		日期	20260114	