

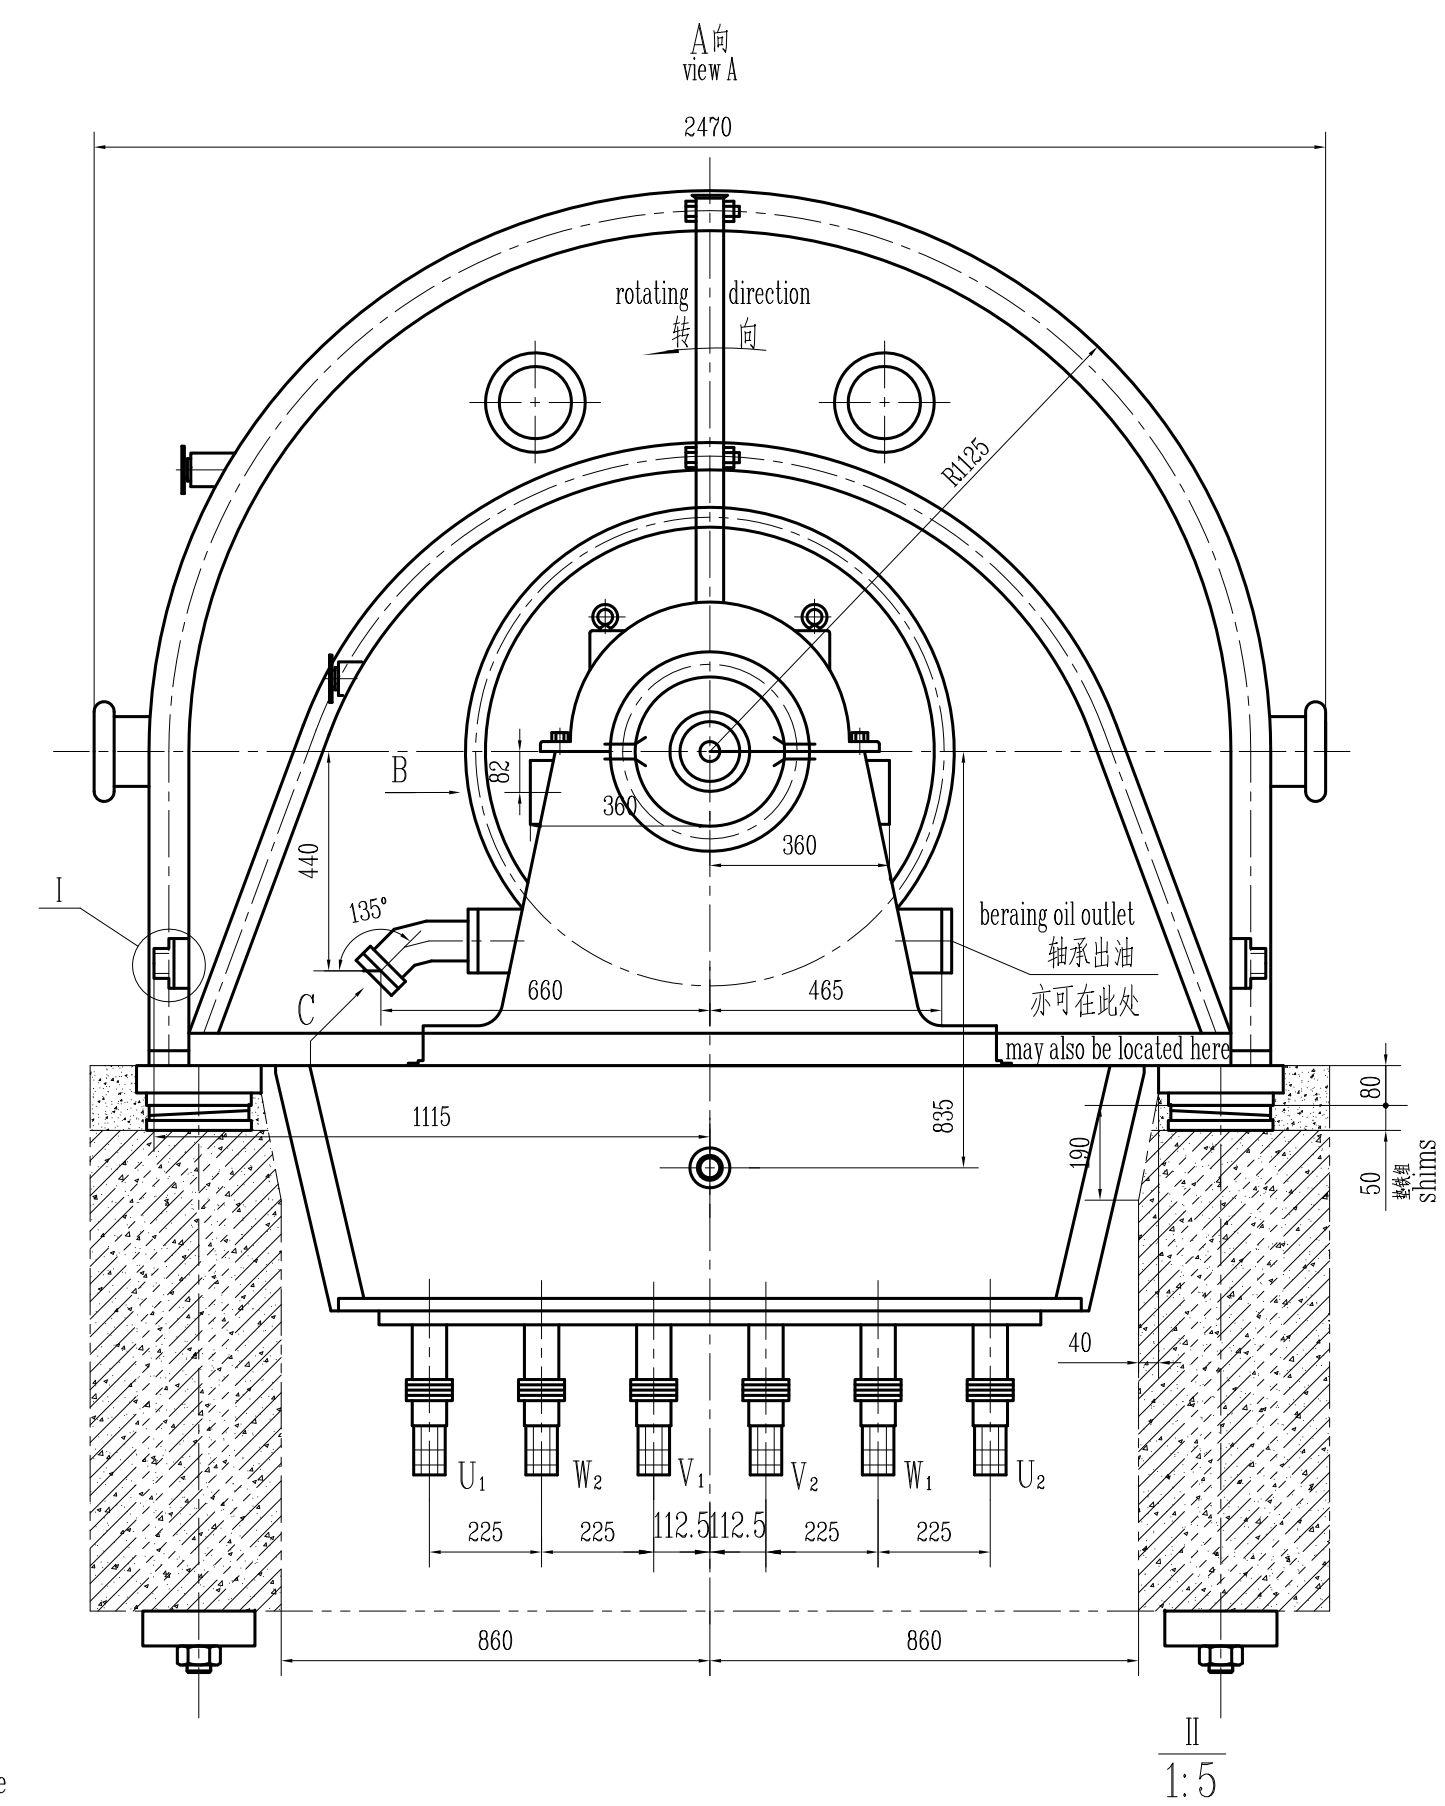
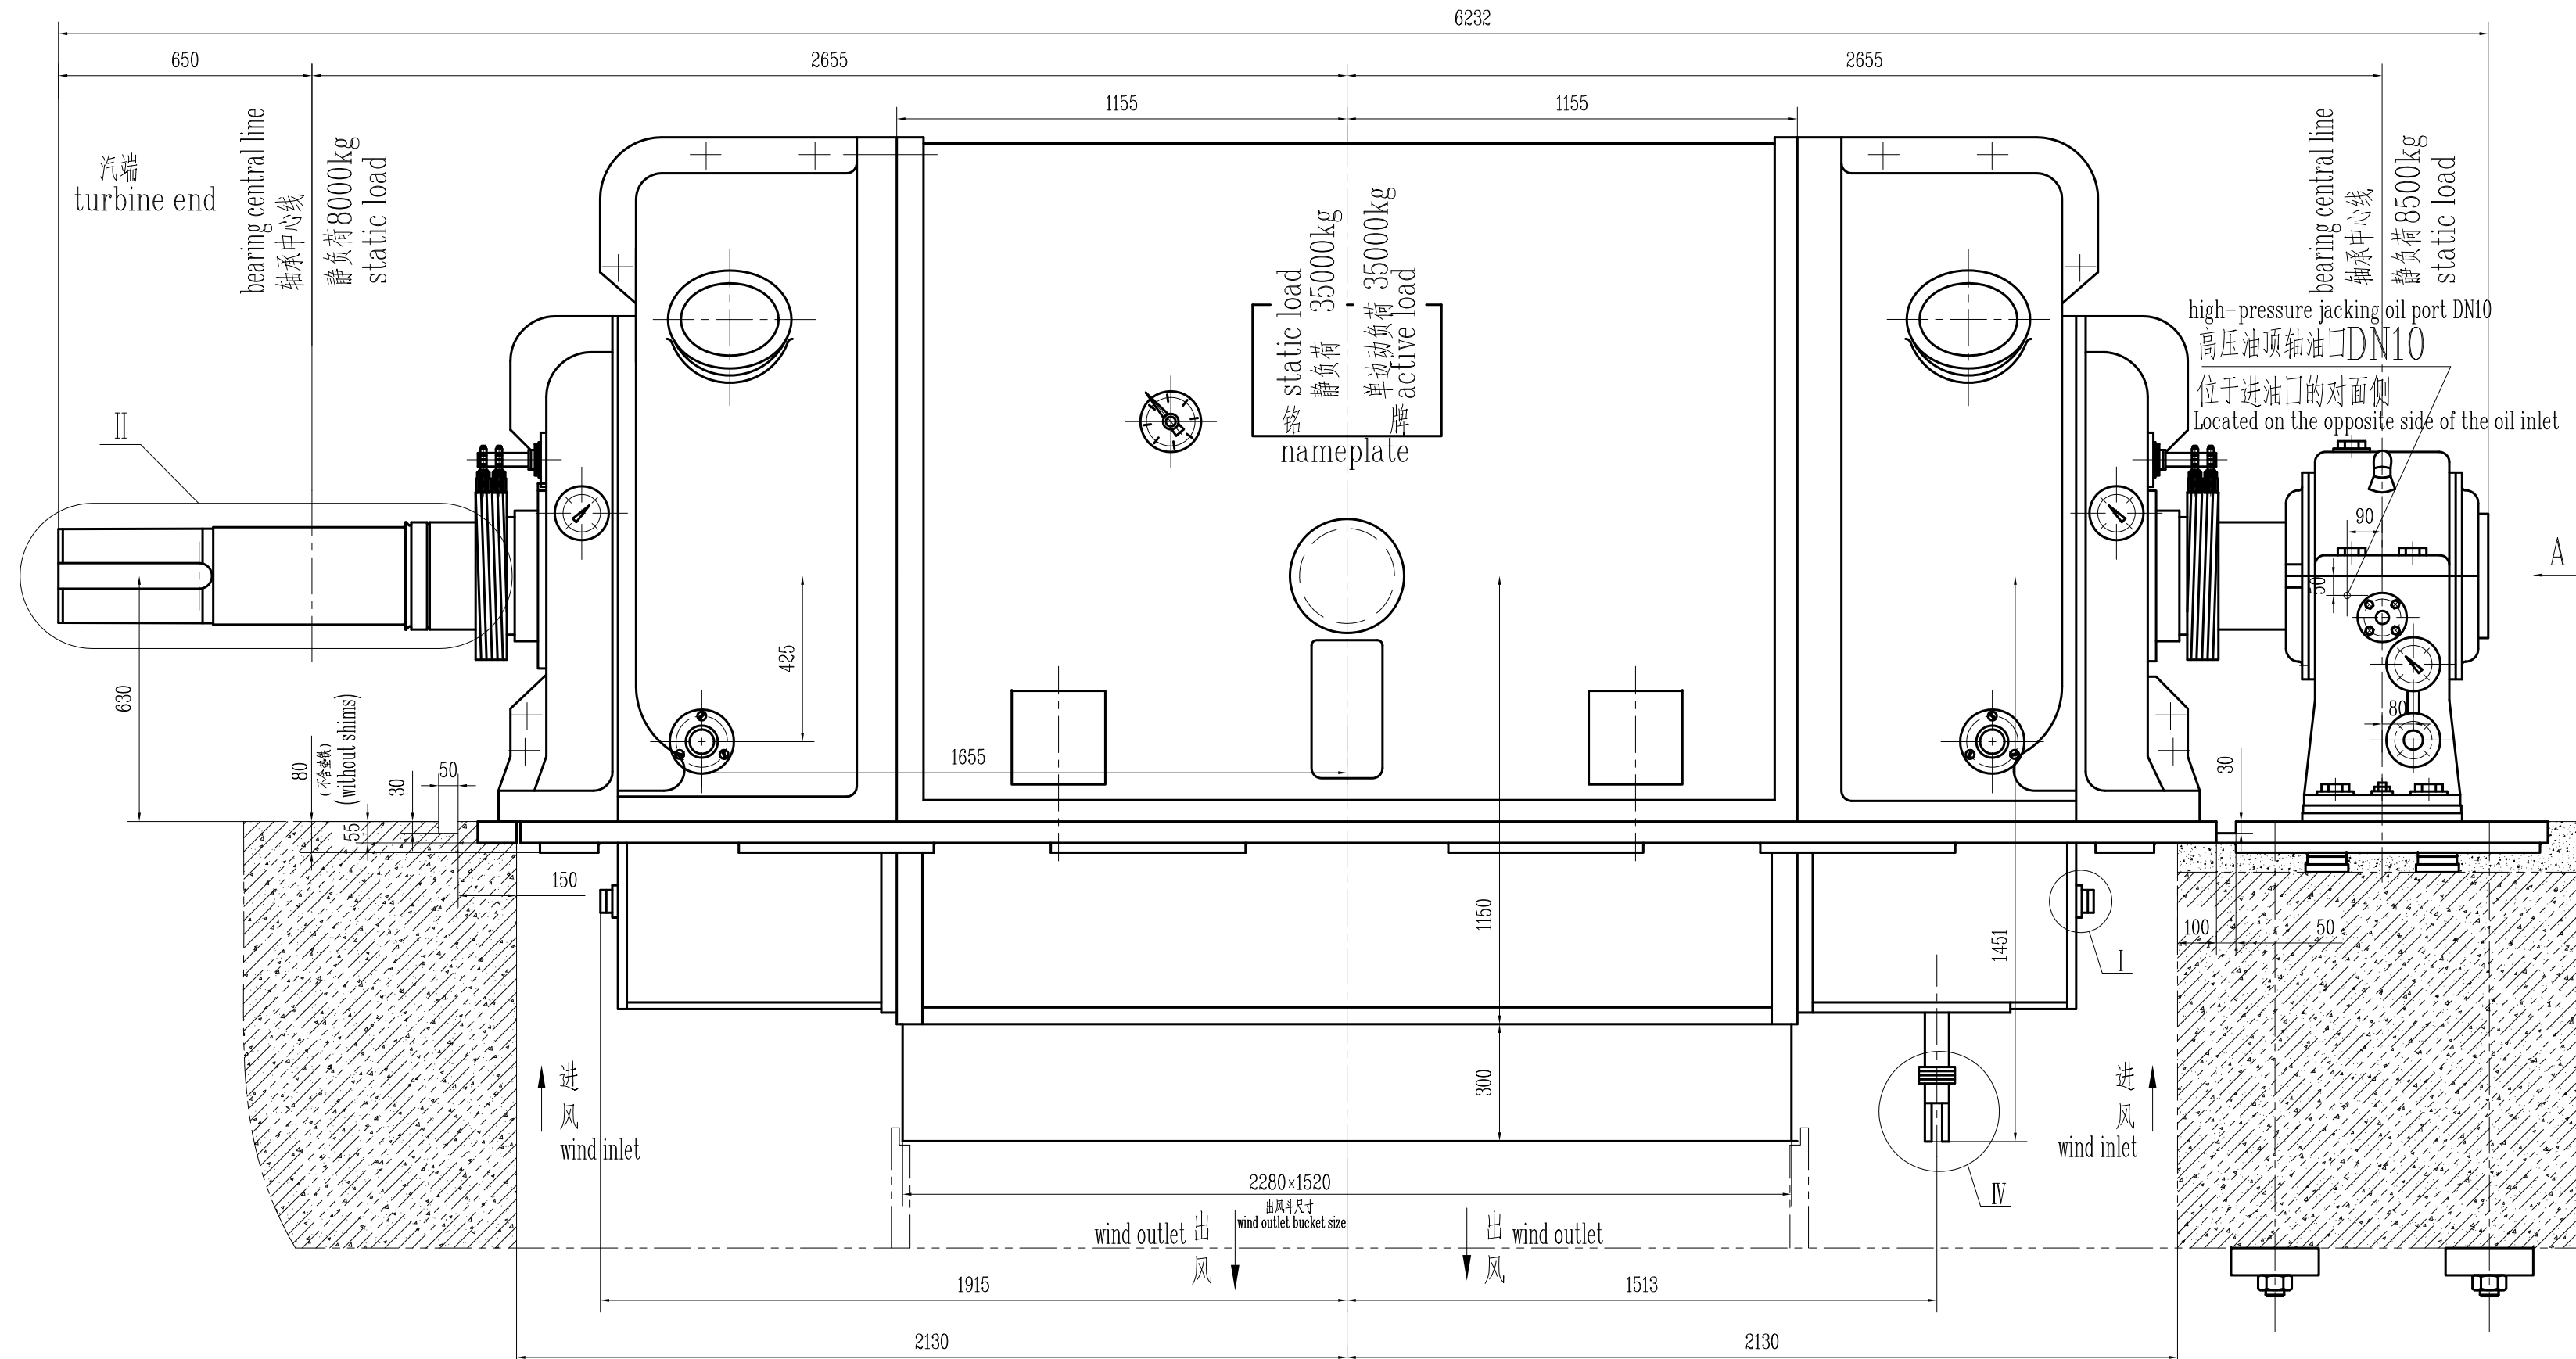
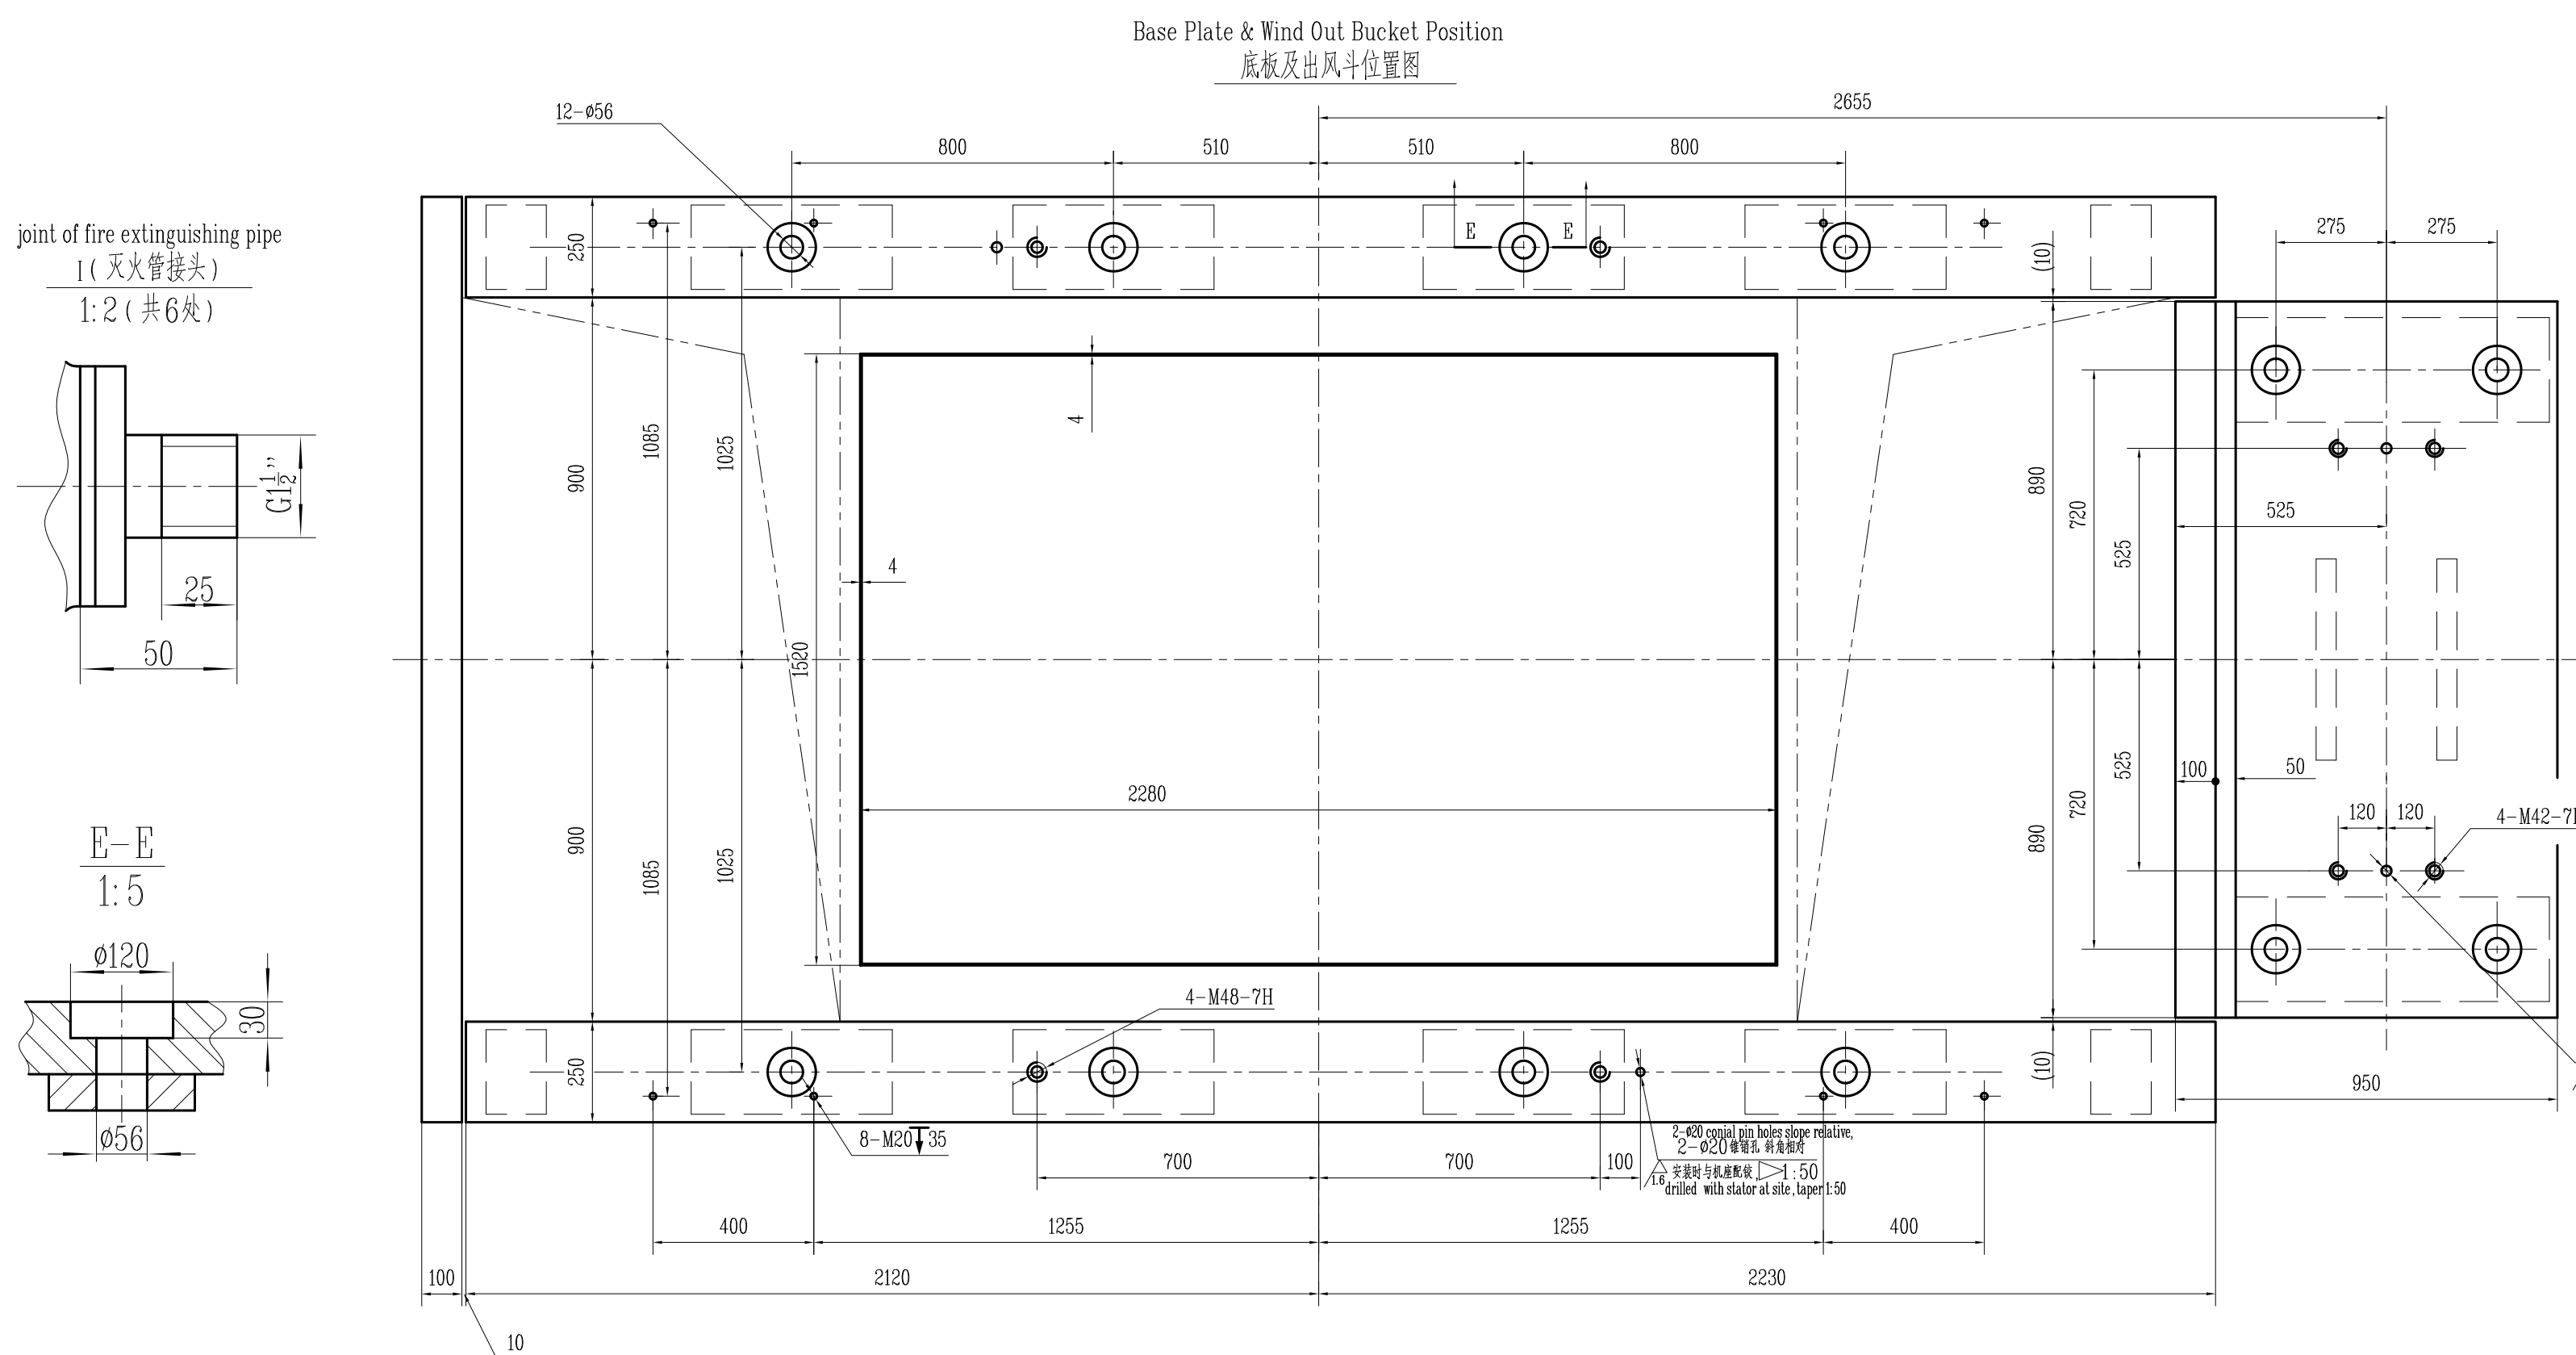
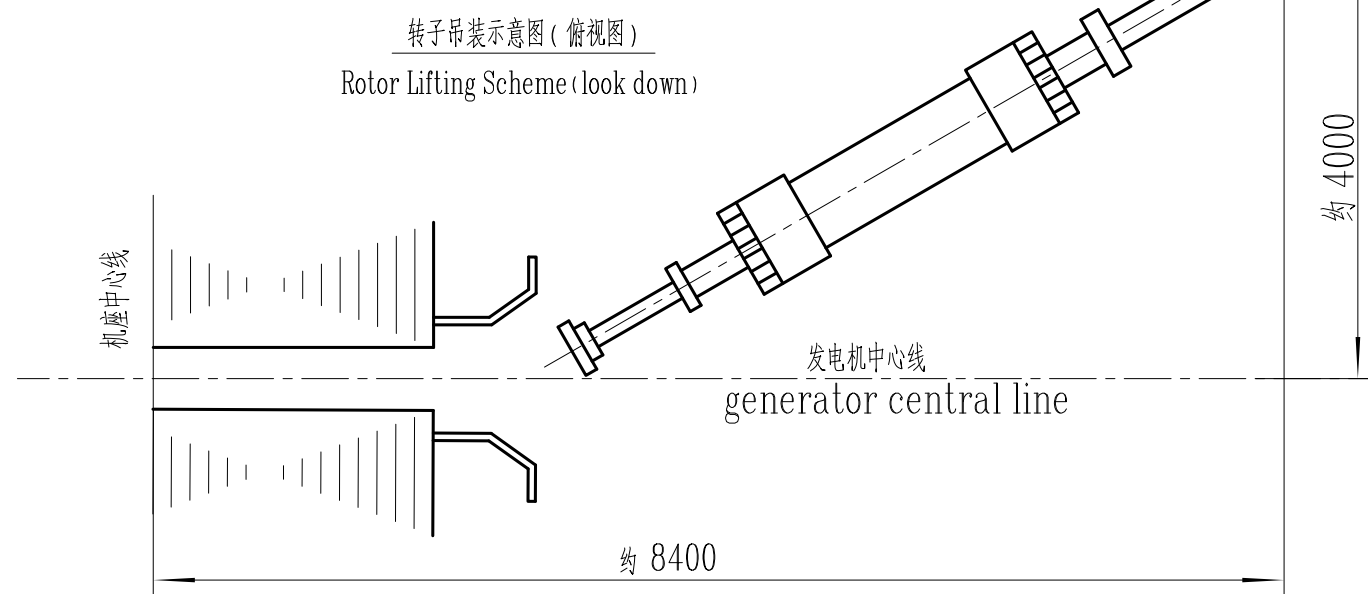
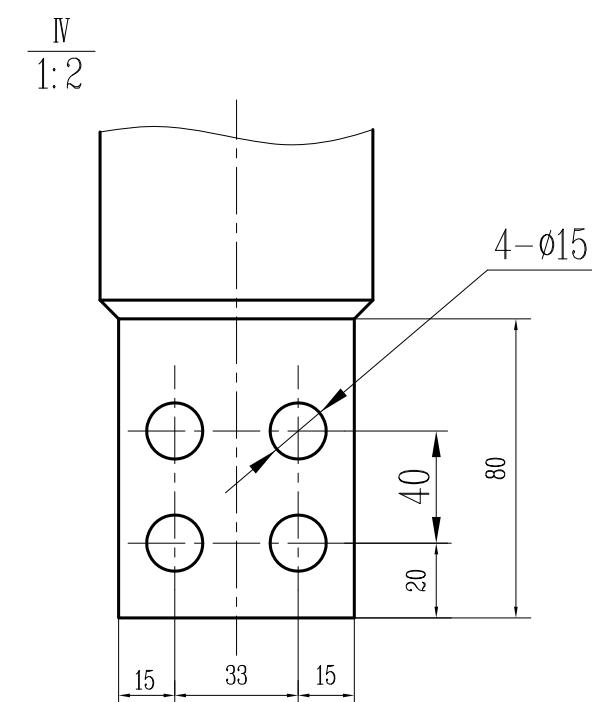
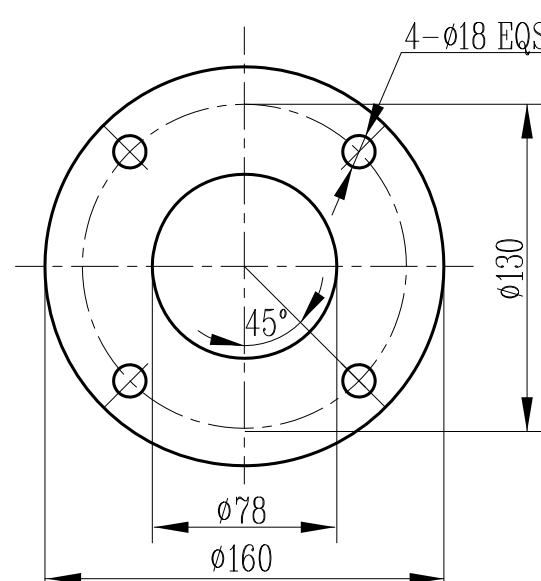
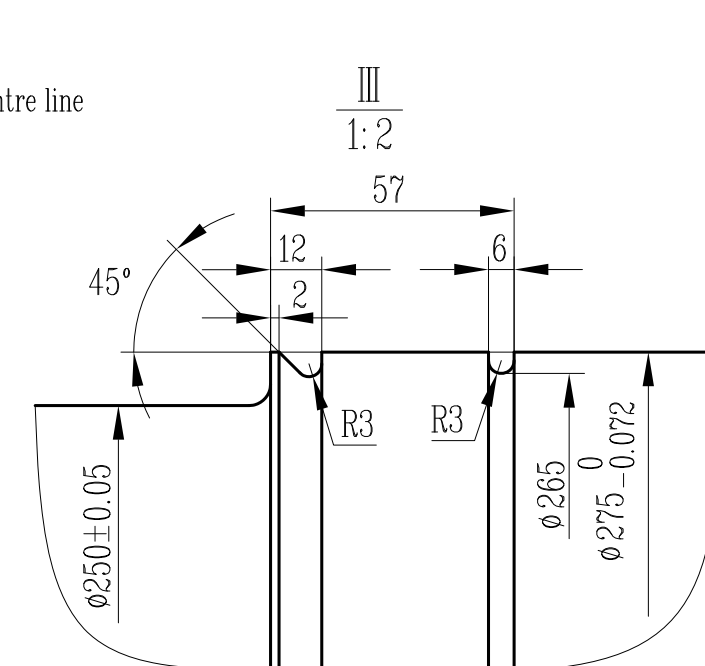
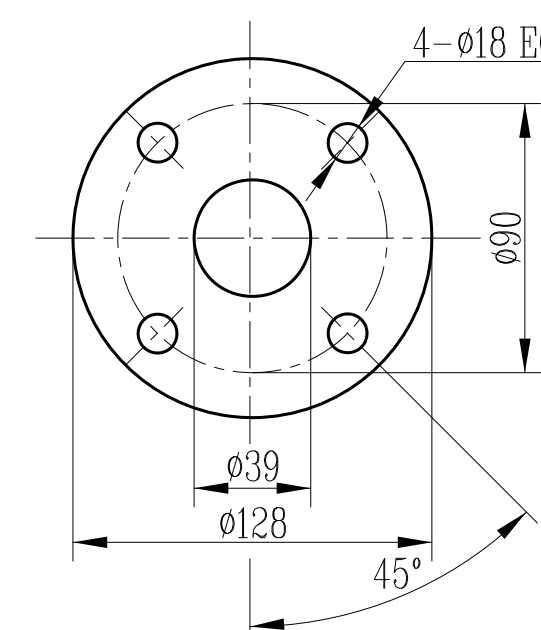


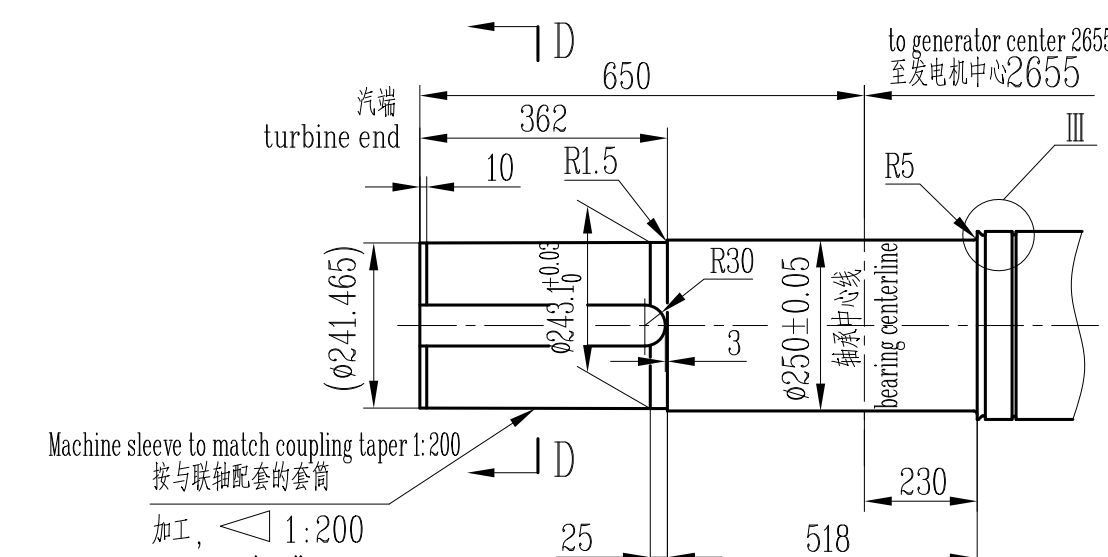

技术参数	
Technical Parameters	
1. 额定功率: rated power:	20000kW
2. 额定电压: rated voltage:	10500V
3. 额定电流: rated current:	1293.8A
4. 功率因数: power factor:	0.85 (滞后)
5. 额定转速: rated speed:	3000r/min
6. 临界转速: critical speed:	1450/3900r/min
7. 飞轮力矩GD ² : flywheel torque:	2.5t·m ²
8. 突然短路电动力矩倍率: electro-magnetic loque time at short circuit:	8
9. 冷却空气量: cooling air volume:	15.6m ³ /s
10. 发电机轴承耗油量: oil for generator bearing:	45L/min
11. 转子重量: rotor weight:	11.77t
12. 定子重量: stator weight:	28t
13. 轴承重量: bearing weight:	0.8t
14. 最大运输重量(定子和端盖、底盖): max. transportation weight (stator with end/bottom cover):	30t
15. 三相短路力矩: 3-phase short-circuit torque	$6.6 \times 10^4 \text{ N} \cdot \text{m}$
16. 绝缘等级: insulation class	F
17. 旋转方向: rotation direction	从汽轮机端看为顺时针方向 viewed from steam turbine

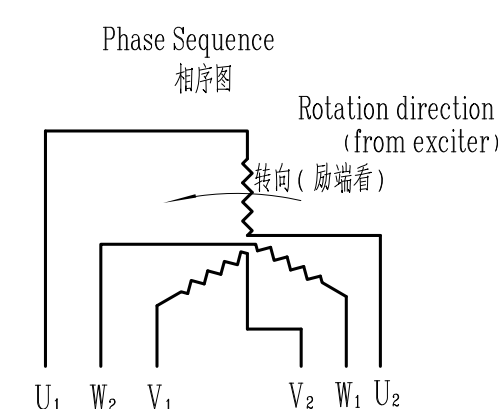

				T332-0-000-1			
				图样标记 版本号 重量 比例			
				1:15			
				共 张 第 张			
				四川嘉州东风电机有限公司			
				SI CHUAN JIAZHOU DONGFENG ELECTRIC MACHINERY CO., LTD.			